



 **Star System[®]**
Distribuzione sistemi di sicurezza

CATALOGO



DOMOTICA

RG LUCE s.r.l. nasce oggi come un'azienda specializzata nell' illuminazione a LED ed opera nel settore dal 2009.

Le soluzioni che l'azienda propone nascono dal desiderio di soddisfare in maniera ottimale le esigenze del mercato dell'illuminazione, ponendo particolare attenzione alle richieste personalizzate al fine di dare massima soddisfazione al cliente. L'interazione che si viene così a creare porta all'ottimizzazione del prodotto finito e allo sviluppo di nuovi progetti di illuminazione.


La ricerca e l'innovazione in campo illuminazione a LED sono gli elementi che contraddistinguono il nostro gruppo di lavoro, unito dalla stessa passione nel realizzare prodotti altamente tecnologici in ambito illuminotecnico.

Uno staff composto da personale qualificato e di provata esperienza è messo a disposizione della Clientela per curare gli aspetti di carattere tecnico-commerciale e per garantire la necessaria assistenza in fase di progettazione del tuo impianto di illuminazione ed in particolare di luci a LED.

RG LUCE s.r.l is a company specialized in led lighting system,founded by who have rich experience in this field. We offer only the good quality led products to our customers. We make special attention to the custom-made requests in order to give maximum satisfaction.

Research and innovation are the elements that characterize our working group,the same passion to build cohesive ad the most technologically powerful can be offered in the lighting field.

We have a team with professional technical and business people with knowledge for LED light source,available and happy to give our customers 360° service.Once our clients start business with us,we are sure to become long term and worry free business partners.

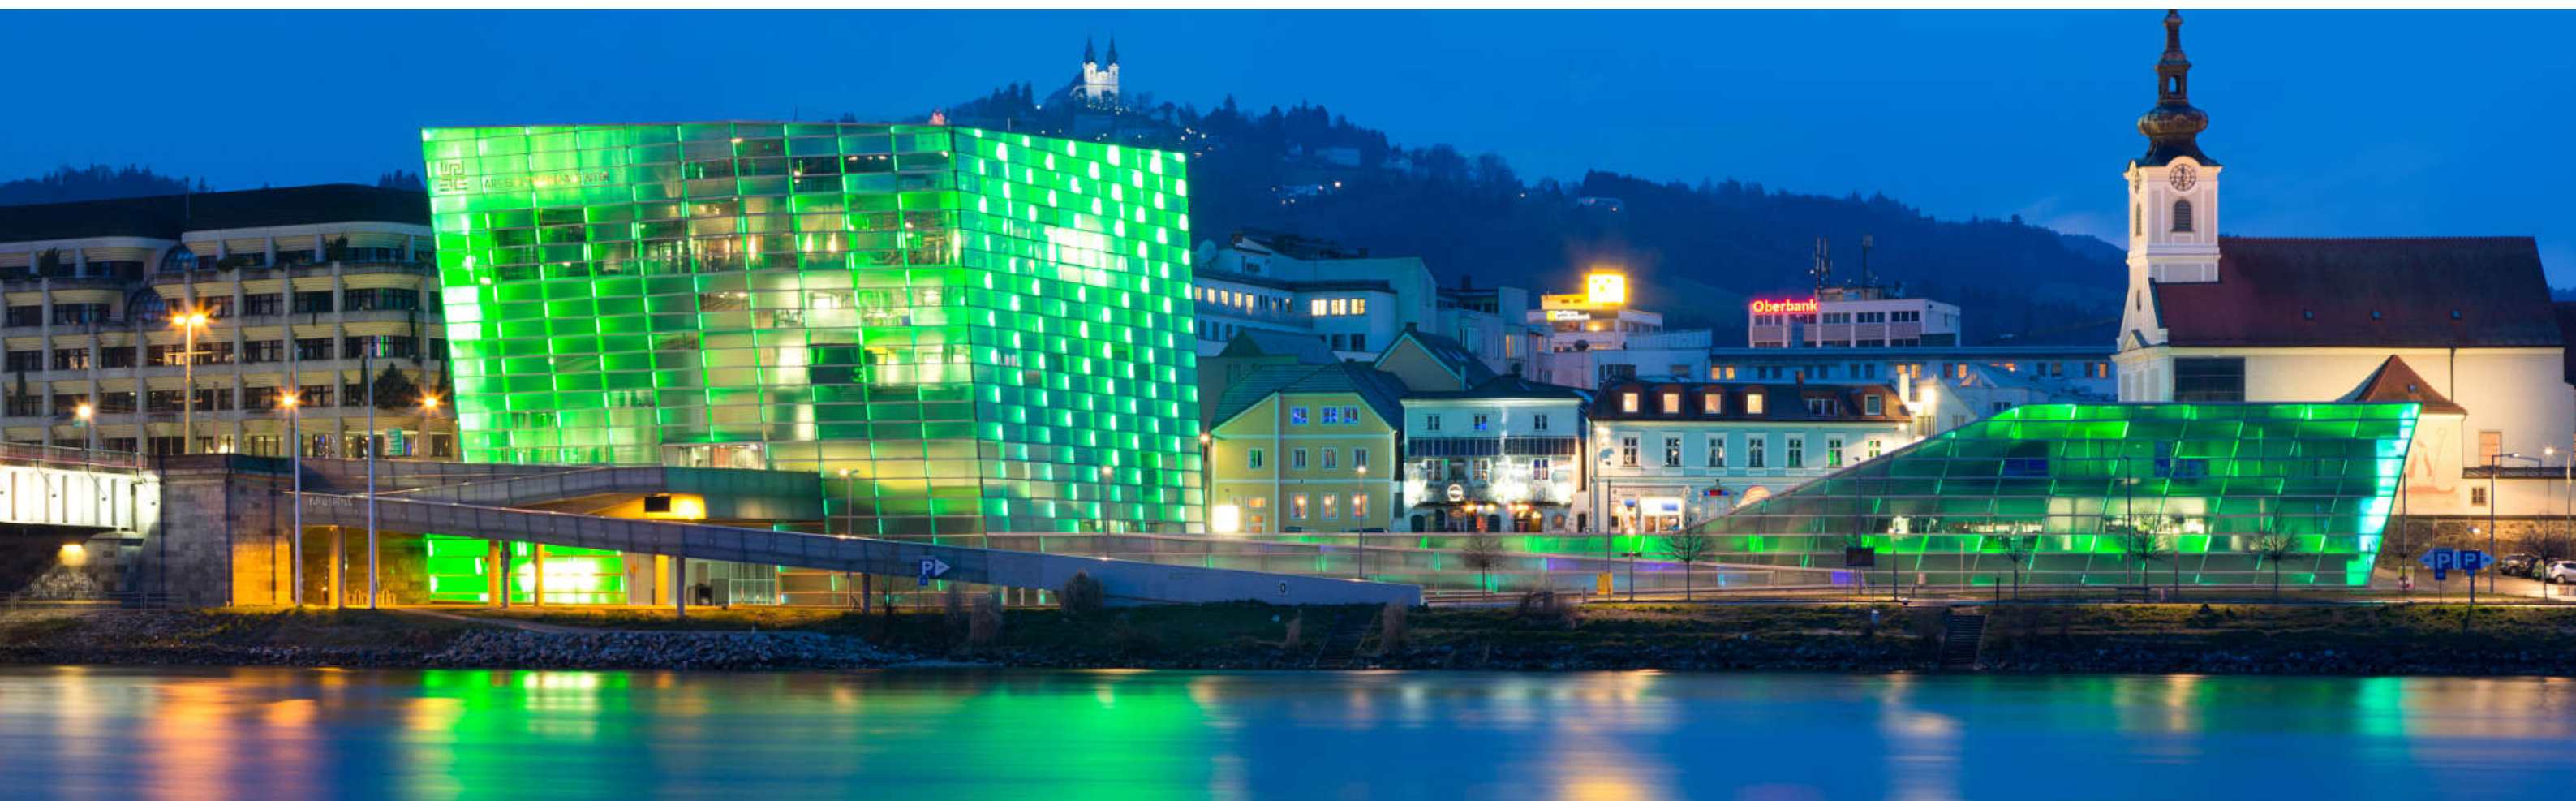

LED DOWNLIGHTS

01-24



CRI > 90

BL14



CRI > 90

BL16R



DALI CRI > 90

BL14S / BL14TS
BL21TS-DA

DALI CRI > 90

BL21T-DA / BL14T



MD7 / MD10



UGR < 16 SDCM < 3 UGR < 19

D9070 / D9100



D10075 / D10095



UGR < 19

D2070 / D2100
D2150 / D2130
D2205OD10T / OD14T
OD17T / OD25TODF10 / ODF14
ODF17 / ODF25

ODF40



LD386R / LD388R



LD486R / LD488R



CRI > 90

LD90K / LD145K
LD125K / LD170KLD640P-11
LD640P-12
LD640P-13

LED CEILING LIGHTS

25-36



IK10 IP65

C7022 / C7028 / C7033




IK10 IP65

C7220-A / C7280-A
C7330-A

IP44

CD0180 / CD0220
CD0300

IP44

CD1818 / CD2222
CD3030AR6W-CCT3
AR12W-CCT3
AR18W-CCT3
AR24W-CCT3

PDR09250 / PDR09400



D12090



IK08 CRI > 90

ML002-AM

LED LINEAR LIGHT

37-42



100* lm/W

L0601-AS
L1201-AS

100* lm/W

L1203-DA



UGR < 16 100* lm/W

L1203-DR



IP65

TRP-120A / TRP-120A-E TRP-120B / TRP-120B-E
TRP-150A / TRP-150A-E TRP-150B / TRP-150B-E

IK08 IP65

LED PANEL LIGHTS

43-56




UGR <19 100+ lm/W
P0610-DTMH



90+ lm/W
P6060BL



85+ lm/W
P3030 / P6060



85+ lm/W
P3060

UGR <19 CRI >90 100+ lm/W
IP54
P6060BLHU
P3120BLHU

100+ lm/W
P6060H

UGR <19 100+ lm/W
P6060HU

100+ lm/W
P3120H / P6120

UGR <19 100+ lm/W
P3120HU

LED TRACK LIGHTS

57-70



UGR <19 CRI >90
TS03R



CRI >90
TS03L



UGR <12 CRI >90
TS03LT



UGR <19 CRI >90
TS03S



UGR <19 CRI >90
TS03P01



CRI >90 Flicker free
TS12 / TSN12

LED GROUND LIGHTS

71-78



IP67
MINIFL-3W



IP67
MINIFS-3W



IP67
FL-3W



IP67
FS-3W



IP67
FT-3W



IP67
FL-3x1W



IP67
FL-6x1W



IP67
FL-9x1W




IP67
FL-3x3W-RGB
FL-9x1W-RGB



IP67
GL-3x1W
GL-3x3W-RGB

LED WALL LAMP

79-84



IP44
A615R1



IP44
A615R2



IP44
A615S1



IP44
A615S2



IP44
A615S3



IP66
A003CCT3



IP66
B003CCT3



IP65
A902-CCT



IP65
BH0116



IP65
BH0117



IP65
BH0118

LED FLOOD LIGHTS & STREET LIGHTS

85-94



IP44
FD200TW



IP65
FDB / FDCN



IP65
FDCN 3CCT PIR



IP65
FDCNR RGB



IP65
FDCNR RGBW



IP44
FDCN 3CCT



IP65
FDT 3CCT



IP65
FD50K6



IP65
FD50 / H2-2



IP65
J50-NW



IP65
Z120 / Z180

LED HIGH BAY LIGHTS

95-100



IP65
B0302 / B0303



IP65
B0601 / B1201



140+ lm/W
IP65
B1280 / B1320
B1360

LED STRIP

101-112



CRI > 90
R600/3528
R1200/3528



CRI > 90
R600/3014
R1020/3014



CRI > 90
R420/2835
R560/2835
R700/2835
R840/2835



R300RGB



R300RGB+WHITE



R600/3527



RCOB



CRI > 90
IP65
K0612
K0612-RGB

LED POWER SUPPLY & CONTROLLER

113-118



UT



Q8H-75W / Q3100W
Q8H150W



LT




0848



1127



0613



K-1040-IC320



Z9506



Z9508



2207-AMP

LED PROFILE SERIES

119-126



PR01EST
PR01-TP
PR01-ML



PR03INC
PR03-TP



PR04ANG
PR04-TP
PR04-ML



PR05CG
PR05-TP
PR05-ML



PR06
PR06-TP
PR06-ML



LED Down Lights & Ceiling Lights

■ PRESTAZIONI / PERFORMANCE

Serie di prodotti ideali per tutte le applicazioni ad incasso e a plafone in interno.

Ideali per l'illuminazione di uffici, zone comuni, aree di vendita, esposizioni ecc.

Una completa gamma di potenze, ottiche e diffusori danno la garanzia di poter trovare il prodotto corretto per ogni tipo di applicazione.

Series of products ideal for all indoor recessed and surface-mounted applications.

Ideal for lighting offices, common areas, sales areas, exhibitions, etc.

A complete range of powers, optics and diffusers give the guarantee of being able to find the correct product for each type of application.

Sistema Bolla



Simpatico e moderno, questo sistema si differenzia dalle classiche soluzioni nell'illuminazione decorativa.

La forma a "bolla", pulita e inusuale si unisce ad una completa gamma di corpi illuminanti adatti a coprire una moltitudine di soluzioni illuminotecniche nell'ambito della illuminazione architettonica.


Nice and modern, this system differs from the classic solutions in decorative lighting.

The clean and unusual "bubble" shape is combined with a complete range of lighting fixtures suitable for covering a multitude of lighting solutions in the field of architectural lighting.

- Il sistema si basa sull'utilizzo del medesimo corpo illuminante applicato con gli opportuni accorgimenti a plafone, incasso, su binario elettrificato e a sospensione.
- Distribuzione luminosa circolare con apertura di 36° o 60°, e potenze che vanno dai 10W sino ai 20W.
- Tutti gli apparecchi utilizzano LED di ultima generazione con alta resa cromatica CRI > 90.
Particolare attenzione è stata posta nello studio delle ottiche per garantire un elevato confort visivo e distribuzione luminosa ottimizzata.

- The system is based on the use of the same lighting body applied with the appropriate ceiling, recessed, electrified track and suspended devices.
- Circular light distribution with 36° or 60° opening, and powers ranging from 10W up to 20W.
- All the luminaires use latest generation LEDs with high color rendering CRI > 90.
Particular attention was paid to the study of the optics to ensure high visual comfort and optimized light distribution.



LED DOWN LIGHTS

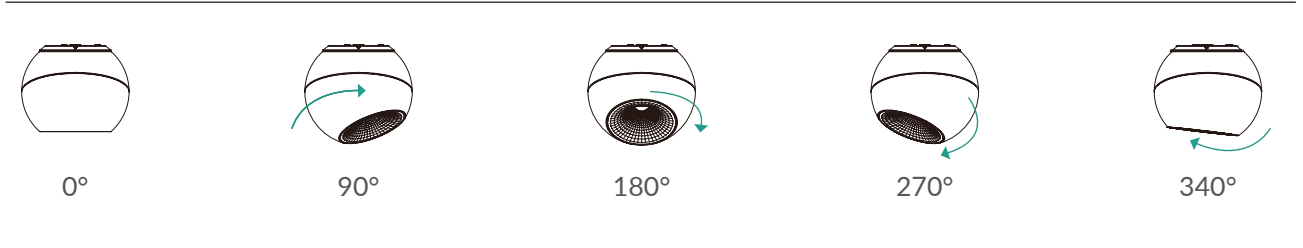

LED DOWN LIGHTS



- Bolla a plafone - Surface mounting Bolla**
- Corpo in alluminio verniciato nero
 - Driver integrato
 - Non dimmerabile
 - Garanzia: 3 anni
 - Aluminium body black finishing.
 - Driver built-in
 - No dimmable, no emergency function available
 - Warranty: 3 years

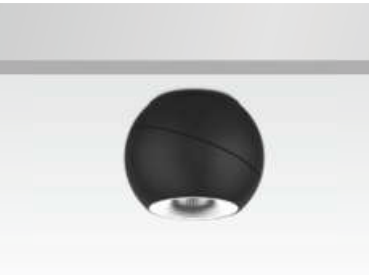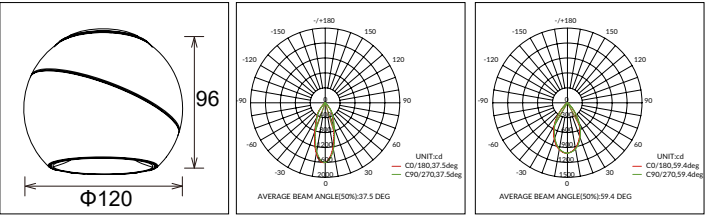

Surface mounted

CRI > 90


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL14-S	Nero Black	2700K	14W	1440LM	>90Ra	Φ120x96mm	0.81Kg
BL14-WW		3000K	14W	1520LM	>90Ra	Φ120x96mm	
BL14-NW		4000K	14W	1600LM	>90Ra	Φ120x96mm	





Bolla da incasso - Recessed monting Bolla


- Corpo in alluminio verniciato nero.
- Driver separato
- Dimmerabile per opzione
- Garanzia: 3 anni
- Aluminium body black finishing.
- Driver built-in, integrated design
- No dimmable, no emergency function available
- Warranty: 3 years

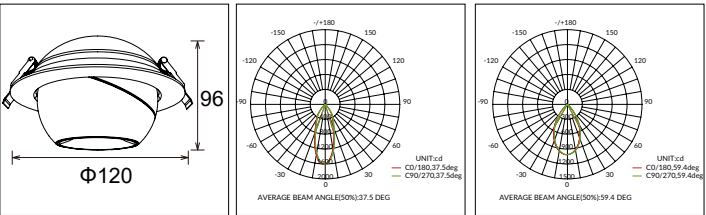

Recessed

CRI > 90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
BL16R-S	Nero Black	2700K	16W	1620LM	>90Ra	Φ172x100mm	Ø150-160mm	1.13Kg
BL16R-WW		3000K	16W	1700LM	>90Ra	Φ172x100mm	Ø150-160mm	
BL16R-NW		4000K	16W	1800LM	>90Ra	Φ172x100mm	Ø150-160mm	



LED DOWN LIGHTS

LED DOWN LIGHTS



LED DOWN LIGHTS


LED DOWN LIGHTS



Bolla a sospensione - Suspensione monting Bolla

- Corpo in alluminio verniciato nero.
 - BL14S/BL14TS driver integrato non dimmerabile
 - BL21TS dimmerabile DALI
 - Garanzia: 3 anni
- Aluminium body black finishing.
 - BL14S/BL14TS on-off driver built-in
 - BL21TS DALI dimmable
 - Warranty: 3 years

CRI > 90

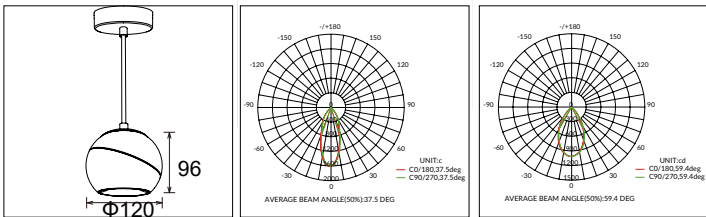


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL14S-S	Nero Black	2700K	14W	1450LM	>90Ra	Φ120x96mm	0.98Kg
BL14S-WW		3000K	14W	1520LM	>90Ra	Φ120x96mm	0.98Kg
BL14S-NW		4000K	14W	1600LM	>90Ra	Φ120x96mm	0.98Kg



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL14TS-S	Nero Black	2700K	14W	1450LM	>90Ra	Φ120x96mm	0.98Kg
BL14TS-WW		3000K	14W	1520LM	>90Ra	Φ120x96mm	0.98Kg
BL14TS-NW		4000K	14W	1600LM	>90Ra	Φ120x96mm	0.98Kg



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL21TS-SDA	Nero Black	2700K	21W	1900LM	>90Ra	Φ120x96mm	1.01Kg
BL21TS-WWDA		3000K	21W	2000LM	>90Ra	Φ120x96mm	
BL21TS-NWDA		4000K	21W	2100LM	>90Ra	Φ120x96mm	



LED DOWN LIGHTS

LED DOWN LIGHTS



CRI > 90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL21T-SDA	Nero Black	2700K	21W	1900LM	>90Ra	Φ120x96mm	1.01Kg
BL21T-WWDA		3000K	21W	2000LM	>90Ra	Φ120x96mm	
BL21T-NWDA		4000K	21W	2100LM	>90Ra	Φ120x96mm	

220V
240V
50/60Hz

36°60°

CE

RoHS

Indoor

IP20


L70 to
50000hrs

LED DOWN LIGHTS



Bolla a Binario - Track monting Bolla

- Corpo in alluminio verniciato nero.
 - BL14T driver integrato non dimmerabile
 - BL21T dimmerabile DALI
 - Garanzia: 3 anni
- Aluminium body black finishing.
 - BL14T on-off driver built-in
 - BL21T DALI dimmable
 - Warranty: 3 years

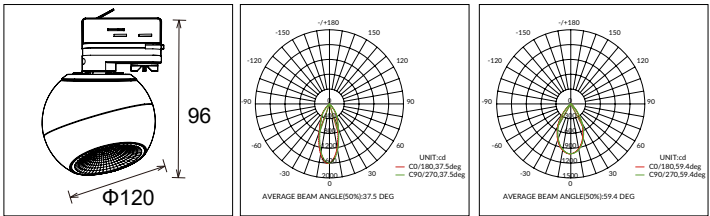

CRI > 90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
BL14T-S	Nero Black	2700K	14W	1450LM	>90Ra	Φ120x96mm	0.98Kg
BL14T-WW		3000K	14W	1520LM	>90Ra	Φ120x96mm	0.98Kg
BL14T-NW		4000K	14W	1600LM	>90Ra	Φ120x96mm	0.98Kg

220V
240V
50/60Hz

36°60°

CE

RoHS

Indoor

IP20

L70 to
50000hrs


LED DOWN LIGHTS

LED DOWN LIGHTS



LED Melody Downlight

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0
 - Gruppo ottico basculante di 30°.
 - Driver integrato non dimmerabile.
 - Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
 - V-0 classification
 - 30° tilting optical unit.
 - Integrated non-dimmable driver.
 - Warranty: 3 years

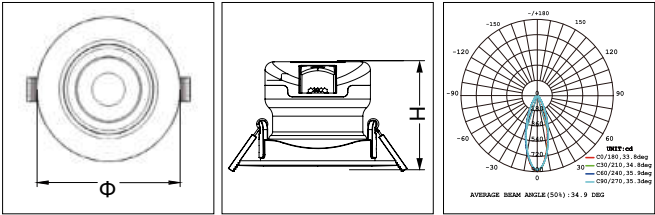



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
MD7-WW	Bianco White	3000K	6.5W	590LM	>80Ra	Φ85x43.8mm	Φ68-75mm	0.20Kg
MD7-NW		4000K	6.5W	650LM	>80Ra	Φ85x43.8mm	Φ68-75mm	
MD10-WW	Bianco White	3000K	10W	950LM	>80Ra	Φ105x71mm	Φ83-95mm	0.23Kg
MD10-NW		4000K	10W	1000LM	>80Ra	Φ105x71mm	Φ83-95mm	



LED Miracle Downlight

- Corpo in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato dimmerabile triac.
 - Garanzia: 3 anni
- Body in thermo-conductive plastic.
 - V-0 classification.
 - Integrated triac dimmable driver.
 - Warranty: 3 years

SDCM <3

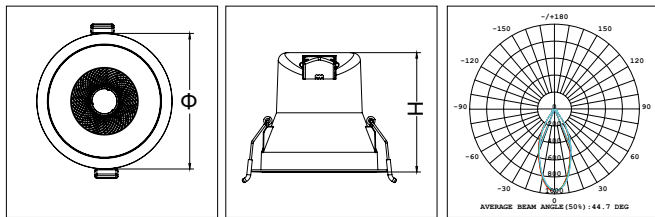

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
D9070-A1M-WW	Bianco White	3000K	6W	550LM	>80Ra	Φ81x79mm	Φ68-73mm	0.20Kg
D9070-A1M-NW		4000K	6W	600LM	>80Ra	Φ81x79mm	Φ68-73mm	
D9100-A1M-WW	Bianco White	3000K	9W	810LM	>80Ra	Φ103x91mm	Φ90-95mm	0.23Kg
D9100-A1M-NW		4000K	9W	900LM	>80Ra	Φ103x91mm	Φ90-95mm	
D9070-A1B-WW	Nero Black	3000K	6W	460LM	>80Ra	Φ81x79mm	Φ68-73mm	0.20Kg
D9070-A1B-NW		4000K	6W	500LM	>80Ra	Φ81x79mm	Φ68-73mm	
D9100-A1B-WW	Nero Black	3000K	9W	680LM	>80Ra	Φ103x91mm	Φ90-95mm	0.23Kg
D9100-A1B-NW		4000K	9W	730LM	>80Ra	Φ103x91mm	Φ90-95mm	



LED DOWN LIGHTS



LED Magic Downlight


- Anello in alluminio verniciato bianco.
 - Dissipatore in alluminio verniciato nero
 - Gruppo ottico orientabile di 350°e basculante di 30°.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- White painted aluminum ring.
 - Black painted aluminum heatsink
 - Optical unit adjustable by 350 ° and tilting by 30 °.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
D10075-AM-WW	Bianco White	3000K	10W	750LM	>80Ra	Φ85x98mm	Φ73-78mm	0.20Kg
D10075-AM-NW		4000K	10W	850LM	>80Ra	Φ85x98mm	Φ73-78mm	
D10095-AM-WW	Bianco White	3000K	15W	1125LM	>80Ra	Φ105x113mm	Φ90-93mm	0.23Kg
D10095-AM-NW		4000K	15W	1275LM	>80Ra	Φ105x113mm	Φ90-93mm	




LED Legend Downlight

- Anello e corpo in alluminio verniciato bianco.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- Ring and body in white painted aluminum.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years



UGR <19

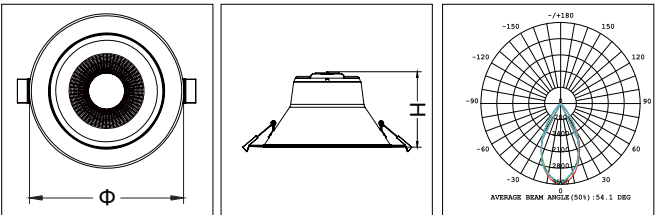

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
D2070-CM-TW	Bianco White	3000K 4000K 6000K	6W	200mA	455LM 490LM 490LM	>80Ra	Φ95x57mm	Φ68-80mm	0.28Kg
D2100-CM-TW	Bianco White	3000K 4000K 6000K	10W	350mA	800LM 880LM 880LM	>80Ra	Φ113x68.5mm	Φ90-102mm	0.28Kg
D2130-CM-TW	Bianco White	3000K 4000K 6000K	15W	700mA	1200LM 1320LM 1320LM	>80Ra	Φ145x81.8mm	Φ120-130mm	0.33Kg
D2150-CM-TW	Bianco White	3000K 4000K 6000K	20W	700mA	1640LM 1800LM 1800LM	>80Ra	Φ174x88.8mm	Φ145-155mm	0.47Kg
D2205-CM-TW	Bianco White	3000K 4000K 6000K	35W	900mA	2870LM 3150LM 3150LM	>80Ra	Φ232x112.8mm	Φ195-210mm	0.70Kg





LED DOWN LIGHTS



LED OD Downlight

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato dimmerabile triac.
 - Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
 - V-0 classification.
 - Integrated triac dimmable driver.
 - Warranty: 3 years

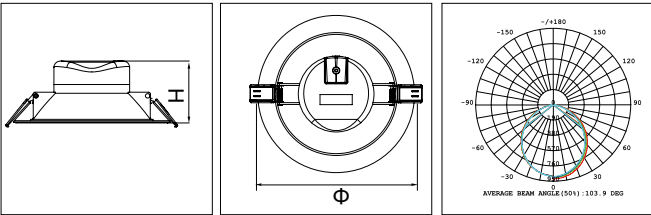

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
OD10T	Bianco White	3000K	10W	930LM	>80Ra	Φ113xH58.6mm	Φ90-102mm	0.20Kg
		4000K		1000LM				
		6000K		1000LM				
OD14T	Bianco White	3000K	14W	1300LM	>80Ra	Φ145xH65.8mm	Φ120-130mm	0.30Kg
		4000K		1400LM				
		6000K		1400LM				
OD17T	Bianco White	3000K	17W	1580LM	>80Ra	Φ174xH68.5mm	Φ145-155mm	0.40Kg
		4000K		1700LM				
		6000K		1700LM				
OD25T	Bianco White	3000K	25W	2400LM	>80Ra	Φ244xH84.5mm	Φ195-210mm	0.65Kg
		4000K		2600LM				
		6000K		2600LM				



ODF Series



Chrome Cover Changeable

OD-3CCT Series



Chrome Cover Changeable



3000K




4000K



6000K


- OD10S CHROME RING FOR ODF10/OD10T
- OD14S CHROME RING FOR ODF14/OD14T
- OD17S CHROME RING FOR ODF17/OD17T
- OD25S CHROME RING FOR ODF25/OD25T

LED DOWN LIGHTS

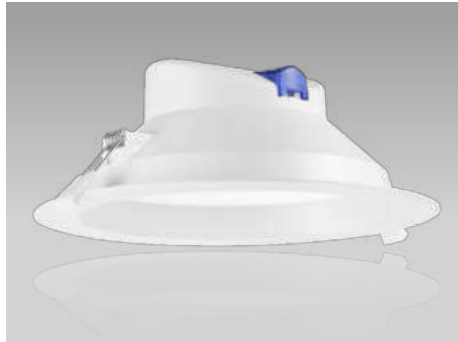

LED ODF Downlight

- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato.
 - Garanzia: 3 anni
- Corpo in alluminio rivestito in plastica termo-conduttiva.
 - Classificazione V-0.
 - Driver integrato.
 - Garanzia: 3 anni

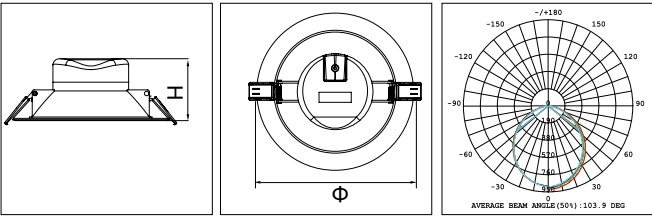


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
ODF10-WW	Bianco White	3000K	10W	910LM	>80Ra	Φ113xH72.5mm	Φ90-102mm	0.20Kg
ODF10-NW		4000K	10W	980LM	>80Ra	Φ113xH72.5mm	Φ90-102mm	
ODF14-WW	Bianco White	3000K	14W	1270LM	>80Ra	Φ145xH75mm	Φ120-130mm	0.30Kg
ODF14-NW		4000K	14W	1370LM	>80Ra	Φ145xH75mm	Φ120-130mm	
ODF17-WW	Bianco White	3000K	17W	1550LM	>80Ra	Φ174xH78.5mm	Φ145-155mm	0.40Kg
ODF17-NW		4000K	17W	1670LM	>80Ra	Φ174xH78.5mm	Φ145-155mm	
ODF25-WW	Bianco White	3000K	25W	2350LM	>80Ra	Φ244xH94.5mm	Φ195-210mm	0.65Kg
ODF25-NW		4000K	25W	2550LM	>80Ra	Φ244xH94.5mm	Φ195-210mm	



LED Cyclone Downlight

- Anello e corpo in alluminio verniciato bianco.
 - Driver esterno ON / OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- Ring and body in white painted aluminum.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years

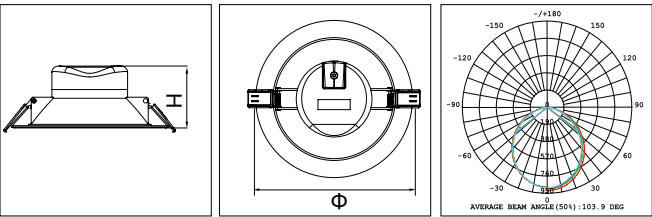

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
ODF40-WW	Bianco White	3000K	40W	1050mA	3600LM	>80Ra	Φ279xH94mm	Φ240-255mm	1.00Kg
ODF40-NW		4000K	40W	1050mA	3880LM	>80Ra	Φ279xH94mm	Φ240-255mm	





Adjustable spring



- ✓ Super aluminum
- ✓ Brand driver
- ✓ Imported LED source
- ✓ Precise light control
- ✓ Top process
- ✓ Authorized certification
- ✓ Efficient and energy saving
- ✓ Soft light to protect eyes
- ✓ Bright and uniform
- ✓ Durable in use



Multi-option for cover shape and cover color

Drop glass version


LED DOWN LIGHTS



LED Cristal Downlight

- Body color: black
- Replaceable: black/white/silver
- Energy class: A+
- Warranty: 3 years

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
LD386R-WW	Bianco White	3000K	29W	2450LM	>80Ra	Φ195xH78mm	Φ170mm	1.00Kg
LD386R-NW		4000K	29W	2600LM	>80Ra	Φ195xH78mm	Φ170mm	
LD388R-WW	Bianco White	3000K	38W	3200LM	>80Ra	Φ230xH86mm	Φ230mm	1.40Kg
LD388R-NW		4000K	38W	3400LM	>80Ra	Φ230xH86mm	Φ230mm	

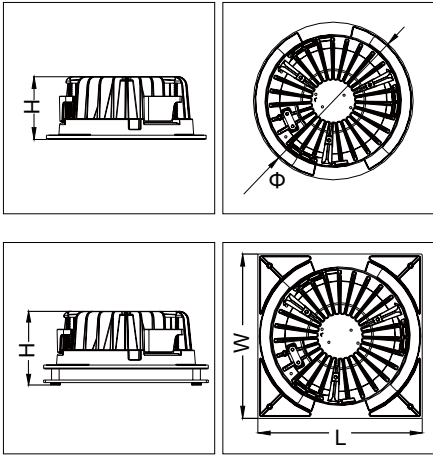


LED Cristal Downlight

- Body color: black
- Replaceable: black/white/silver
- Energy class: A+
- Warranty: 3 years



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
LD486R-WW	Bianco White	3000K	30W	2530LM	>90Ra	Φ195xH78mm	Φ170mm	1.00Kg
LD486R-NW		4000K	30W	2680LM	>90Ra	Φ195xH78mm	Φ170mm	
LD488R-WW	Bianco White	3000K	40W	3380LM	>90Ra	Φ230xH86mm	Φ200mm	1.30Kg
LD488R-NW		4000K	40W	3580LM	>90Ra	Φ230xH86mm	Φ200mm	

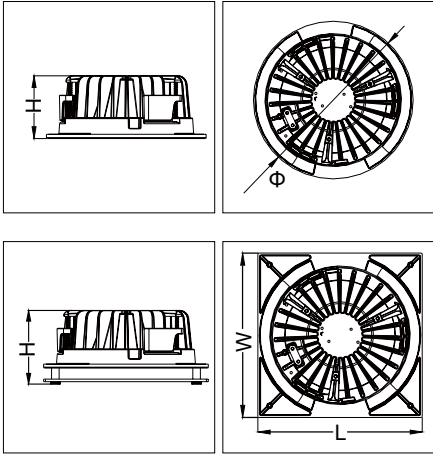

LED DOWN LIGHTS

Ghiere in opzione / Optional Cover



LDx86S White square ring 195x195mm
Ghiera quadratta bianca 195x195mm



LDx88S White square ring 230x230mm
Ghiera quadratta bianca 230x230mm

Drop glass version



LDx86G Glass round ring ø195mm
Ghiera rotonda in vetro ø195mm

Drop glass version



LDx88G Glass round ring ø230mm
Ghiera rotonda in vetro ø230mm

Drop glass version



LDx86SG Glass square ring 195x195mm
Ghiera quadratta in vetro 195x195mm

Drop glass version




LDx88SG Glass square ring 230x230mm
Ghiera quadratta in vetro 230x230mm






Led Scoop Shop Downlight

- Anello in alluminio verniciato bianco.
 - Dissipatore in alluminio verniciato bianco.
 - LED COB ad alta efficienza e alta resa cromatica CRI>90.
 - Gruppo ottico orientabile di 340° e basculante di 45°.
 - Riflettore con ottica speculare sfaccettata.
 - Installazione e regolazione semplice.
 - Driver esterno ON / OFF incluso.
 - Per opzione: Driver dimmerabile, kit emergenza.
 - Garanzia: 3 anni
- White painted aluminum ring.
 - White painted aluminum heatsink.
 - COB LED with high efficiency and high color rendering CRI> 90.
 - Optical unit 340 ° adjustable and 45° tilting.
 - Reflector with faceted specular optic.
 - Simple installation and adjustment.
 - External ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Warranty: 3 years

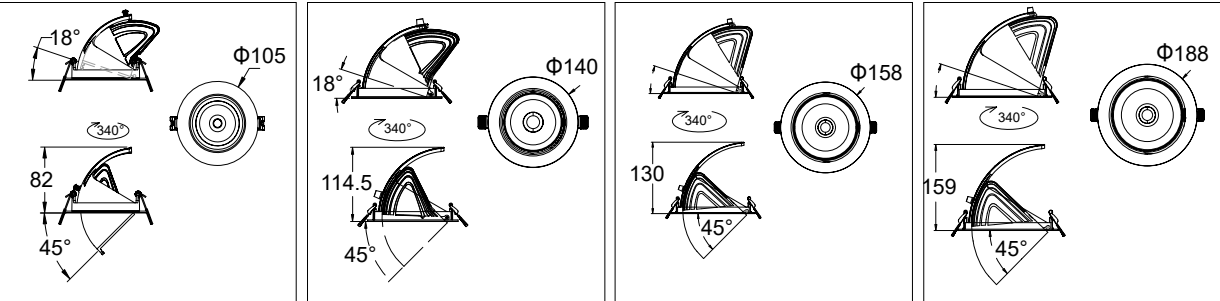

LD90 LD125 LD145 LD170

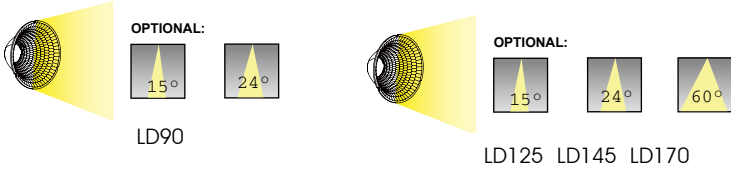

CRI > 90

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Foro Cutcut	Net Weight
LD90K3-38	Bianco White	3000K	15W	1280LM	Φ105mm	Φ90mm	0.30Kg
LD90K4-38		4000K	15W	1315LM	Φ105mm	Φ90mm	
LD125K3-40	Bianco White	3000K	28W	2000LM	Φ140mm	Φ125mm	0.90Kg
LD125K4-40		4000K	28W	2100LM	Φ140mm	Φ125mm	
LD145K3-40	Bianco White	3000K	38W	2400LM	Φ158mm	Φ140mm	1.00Kg
LD145K4-40		4000K	38W	2600LM	Φ158mm	Φ140mm	
LD170K3-40	Bianco White	3000K	40W	2960LM	Φ188mm	Φ170mm	1.40Kg
LD170K4-40		4000K	40W	3100LM	Φ188mm	Φ170mm	

220V
240V
50/60Hz

CE


RoHS

Indoor

IP20

L70 to 50000hrs




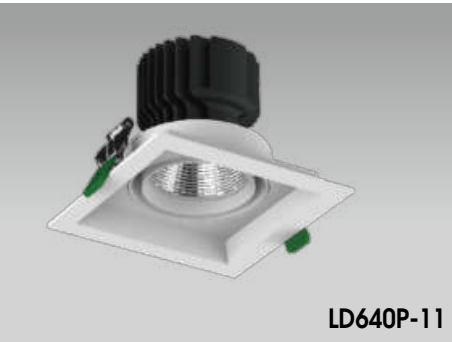

LD640P-11




LD640P-12

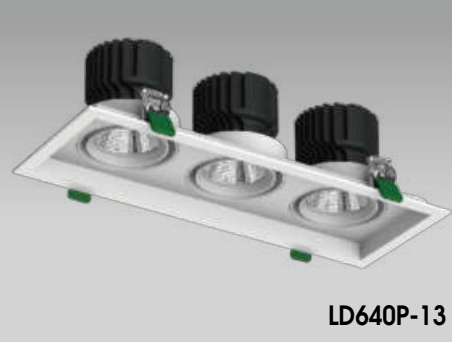



LD640P-13

LED Grille Downlight

- Cornice in alluminio verniciato bianco per 1/2/3 faretti.
- Dissipatore in alluminio verniciato nero.
- LED COB ad alta efficienza e alta resa cromatica CRI>90.
- Gruppo ottico orientabile di 340°e basculante di 30°.
- Riflettore con ottica speculare sfaccettata a 38°, per opzione 15/24/55°.
- Installazione e regolazione semplice.
- Driver esterno ON / OFF incluso.
- Per opzione: driver dimmerabile, kit emergenza.
- Garanzia: 3 anni
- White painted aluminum frame for 1/2/3 spotlights.
- Black painted aluminum heatsink.
- COB LED with high efficiency and high color rendering CRI> 90.
- Optical unit adjustable by 340 ° and tilting by 30 °.
- Reflector with 38 ° faceted specular optic, for option 15/24/55 °.
- Simple installation and adjustment.
- External ON / OFF driver included.
- For option: dimmable driver, emergency kit.
- Warranty: 3 years

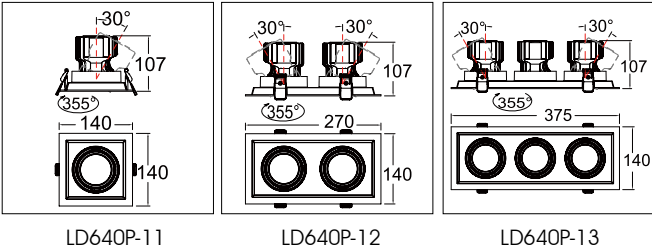

Global lens optics



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
LD640P-11-WW	Bianco White	3000K	24W	2200LM	>90Ra	L140x140xH107mm	125x125mm	0.58Kg
LD640P-11-NW		4000K	24W	2300LM	>90Ra	L140x140xH107mm	125x125mm	
LD640P-12-WW	Bianco White	3000K	2x24W	4400LM	>90Ra	L270x140xH107mm	255x125mm	1.17Kg
LD640P-12-NW		4000K	2x24W	4600LM	>90Ra	L270x140xH107mm	255x125mm	
LD640P-13-WW	Bianco White	3000K	3x24W	6600LM	>90Ra	L375x140xH107mm	360x125mm	1.60Kg
LD640P-13-NW		4000K	3x24W	6900LM	>90Ra	L375x140xH107mm	360x125mm	

LD640P-11-WW-N	Nero Black	3000K	24W	2200LM	>90Ra	L140x140xH107mm	125x125mm	0.58Kg
LD640P-11-NW-N		4000K	24W	2300LM	>90Ra	L140x140xH107mm	125x125mm	
LD640P-12-WW-N	Nero Black	3000K	2x24W	4400LM	>90Ra	L270x140xH107mm	255x125mm	1.17Kg
LD640P-12-NW-N		4000K	2x24W	4600LM	>90Ra	L270x140xH107mm	255x125mm	
LD640P-13-WW-N	Nero Black	3000K	3x24W	6600LM	>90Ra	L375x140xH107mm	360x125mm	1.60Kg
LD640P-13-NW-N		4000K	3x24W	6900LM	>90Ra	L375x140xH107mm	360x125mm	



MODULE

LB1001R-01

Bridgelux V8
200mA 34V 9W
880-930lm
Beam Angle:38°

LB1002R-01

Bridgelux V10B
350mA 34V 15W
1300-1400lm
Beam Angle:38°

BRIDGELUX

HOUSING KIT

LD1011R-01

Ø68*27mm
Hole Size Ø 60mm

LD1003R-01

Ø85*52mm
Hole Size Ø 75mm

LD1012R-01

Ø85*30mm
Hole Size Ø 75mm

LD1021R-01

Ø85*17mm
Hole Size Ø 75mm

LD1070R-01

Ø88*48mm
Hole Size Ø 75mm

LD1071R-01

Ø88*48mm
Hole Size Ø 75mm

LD1071R-03

Ø88*48mm
Hole Size Ø 75mm

LD1071S-03

88*88*48mm
Hole Size 75*75mm

LD1089R-01

Ø88*47mm
Hole Size Ø 75mm

MODULE

LB1005R-01

Bridgelux V13V
900mA 34V 38W (3400-3600lm)
1050mA 34V 42W (3750-4080lm)

BRIDGELUX

HOUSING KIT

LD1008R-01




Ø165*86mm
Hole Size Ø 150mm

LED CEILING LIGHTS



LED Ceiling Lights

- Corpo e schermo in PC.
- Driver incorporato no flickering.
- Installabile ad incasso o a plafone per opzione.
- Garanzia: 3 anni.
- PC body and screen.
- Built-in driver no flickering.
- Can be recessed or ceiling mounted for option.
- Warranty: 3 years



IK10 IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	Efficacy	CRI	Dimensioni Dimensions	Net Weight
C7022-A	Bianco White	2700K 3200K 4000K	15W	110mA	1650LM	110LM/W	>80Ra	220x220x50mm	0.30 Kg
C7028-A	Bianco White	2700K 3200K 4000K	18W	130mA	2160LM	120LM/W	>80Ra	280x280x50mm	0.40 Kg
C7033-A	Bianco White	2700K 3200K 4000K	24W	180mA	3000LM	125LM/W	>80Ra	330x330x50mm	0.70 Kg





LED CEILING LIGHTS



LED Ceiling Lights

- Corpo e schermo in PC.
- Driver incorporato no flickering.
- Installabile ad incasso o a plafone per opzione.
- Garanzia 3 anni.
- PC body and screen.
- Built-in driver no flickering.
- Can be recessed or ceiling mounted for option.
- Warranty: 3 years



IK10 IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	Efficacy	CRI	Dimensioni Dimensions	Net Weight
C7220-A	Bianco White	2700K 3200K 4000K	15W	110mA	1650LM	110LM/W	>80Ra	Φ220x50mm	0.30 Kg
C7280-A	Bianco White	2700K 3200K 4000K	18W	130mA	2160LM	120LM/W	>80Ra	Φ280x50mm	0.40 Kg
C7330-A	Bianco White	2700K 3200K 4000K	24W	180mA	3000LM	125LM/W	>80Ra	Φ330x50mm	0.70 Kg






LED CEILING LIGHTS



LED Rainbow Ceiling Lights

- Corpo in plastica termoconduttiva.
- Classificazione V-0.
- Schermo in PC.
- Driver incorporato no flickering.
- Installabile ad incasso o a plafone.
- Garanzia: 3 anni.
- Thermally conductive plastic body.
- V-0 classification.
- PC screen.Built-in driver no flickering.
- Can be recessed or ceiling mounted.
- Warranty: 3 years

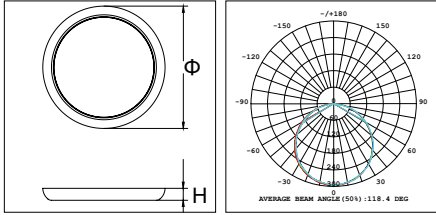

Codice Code	Finitura Finishing	CCT	Potenza Wattage	CCT / Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
CD0180-AM-TW-DP	Bianco White	3000K 4000K 6000K	8W	600LM 680LM 640LM	>80Ra	Φ180xH20.5mm	Φ80-160mm	0.30 Kg
		3000K 4000K 6000K	12W	840LM 960LM 900LM				
CD0220-AM-TW-DP	Bianco White	3000K 4000K 6000K	12W	1080LM 1200LM 1140LM	>80Ra	Φ220xH21.5mm	Φ120-200mm	0.40 Kg
		3000K 4000K 6000K	18W	1440LM 1710LM 1530LM				
CD0300-AM-TW-DP	Bianco White	3000K 4000K 6000K	18W	1710LM 1890LM 1800LM	>80Ra	Φ300xH25mm	Φ150-270mm	0.70 Kg
		3000K 4000K 6000K	25W	2125LM 2370LM 2250LM				






LED CEILING LIGHTS



LED Rainbow Ceiling Lights

- Corpo in plastica termoconduttiva.
- Classificazione V-0.
- Schermo in PC.
- Driver incorporato no flickering.
- Installabile ad incasso o a plafone.
- Garanzia: 3 anni.
- Thermally conductive plastic body.
- V-0 classification.
- PC screen.Built-in driver no flickering.
- Can be recessed or ceiling mounted.
- Warranty: 3 years

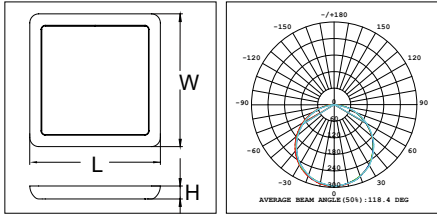





Codice Code	Finitura Finishing	CCT	Potenza Wattage	CCT / Lumen	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
CD1818-AM-TW-DP	Bianco White	3000K 4000K 6000K	8W	600LM 680LM 640LM	>80Ra	180x180xH20.5mm	Φ80-160mm	0.30 Kg
		3000K 4000K 6000K	12W	840LM 960LM 900LM				
CD2222-AM-TW-DP	Bianco White	3000K 4000K 6000K	12W	1080LM 1200LM 1140LM	>80Ra	220x220xH21.5mm	Φ120-200mm	0.40 Kg
		3000K 4000K 6000K	18W	1440LM 1710LM 1530LM				
CD3030-AM-TW-DP	Bianco White	3000K 4000K 6000K	18W	1710LM 1890LM 1800LM	>80Ra	300x300xH25mm	Φ180-270mm	0.70 Kg
		3000K 4000K 6000K	25W	2125LM 2370LM 2250LM				






LED 5 IN 1 Slim Ceiling Light

- Driver integrato, non flicker
 - 3000K / 4000K / 6000K selezionabili
 - Montaggio ad incasso ed a plafone
 - Non dimmerabile, funzione di emergenza non disponibile
 - Magnete incorporato per una facile sostituzione dell'anello
 - Garanzia: 3 anni
- Driver Built-in, integrated design, non flicker
 - 3000K/4000K/6000K selectable
 - For both recessed mounting and surface mounting
 - Non Dimmable, emergency function non available
 - Magnet built-in for easy ring changing
 - Warranty: 3 years

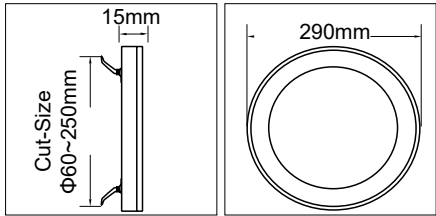


AR24W

Codice Code	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
AR6WCCT3	6W	100-110lm/W	>0.9	>80Ra	Φ139xH15mm	Φ55~100mm	0.20Kg
AR12WCCT3	12W				Φ164xH15mm	Φ55~125mm	0.30Kg
AR18WCCT3	18W				Φ217xH15mm	Φ55~175mm	0.40Kg
AR24WCCT3	24W				Φ290xH15mm	Φ60~250mm	0.70Kg
AR6W/CR	Chrome ring match with 5 in 1 led panel AR6WCCT3 LED Panel					Φ139xH15mm	
AR6W/SILVER	Silver ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR6W/BR	Brushed Bronze ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR6W/GOLD	Brushed Gold ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR6W/BK	Matt Black ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR12W/CR	Chrome ring match with 5 in 1 led panel AR6WCCT3 LED Panel					Φ164xH15mm	
AR12W/SILVER	Silver ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR12W/BR	Brushed Bronze ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR12W/GOLD	Brushed Gold ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR12W/BK	Matt Black ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR18W/CR	Chrome ring match with 5 in 1 led panel AR6WCCT3 LED Panel					Φ217xH15mm	
AR18W/SILVER	Silver ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR18W/BR	Brushed Bronze ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR18W/GOLD	Brushed Gold ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR18W/BK	Matt Black ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR24W/CR	Chrome ring match with 5 in 1 led panel AR6WCCT3 LED Panel					Φ290xH15mm	
AR24W/SILVER	Silver ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR24W/BR	Brushed Bronze ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR24W/GOLD	Brushed Gold ring match with 5 in 1 led panel AR6WCCT3 LED Panel						
AR24W/BK	Matt Black ring match with 5 in 1 led panel AR6WCCT3 LED Panel						






Colorful Ring Easy to Remove and Change

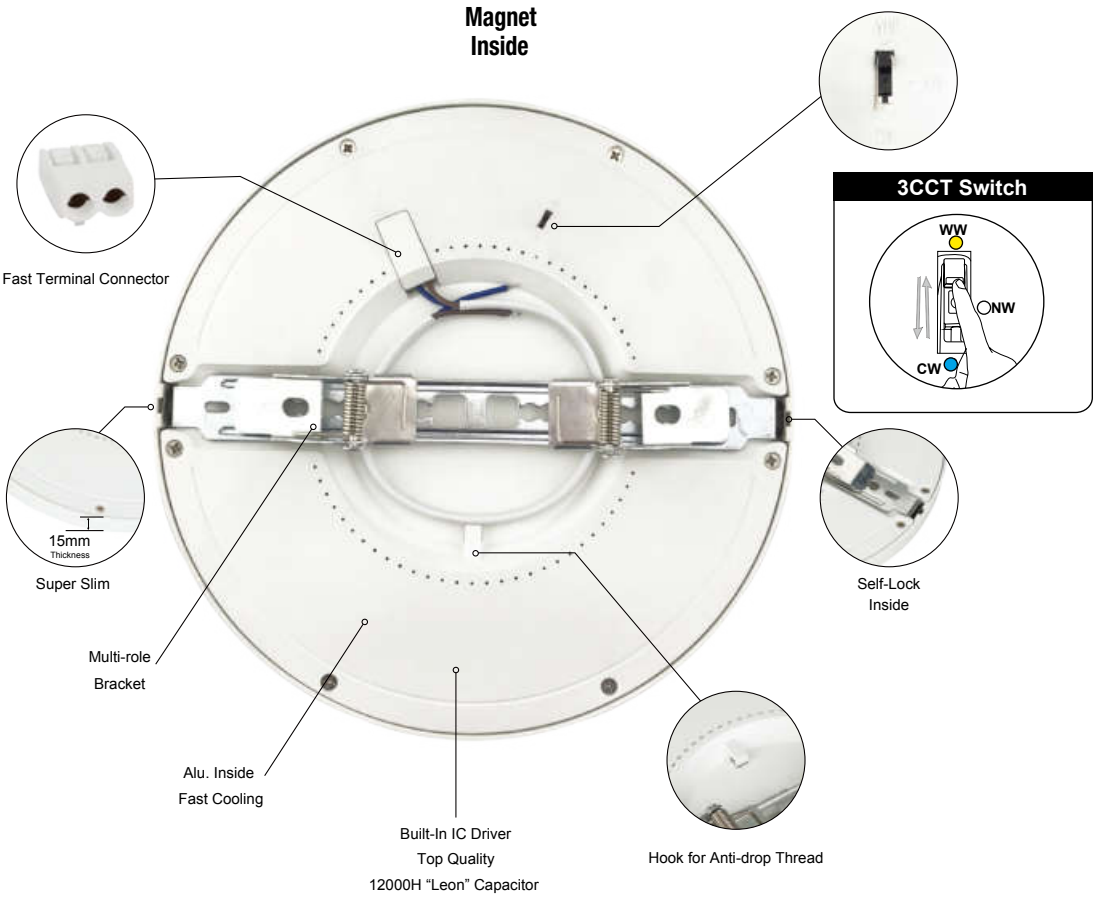



Mirage

- Corpo in metallo con verniciatura a forno, finitura lucida.
 - Installazione semplice.
 - Lunghezza del cavo regolabile.
 - Assenza di sfarfallio.
 - Garanzia: 2 anni
- Metal body with oven painted, glossy finish
 - Simple installation.
 - Adjustable cable length.
 - Absence of flicker.
 - Warranty: 2 years



○ Bianco
White

● Nero
Black

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	Efficacy	CRI	Dimensioni Dimensions	Net Weight
PDR09250A	Bianco White	2700K	15W	350mA	1050LM	70LM/W	>80Ra	Φ250x110xΦ160mm	1 Kg
PDR09400A		3200K	30W	700mA	2050LM	70LM/W	>80Ra	Φ400x130xΦ160mm	
		4000K							
PDR09250B	Nero Black	2700K	15W	350mA	1050LM	70LM/W	>80Ra	Φ250x110xΦ160mm	1 Kg
PDR09400B		3200K	30W	700mA	2050LM	70LM/W	>80Ra	Φ400x130xΦ160mm	
		4000K							

220V
240V
50/60Hz

120°




L70 to 25000hrs





Blossom 3.5"

- Corpo in alluminio rivestito in plastica termo-conduttiva.
- Cilindro/parallelepipedo esterno in PC.
- Classificazione V-2
- Riflettore lucido sfaccettato, orientabile e basculante fino a 30°.
- Ottica 24 o 36° per opzione.
- Driver integrato.
- Installazione a plafone senza viti a vista.
- Garanzia: 3 anni
- Aluminum body covered in thermo-conductive plastic.
- External cylinder / parallelepiped in PC.
- V-2 classification.
- Glossy faceted reflector, adjustable and tilting up to 30°.
- Optics 24 or 36° for option.
- Integrated driver.
- Ceiling-mounted installation without visible screws.
- Warranty: 3 years




Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	Efficacy	CRI	Dimensioni Dimensions	Net Weight
D12090-A	Bianco White	2700K	10W	130mA	920LM	92LM/W	>80Ra	Φ110x111mm	0.30 Kg
		3200K							
		4000K							
D12090-B	Bianco White	2700K	10W	130mA	920LM	92LM/W	>80Ra	104x104x111mm	0.30 Kg
		3200K							
		4000K							






LED MIRROR-FRONT LIGHTS

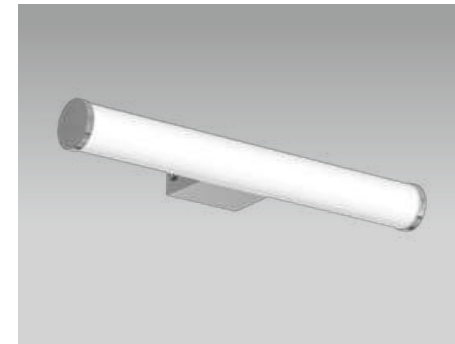

Kama

- Schermo diffusore in PC.
- Attacco a parete e testate di chiusura cromate.
- Distribuzione morbida e uniforme.
- Garanzia: 2 anni
- PC diffuser.
- Wall attachment and chromed end caps.
- Soft and uniform distribution.
- Warranty: 2 years




CRI > 90

IK08

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	Efficacy	CRI	Dimensioni Dimensions	Net Weight
ML002-AM	Bianco White	3000K	8W	105mA	800LM	100LM/W	>90Ra	Φ45x400x96mm	1 Kg



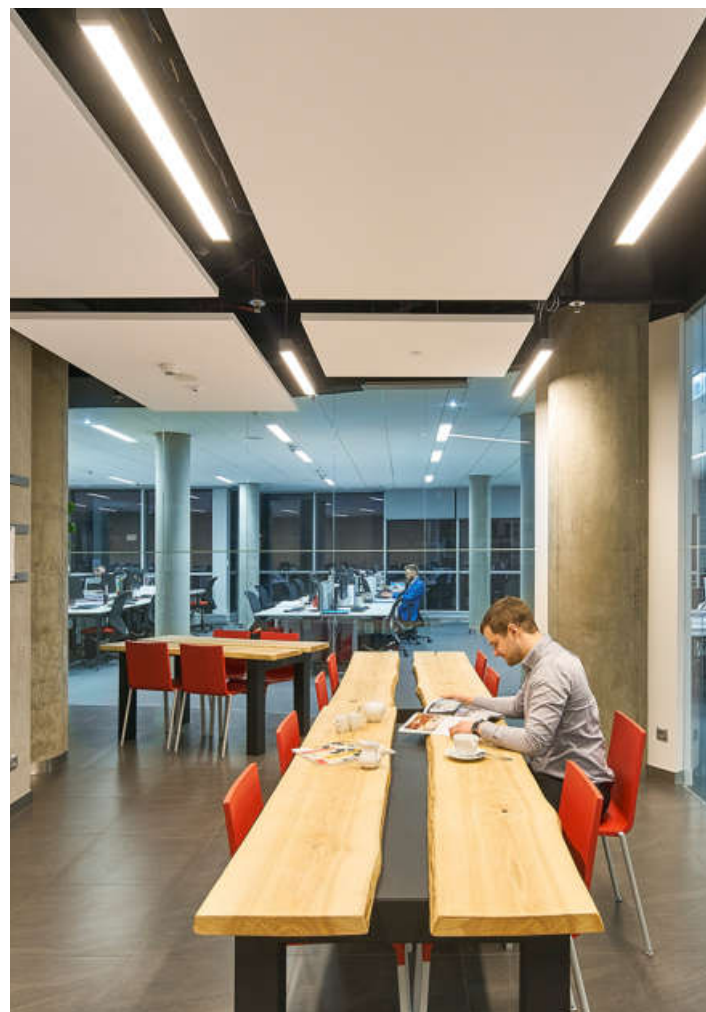

LED Linear Light

■ PRESTAZIONI / PERFORMANCE

Elementi lineari dalle linee sobrie ed eleganti, ideali per essere utilizzati sia come lampada singola che come sistema componibile.

Realizzati in alluminio naturale.

Emissione luminosa diretta o diretta/indiretta con diffusori opali o schermo lamellare cromato.

Disponibili ampie gamme di accessori per la composizione e l'installazione dei prodotti.


Linear elements with sober and elegant lines, ideal to be used both as a single lamp and as a modular system.

Made of natural aluminum.


Direct or direct / indirect light emission with opal diffusers or chromed lamellar screen.

Wide ranges of accessories available for the composition and installation of products.

LED LINEAR LIGHT FASHION SERIES

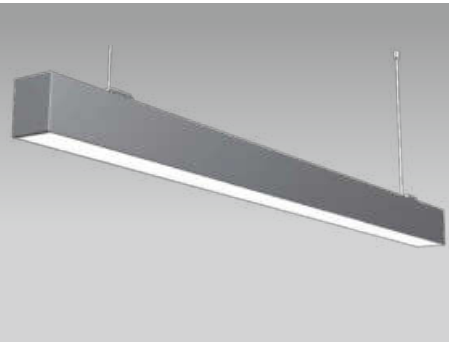


- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Diffusore in PC opale.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps. Diffuser in opal PC.
- Built-in isolated driver. Already prepared for pass-through wiring.
- Accessories for suspension, ceiling attachment, internal linear joint available.
- Warranty: 5 years

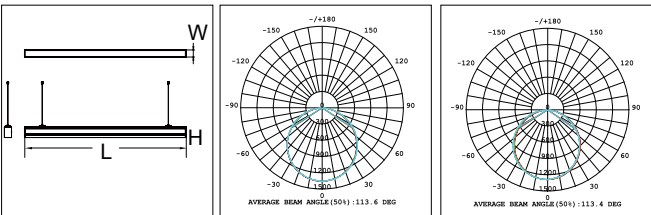


100+ lm/W


Codice Code	Finitura Finishing	CCT	Potenza Wattle	Lumen	Dimensioni Dimensions	Net Weight
L0601-AS WW	Argento Silver	3000K	20W	2000LM	L610x64xH77mm	1.10Kg
L0601-AS NW		4000K	20W	2150LM	L610x64xH77mm	
L1201-AS WW	Argento Silver	3000K	40W	4000LM	L1220x64xH77mm	2.00Kg
L1201-AS NW		4000K	40W	430LM	L1220x64xH77mm	

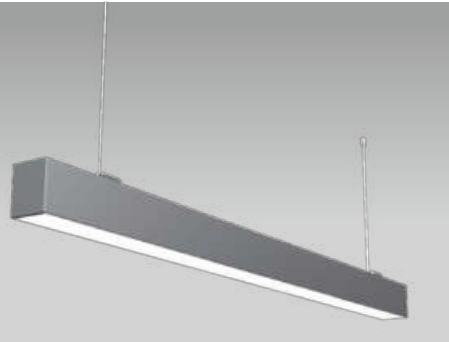

- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Doppia emissione 70% verso il basso e 30% verso l'alto.
- Diffusori in PC opale.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare, giunti esterni per composizioni a 2,3,4 vie.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps.
- Double emission 70% downwards and 30% upwards.
- Diffusers in opal PC.
- Built-in isolated driver.
- Already prepared for pass-through wiring.
- Available accessories for suspension, ceiling attachment, internal linear joint, external joints for 2,3,4-way compositions.
- Warranty: 5 years



30% UP
70% DOWN

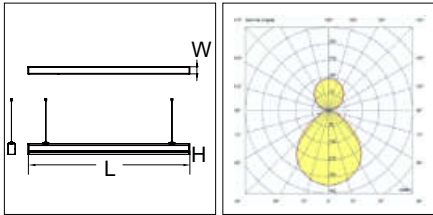


100+ lm/W


Codice Code	Finitura Finishing	CCT	Potenza Wattle	Lumen	CRI	Dimensioni Dimensions	Net Weight
L1203-DA-TW	Argento Silver	3000K	48W	4460LM	>80Ra	L1130xW50xH76mm	1.90Kg
		4000K		4800LM			
		6000K		4800LM			




LED LINEAR LIGHT LEGO SERIES

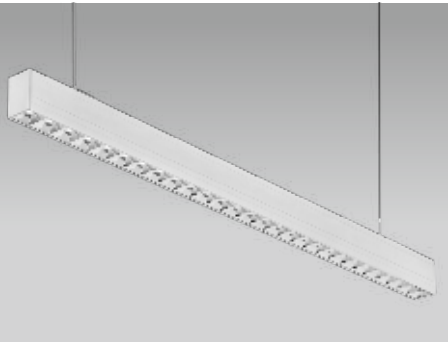

- Corpo in alluminio non verniciato, testate di chiusura in PC.
- Doppia emissione 70% verso il basso e 30% verso l'alto.
- Diffusori superiore in PC opale.
- Schermo inferiore lamellare cromato dark light.
- Driver isolato incorporato.
- Già predisposto per il cablaggio passante.
- Disponibili accessori per la sospensione, attacco a soffitto, giunto interno lineare, giunti esterni per composizioni a 2,3,4 vie.
- Garanzia: 5 anni
- Unpainted aluminum body, PC end caps.
- Double emission 70% downwards and 30% upwards.
- Upper diffusers in opal PC.
- Dark light chromed lamellar lower screen.
- Built-in isolated driver.
- Already prepared for pass-through wiring.
- Available accessories for suspension, ceiling attachment, internal linear joint, external joints for 2,3,4-way compositions.
- Warranty: 5 years



30% UP
70% DOWN

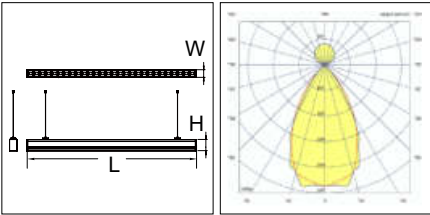

165
96

UGR <16

100+ lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattle	Lumen	CRI	Dimensioni Dimensions	Net Weight
L1203-DR-TW	Argento Silver	3000K	48W	4900LM	>80Ra	L1130xW50xH76mm	1.90Kg
		4000K		5280LM			
		6000K		5280LM			




LED TRI-PROOF LIGHT SERIES



- Corpo stampato ad iniezione, in policarbonato autoestinguente di colore grigio, di elevata resistenza meccanica.
 - Riflettore in acciaio zincato, verniciato bianco con doppia pista di LED.
 - Diffusore stampato ad iniezione in policarbonato opale autoestinguente V2, finitura esterna liscia.
 - Connettore rapido maschio/femmina per il collegamento alla linea di alimentazione.
 - Fattore di potenza > 0.9.
 - Versione in emergenza disponibile.
 - Garanzia: 2 anni
- Injection molded body in self-extinguishing gray polycarbonate with high mechanical resistance.
 - Reflector in galvanized steel, painted white with double LED track.
 - Injection molded diffuser in self-extinguishing V2 opal polycarbonate, smooth external finish.
 - Male / female quick connector for connection to the power supply line.
 - Power factor> 0.9.
 - Emergency version available.
 - Warranty: 2 years

IP65

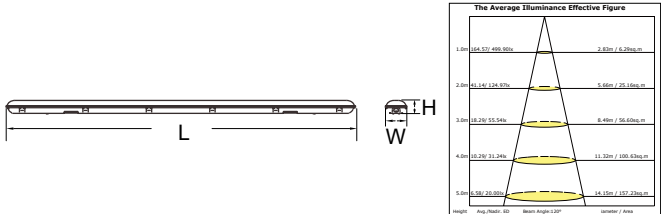


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
TRP-120A-NW	Grigio Chiaro Light Grey	4000K	40W	3600LM	>80Ra	>0.9	1210x75x65mm	1.80Kg
TRP-150A-NW		4000K	50W	4600LM	>80Ra	>0.9	1510x75x65mm	

WITH EMERGENCY **EMERGENCY**

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
TRP-120A-NW-E (EMERGENCY)	Grigio Chiaro Light Grey	4000K	40W	3600LM	>80Ra	>0.9	1210x75x65mm	2.40Kg
TRP-150A-NW-E (EMERGENCY)		4000K	50W	4600LM	>80Ra	>0.9	1510x75x65mm	





LED TRI-PROOF LIGHT SERIES

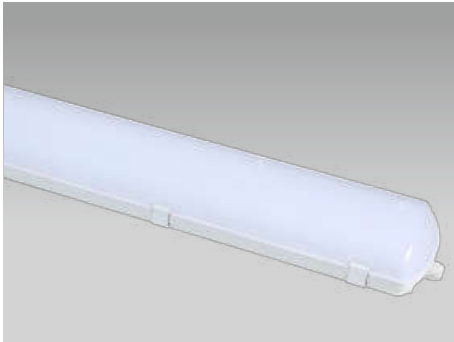

- Corpo stampato ad iniezione, in policarbonato autoestinguente di colore grigio, di elevata resistenza meccanica.
 - Riflettore in acciaio zincato, verniciato bianco con doppia pista di LED.
 - Diffusore stampato ad iniezione in policarbonato opale autoestinguente V2, finitura esterna liscia.
 - Connettore rapido maschio/femmina per il collegamento alla linea di alimentazione.
 - Fattore di potenza > 0.9.
 - Versione in emergenza disponibile.
 - Garanzia: 3 anni
- Injection molded body in self-extinguishing gray polycarbonate with high mechanical resistance.
 - Reflector in galvanized steel, painted white with double LED track.
 - Injection molded diffuser in self-extinguishing V2 opal polycarbonate, smooth external finish.
 - Male / female quick connector for connection to the power supply line.
 - Power factor> 0.9.
 - Emergency version available.
 - Warranty: 3 years

IK08

IP65

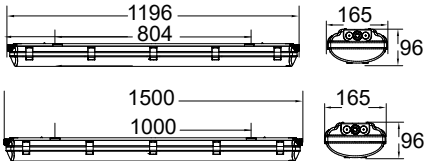

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
TRP-120B	Grigio Chiaro Light Grey	3000K	55W	8000LM	>80Ra	>0.9	1196x165x96mm	3.0Kg
		4000K						
		6000K						
TRP-150B	Grigio Chiaro Light Grey	3000K	70W	10000LM	>80Ra	>0.9	1196x165x96mm	3.0Kg
		4000K						
		6000K						

WITH EMERGENCY **EMERGENCY**

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
TRP-120B-E (EMERGENCY)	Grigio Chiaro Light Grey	3000K	55W	590LM	>80Ra	>0.9	1196x165x96mm	1.80Kg
		4000K						
		6000K						
TRP-150B-E (EMERGENCY)	Grigio Chiaro Light Grey	3000K	70W	590LM	>80Ra	>0.9	1196x165x96mm	1.80Kg
		4000K						
		6000K						



LED Panel Lights

■ PRESTAZIONI / PERFORMANCE

Progettati per l'illuminazione di uffici, hotel, sale meeting, ambienti con video terminali e in generale per tutti gli ambienti che necessitano di un'illuminazione omogenea e costante nel tempo.

Una soluzione semplice per disporre della tecnologia più aggiornata in tema di illuminazione d'interni.

Cura nell'assemblaggio (giunzione dei profili assolutamente invisibile), omogeneità di luminanza dei diffusori, ottima resa luminosa, resa cromatica eccellente, uniformità di colore dei lotti di fornitura anche a distanza nel tempo, fanno di questa serie un prodotto eccellente.

La gamma copre tutte le necessità dimensionali e una completa serie di accessori ne consentono l'utilizzo in ogni tipo di installazione.

Designed for the lighting of offices, hotels, meeting rooms, environments with video terminals and in general for all environments that require homogeneous and constant lighting over time.

A simple solution to have the most up-to-date technology in interior lighting. Care in assembly (junction of the profiles absolutely invisible), homogeneity of luminance of the diffusers, excellent light output, excellent color rendering, color uniformity of the supply batches even at a distance over time, make this series an excellent product.

The range covers all dimensional needs and a complete series of accessories allow it to be used in any type of installation.




LED PANEL LIGHT




LED ROUND PANEL LIGHT

- Doppia emissione 70% verso il basso e 30% verso il basso.
 - Cornice in alluminio verniciata bianca, nessuno spazio di giunzione.
 - Kit sospensione incluso.
 - Driver ON/OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Schermo microprismatizzato per un eccellente controllo della luce.
 - Garanzia: 3 anni
- Double emission 70% downwards and 30% downwards.
 - White painted aluminum frame, no joint space.
 - Suspension kit included.
 - ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - Micro prismatic screen for excellent light control.
 - Warranty: 3 years

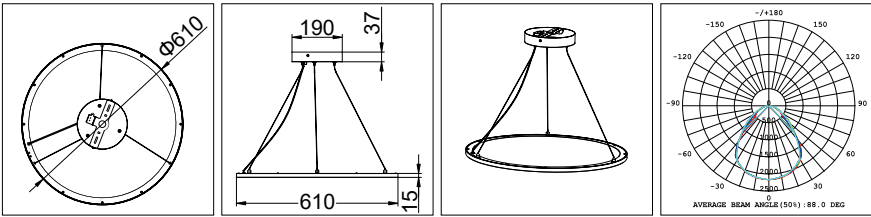

UGR <19 100+ lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P0610-DTMH-WW	Bianco White	3000K	50W	1050mA	5000LM	>80Ra	Ø610x15mm	4.20kg
P0610-DTMH-NW		4000K	50W	1050mA	5400LM	>80Ra	Ø610x15mm	

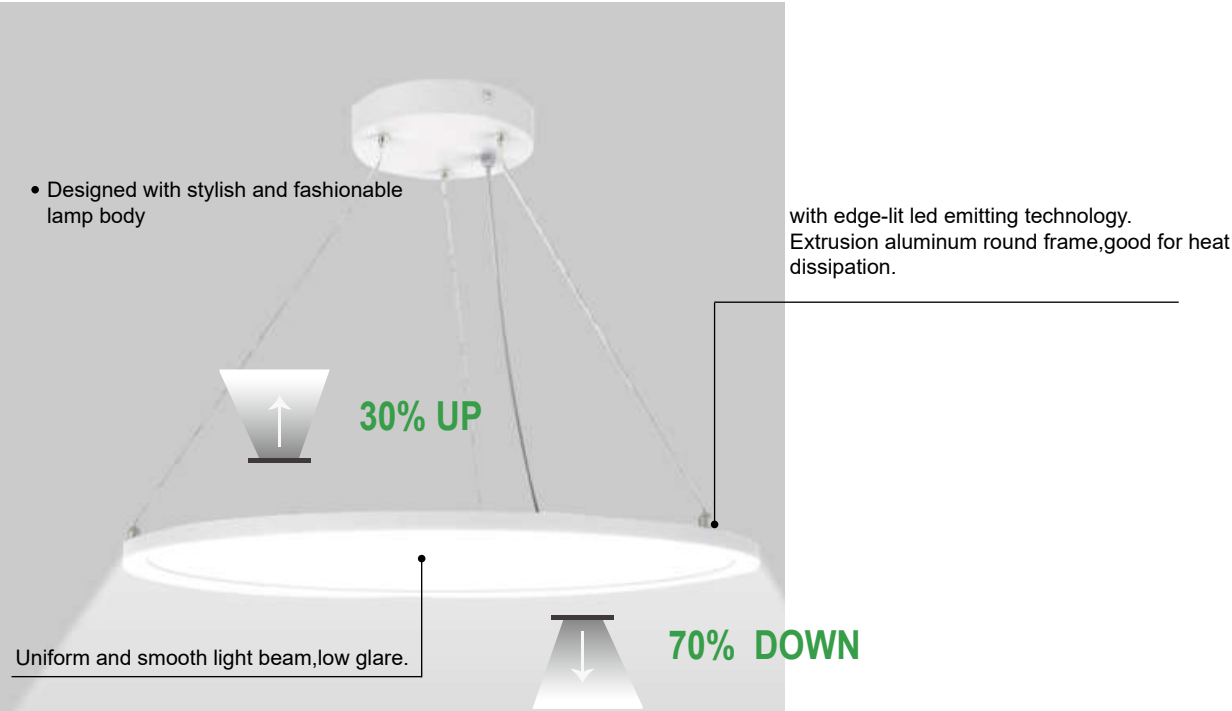


LED PANEL LIGHT



LED SWAN PANEL LIGHT (BACKLIT)

- Cornice in alluminio verniciata bianca, nessuno spazio di giunzione.
 - Driver ON/OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Schermo in PC con distribuzione diffondente.
 - Garanzia: 3 anni
- White painted aluminum frame, no joint space.
 - ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - PC screen with wide distribution.
 - Warranty: 3 years



90+lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P6060BL-WW-40	Bianco White	3000K	40W	950mA	3350LM	>80Ra	595x595x33mm	2.20kg
P6060BL-NW-40		4000K	40W	950mA	3600LM	>80Ra	595x595x33mm	

Schermo microprismatizzato per un eccellente controllo della luce.
Micro prismatic screen for excellent light control.


UGR <19 CRI >90 100+ lm/W IP54

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P6060BLHU-WW-40	Bianco White	3000K	40W	1000mA	3800LM	>90Ra	595x595x33mm	2.20kg
P6060BLHU-NW-40		4000K	40W	1000mA	4000LM	>90Ra	595x595x33mm	
P3120BLHU-WW-40	Bianco White	3000K	40W	1000mA	3800LM	>90Ra	295x1195x33mm	2.50kg
P3120BLHU-NW-40		4000K	40W	1000mA	4000LM	>90Ra	295x1195x33mm	

* IP54 front side / frpmale
IP40 back side / retro



LED PANEL LIGHT

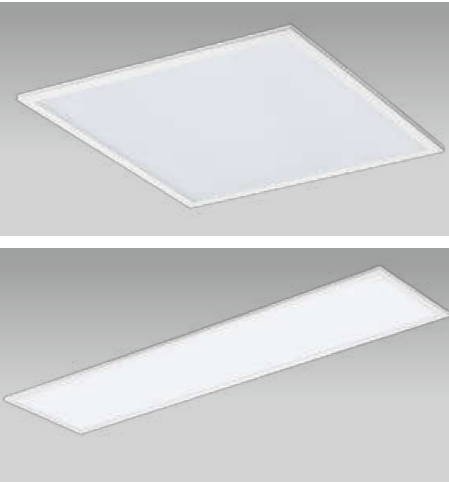

LED SWAN PANEL LIGHT (EDGE LIT)

- Cornice in alluminio verniciata bianca, nessuno spazio di giunzione.
 - Driver ON/OFF incluso.
 - Per opzione: driver dimmerabile, kit emergenza.
 - Schermo in PC con distribuzione diffondente.
 - Garanzia: 3 anni
- White painted aluminum frame, no joint space.
 - ON / OFF driver included.
 - For option: dimmable driver, emergency kit.
 - PC screen with wide distribution.
 - Warranty: 3 years

220V
240V

50/60Hz

110°

85+lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P3030-WW	Bianco White	3000K	12W	700mA	900LM	>80Ra	295x295x10mm	1.00kg
P3030-NW		4000K	12W	700mA	960LM	>80Ra	295x295x10mm	
P3060-WW	Bianco White	3000K	18W	700mA	1520LM	>80Ra	295x595x10mm	1.30kg
P3060-NW		4000K	18W	700mA	1620LM	>80Ra	295x595x10mm	

100+ lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P6060H-WW-40	Bianco White	3000K	40W	1050mA	3720LM	>80Ra	595x595x10mm	2.56kg
P6060H-NW-40		4000K	40W	1050mA	4000LM	>80Ra	595x595x10mm	
P3120H-WW	Bianco White	3000K	40W	1050mA	3640LM	>80Ra	295x1195x10mm	2.58kg
P3120H-NW		4000K	40W	1050mA	3920LM	>80Ra	295x1195x10mm	
P6120-WW	Bianco White	3000K	48W	1050mA	4470LM	>80Ra	595x1195x10mm	6.00kg
P6120-NW		4000K	48W	1050mA	4800LM	>80Ra	595x1195x10mm	

UGR <19

100+ lm/W

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Corrente Current	Lumen	CRI	Dimensioni Dimensions	Net Weight
P6060HU-WW-40	Bianco White	3000K	40W	1050mA	3720LM	>80Ra	595x595x10mm	2.56kg
P6060HU-NW-40		4000K	40W	1050mA	4000LM	>80Ra	595x595x10mm	
P3120HU-WW	Bianco White	3000K	40W	1050mA	3720LM	>80Ra	295x1195x10mm	2.58kg
P3120HU-NW		4000K	40W	1050mA	4000LM	>80Ra	295x1195x10mm	



LED PANEL LIGHT
Accessories

kit montaggio a sospensione

Kit montaggio da incasso

Kit montaggio da incasso


kit montaggio a plafone

kit emergenza

alimentatore dimmerabile

kit montaggio a plafone



Material composition

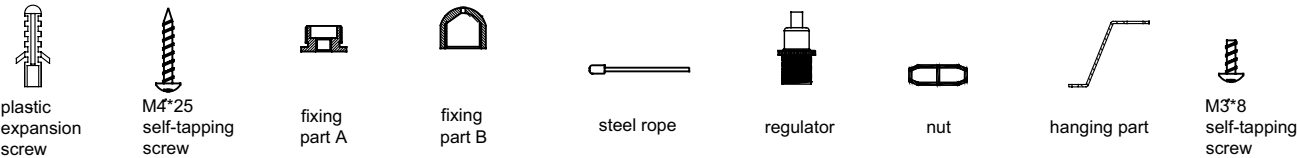


Product Type									
For 300*1200&600*1200	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	12PCS
For 300*600&600*600	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	8 PCS

Installation

- ① Remove M3*6 screws of these positions
- ② Fix the hanging parts with M3*8 screws
- ③ Install as below diagram

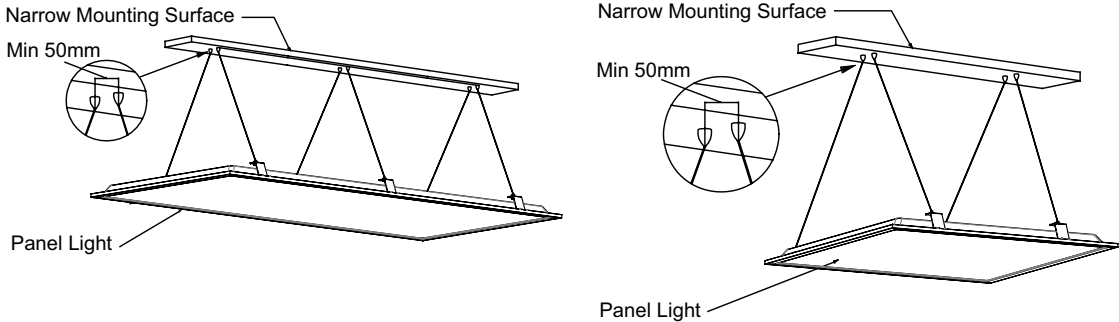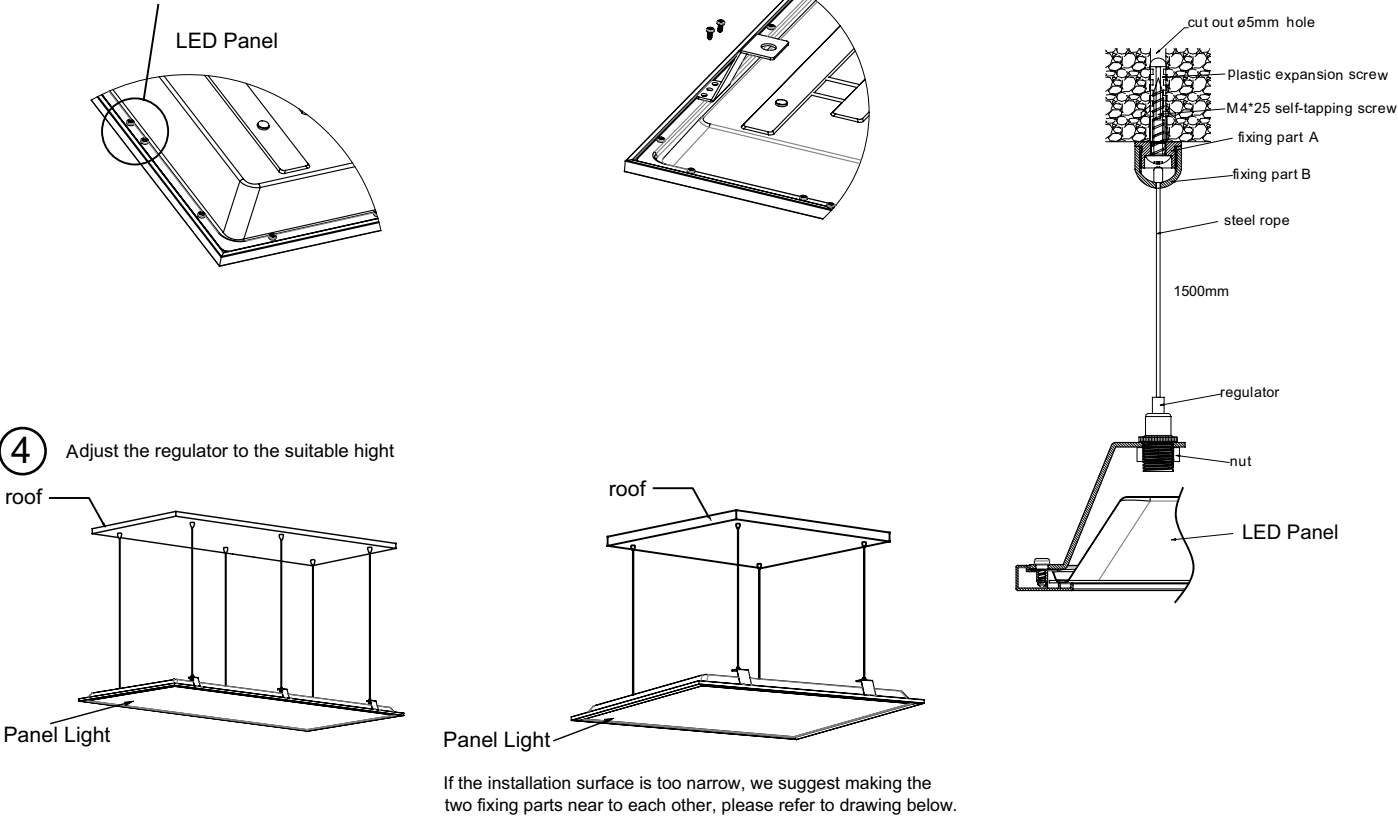



Material composition

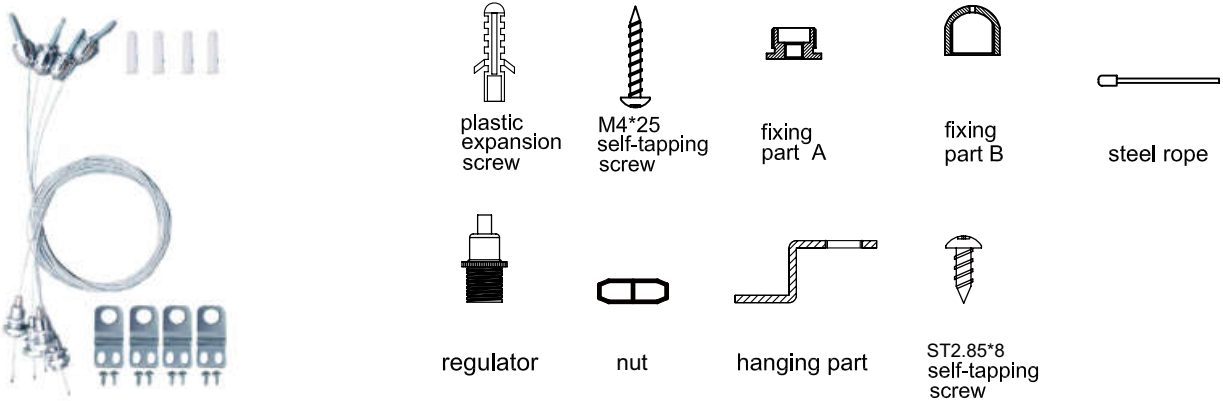

Product Type									
PKIT1	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	8 PCS
PKIT2	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	12 PCS

Installation

- ① Remove the screws of these positions
- ② Fix the hanging parts with M3*8.5 screws
- ③ Install as below diagram

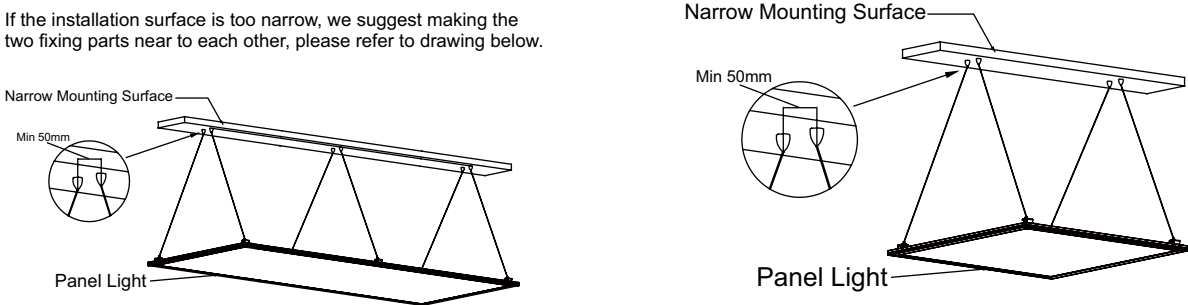
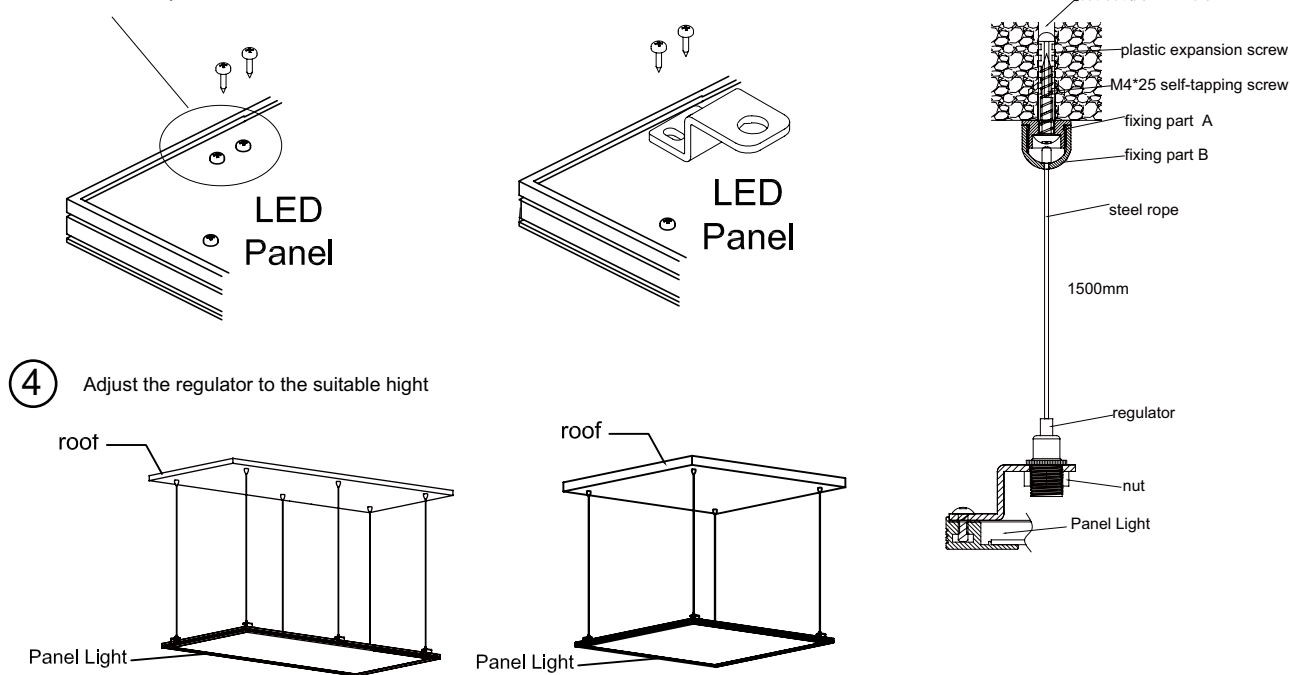


Material composition

Spring Hanger		
FOR 300*600/600*600/620*620	4 PCS	8 PCS
FOR 300*1200/600*1200	6 PCS	12 PCS




Installation

- ① Remove the original screws of this positions
- ② Fix the I shaper bracket with M3*6 self-tapping screws




- ③ Stretch the four spring hangers and insert onto the backside of roof



- ④ Completed

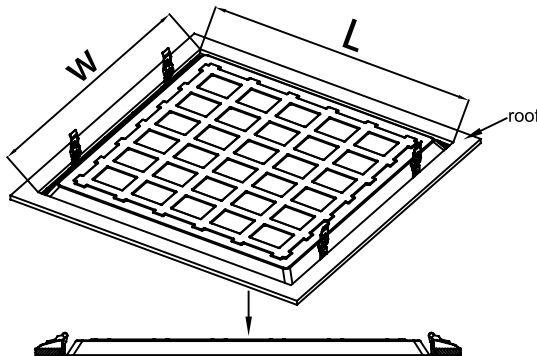

SIZE OF PANEL (MM)	L*W(MM) MOUNTING DIMENSIONS
295*595	275*575
595*595	575*575
620*620	575*575
295*1195	275*1175
595*1195	575*1175



Material composition

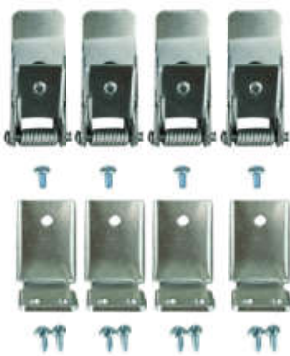

x4 pcs	x4 pcs	x8 pcs	x4pcs
			
L shape Bracket	Spring Hanger	M3*8.5 screw	M3*6.5 screw




Installation

- ① Remove the original screws of this positions
- ② Fix the L shaper bracket with M3*8.5 self-tapping screws




- ③ Connect the L shape Bracket and Spring hanger by M3*6.5 screw

- ④ Stretch the four spring hangers and insert onto the backside of roof



- ⑤ Completed

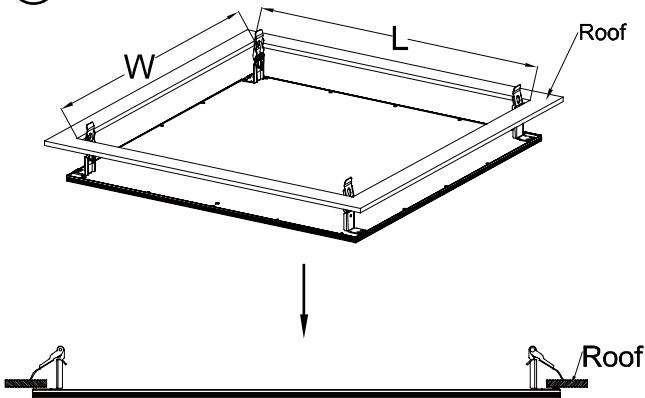

size of panel (mm)	L*W(mm) Mounting Dimensions
595*595	567*567
620*620	592*592
295*295	267*267
295*595	267*567

① screw driver corner brace X 4 PCS M4x5 Screw X 16 PCS corner brace M4 screw 4 corners

② Minimum space height 100mm Gypsum top CUTOUT panel light

Product Type	man-made skeleton cutout size(mm)
PKITIC66	605*605

③ panel light power supply connect wire and put it beside the cut out hole CUTOUT

④ screw driver Fixture X4 PCS Nut X4 PCS M4*10 Screw X4 PCS Nut Screw Fixtures Gypsum top man-made skeleton

⑤ Nut Screw Fixtures Gypsum top man-made skeleton Panel Light

Material composition

x4 pcs plastic expansion screw x4 pcs M4*25 self-tapping screw x4 pcs lifting device

x4 pcs hanging part x8 pcs M3*8.5 screw x4pcs M3*10 screw

Installation

① Remove the screws of these positions

② fix the hanging parts with M3*8.5 screws self-tapping screws

③ LED Panel

size of panel (mm)	L*W(mm) Mounting Dimensions
600X600	510x500
620X620	566*525
300X300	241*200
300X600	541*200

④ LED Panel

⑤ LED Panel

⑥ LED Panel

⑦ LED Panel

⑧ LED Panel

⑨ LED Panel

⑩ LED Panel

⑪ LED Panel

⑫ LED Panel

⑬ LED Panel

⑭ LED Panel

⑮ LED Panel

⑯ LED Panel

⑰ LED Panel

⑱ LED Panel

⑲ LED Panel

⑳ LED Panel

㉑ LED Panel

㉒ LED Panel

㉓ LED Panel

㉔ LED Panel

㉕ LED Panel

㉖ LED Panel

㉗ LED Panel

㉘ LED Panel

㉙ LED Panel

㉚ LED Panel

㉛ LED Panel

㉜ LED Panel

㉝ LED Panel

㉞ LED Panel

㉟ LED Panel

㊱ LED Panel

㊲ LED Panel

㊳ LED Panel

㊴ LED Panel

㊵ LED Panel

㊶ LED Panel

㊷ LED Panel

㊸ LED Panel

㊹ LED Panel

㊺ LED Panel

㊻ LED Panel


㊼ LED Panel

㊽ LED Panel


㊾ LED Panel

㊿ LED Panel

Material composition

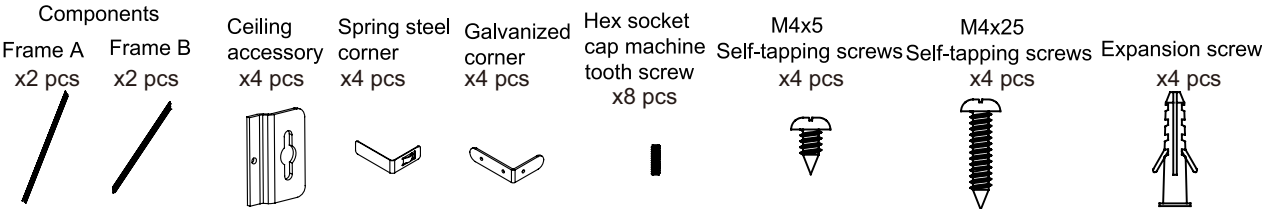


Assemble the frames according to the following illustration

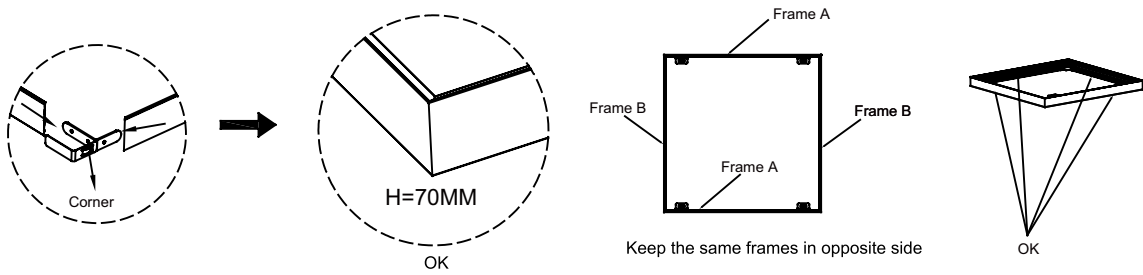


Mark position details as below

Item No.	Panel dim(mm)	L*W(mm)
PKIT4BL	595*595	455*554
PKIT5BL	295*595	1065*245

Altezza cornice:70mm
Frame height: 70mm

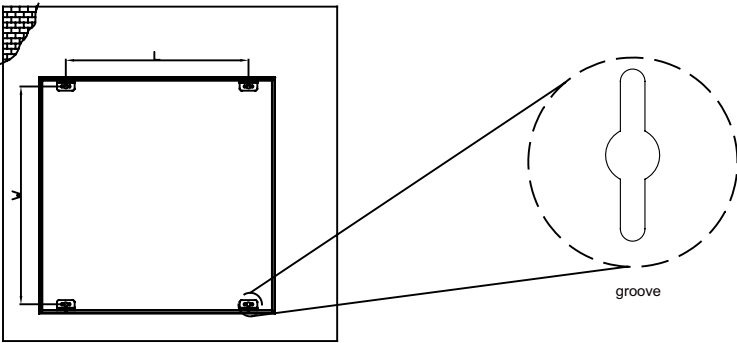


Installation

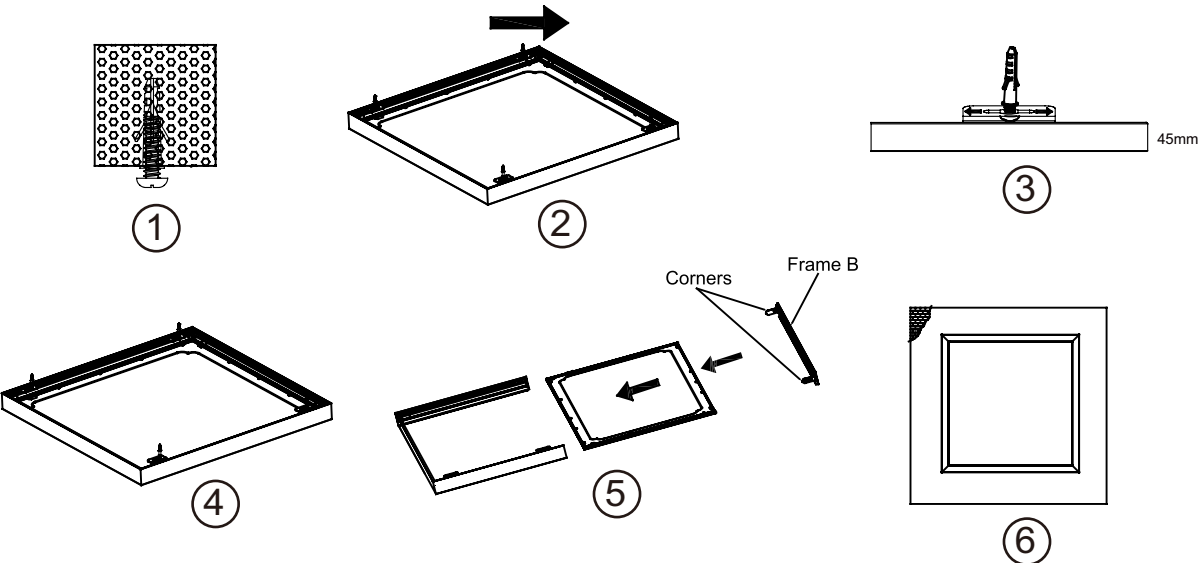


- ① Drill 4 holes at marking position with expansion screws and self-tapping screws(not screw too tight).
- ② Install the assembled frame on the roof.
- ③ Move and fix the ceiling frame (left to right, or right to left) through groove.
- ④ Tighten M4x25 self-tapping screws.
- ⑤ Open the frame B on one side, insert the panel into the frame, then seal the frame.
- ⑥ Installation finished.

Material composition

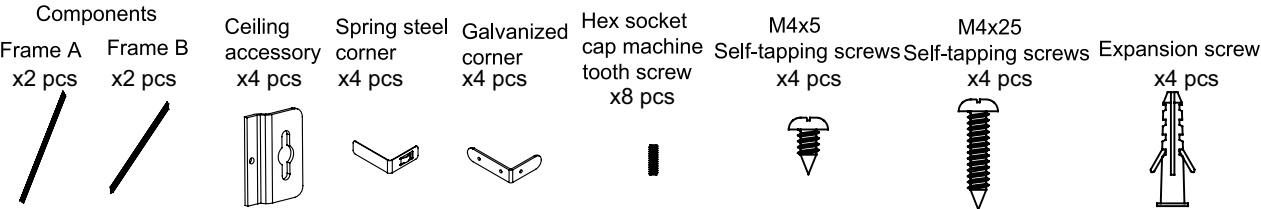


Assemble the frames according to the following illustration

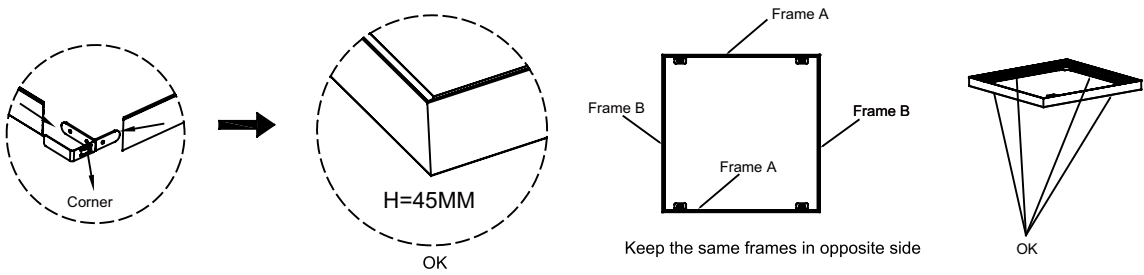


Mark position details as below

Item No.	Panel dim(mm)	L*W(mm)
PKIT612	595*1195	1065*554
PKIT5	295*1195	1065*254
PKIT4	595*595	465*554
PKIT36	295*595	465*254
PKIT33	295*295	165*254

Altezza cornice:45mm
Frame height: 45mm

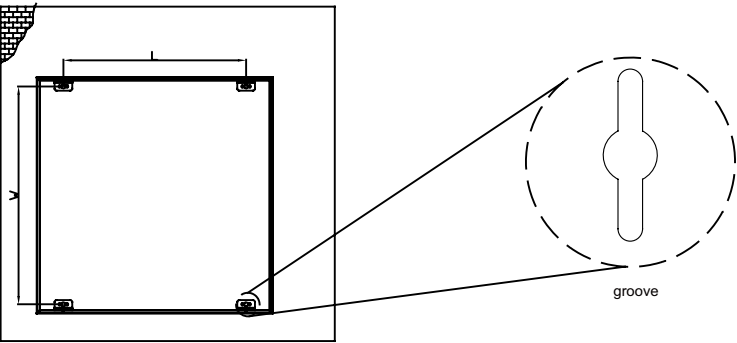

Installation

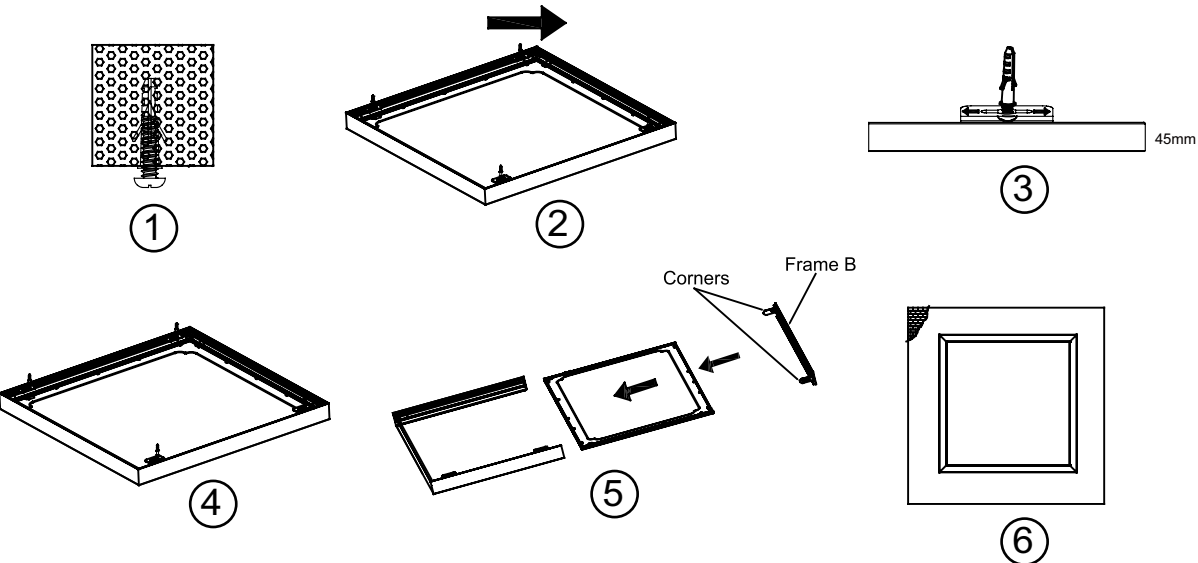

- ① Drill 4 holes at marking position with expansion screws and self-tapping screws(not screw too tight).
- ② Install the assembled frame on the roof.
- ③ Move and fix the ceiling frame (left to right, or right to left) through groove.
- ④ Tighten M4x25 self-tapping screws.
- ⑤ Open the frame B on one side, insert the panel into the frame, then seal the frame.
- ⑥ Installation finished.

LED Track Lights

■ PRESTAZIONI / PERFORMANCE

Spot a binario trifase dal design semplice e moderno.
Dimensioni contenute, driver integrato.
Grazie alla gamma delle potenze disponibili e alla completa serie di ottiche, risulta ideale per tutte le applicazioni nell'illuminazione direzionale.

Three-phase track spot with a simple and modern design.
Small size, integrated driver.
Thanks to the range of powers available and the complete series of optics, it is ideal for all applications in directional lighting.

■ CARATTERISTICHE / FEATURES

- | | | |
|------------------------|---|---------------------|
| Assenza di Mercurio | • | Mercury-free lamps |
| CRI>90 | • | CRI> 90 |
| Accensione immediata. | • | Immediate ignition. |
| Assenza di sfarfallio. | • | Absence of flicker. |





Sistema Combo

La pulizia delle forme si unisce ad una completa gamma di corpi illuminanti con svariate distribuzioni luminose atte a coprire una moltitudine soluzioni illuminotecniche nell'ambito della illuminazione architettonica.

Il sistema COMBO si basa sull'utilizzo di un binario elettrificato a bassa tensione, disponibile nelle versioni da incasso / incasso con bordo nascosto / sospensione e plafone.

Al suo interno si possono inserire apparecchi lineari di lunghezza da 12cm sino a 1200cm con distribuzione luminosa diffondente oppure con apertura 25° o 40°, e potenze che vanno dai 6W sino ai 40W.

The clean lines are combined with a complete range of lighting bodies with various light distributions designed to cover a multitude of lighting solutions in the field of architectural lighting.

The COMBO system is based on the use of a low voltage electrified track, available in the recessed / recessed versions with hidden edge / suspension and ceiling.

Inside you can insert linear luminaires with a length from 12cm up to 1200cm with a diffused light distribution or with an opening of 25 ° or 40 °, and powers ranging from 6W up to 40W.



È altresì possibile utilizzare apparecchi orientabili sia lineari che a spot con potenze dai 6W ai 20W con distribuzione 25° o 40°

It is also possible to use both linear and spot adjustable luminaires with powers from 6W to 20W with 25 ° or 40 ° distribution.



A completamento della gamma anche l'impiego di uno spot a sospensione consente di integrare COMBO in ogni situazione che necessita di soluzioni estetiche o illuminotecniche complesse.

To complete the range, the use of a suspended spot also allows COMBO to be integrated in any situation that requires complex aesthetic or lighting solutions.




Tutti gli apparecchi utilizzano LED di ultima generazione con alta resa cromatica CRI > 90 nelle temperature di colore di 2700K o 4000K. Particolare attenzione è stata posta nello studio delle ottiche per garantire un elevato confort visivo e distribuzione luminosa ottimizzata.

All the luminaires use the latest generation LEDs with high color rendering CRI> 90 in color temperatures of 2700K or 4000K. Particular attention was paid to the study of the optics to ensure high visual comfort and optimized light distribution.



Combo-Folding Grille

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
- Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
- Warranty: 3 years



1196


CRI > 90

Flicker free

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
TS03R06T-S	Nero Black	2700K	6W	420LM	>90Ra	112x23x108.5mm	0.8Kg
TS03R06T-WW		3000K					
TS03R06T-NW		4000K					




TS03R12T-S	Nero Black	2700K	12W	840LM	>90Ra	220x23x108.5mm	1.5Kg
TS03R12T-WW		3000K					
TS03R12T-NW		4000K					



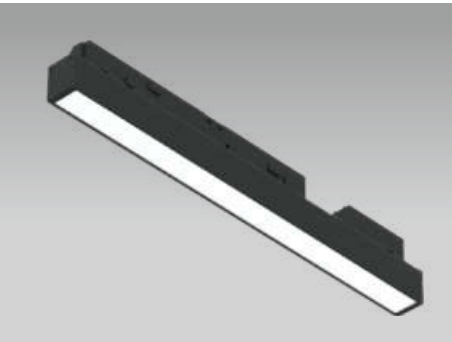


Combo-LINEAR

- Alloggiamento in metallo, buona dissipazione del calore.
 - Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza.
 - Garanzia: 3 anni
- Metal housing, good heat dissipation.
 - Double restraint system, mechanical and magnetic, for maximum safety.
 - Warranty: 3 years

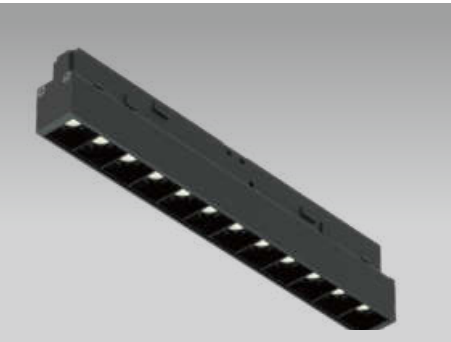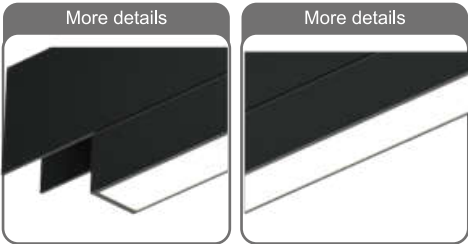

Combo-Grille

- Alloggiamento in metallo, buona dissipazione del calore.
 - L'adsorbimento magnetico e il gancio meccanico realizzano una doppia sicurezza.
 - Soddisfare la tendenza dell'assenza di illuminazione principale sul mercato.
 - Senza sfarfallio.
 - Garanzia: 5 anni.
 - L70 a 55000 ore.
- Metal housing, good heat dissipation.
 - Magnetic adsorption and mechanical hook realize double safety.
 - Cater to the trend of no main lighting in the market.
 - Non-flickering.
 - Warranty: 5 years.
 - L70 to 55000hrs.



CRI > 90 Flicker free

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
TS03L300-S	Nero Black	2700K	10W	850LM	>90Ra	300x22x43mm	0.6Kg
TS03L300-WW		3000K					
TS03L300-NW		4000K					
TS03L600-S	Nero Black	2700K	20W	1700LM	>90Ra	600x22x43mm	1.0Kg
TS03L600-WW		3000K					
TS03L600-NW		4000K					
TS03L1200-S	Nero Black	2700K	40W	3400LM	>90Ra	1200x22x43mm	1.4Kg
TS03L1200-WW		3000K					
TS03L1200-NW		4000K					



UGR <12 CRI > 90 Flicker free


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
TS03L06T-S	Nero Black	2700K	6W	480LM	>90Ra	114x22x43mm	0.6Kg
TS03L06T-WW		3000K					
TS03L06T-NW		4000K					
TS03L12T-S	Nero Black	2700K	12W	980LM	>90Ra	222x22x43mm	1.0Kg
TS03L12T-WW		3000K					
TS03L12T-NW		4000K					
TS03L18T-S	Nero Black	2700K	18W	1440LM	>90Ra	330x22x43mm	1.4Kg
TS03L18T-WW		3000K					
TS03L18T-NW		4000K					





Combo-Spotlight

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza.
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety.
 - Warranty: 3 years




CRI > 90 Flicker free

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
TS03S35-S	Nero Black	2700K	6W	540LM	>90Ra	Φ35x80x40mm	0.3Kg
TS03S35-WW		3000K					
TS03S35-NW		4000K					
TS03S45-S	Nero Black	2700K	10W	900LM	>90Ra	Φ45x100x40mm	0.45Kg
TS03S45-WW		3000K					
TS03S45-NW		4000K					
TS03S55-S	Nero Black	2700K	15W	1500LM	>90Ra	Φ55x120x40mm	0.6Kg
TS03S55-WW		3000K					
TS03S55-NW		4000K					
TS03S65-S	Nero Black	2700K	20W	2000LM	>90Ra	Φ60x140x40mm	0.8Kg
TS03S65-WW		3000K					
TS03S65-NW		4000K					



Combo-Suspension

- Doppio sistema di ritenuta, meccanico e magnetico, per la massima sicurezza
 - Garanzia: 3 anni
- Double restraint system, mechanical and magnetic, for maximum safety
 - Warranty: 3 years





UGR <19 CRI > 90 Flicker free


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
TS03P01-S	Nero Black	2700K	12W	540LM	>90Ra	Φ40x297mm	0.3Kg
TS03P01-WW		3000K					
TS03P01-NW		4000K					



Internal Accessories for Combo Spotlights

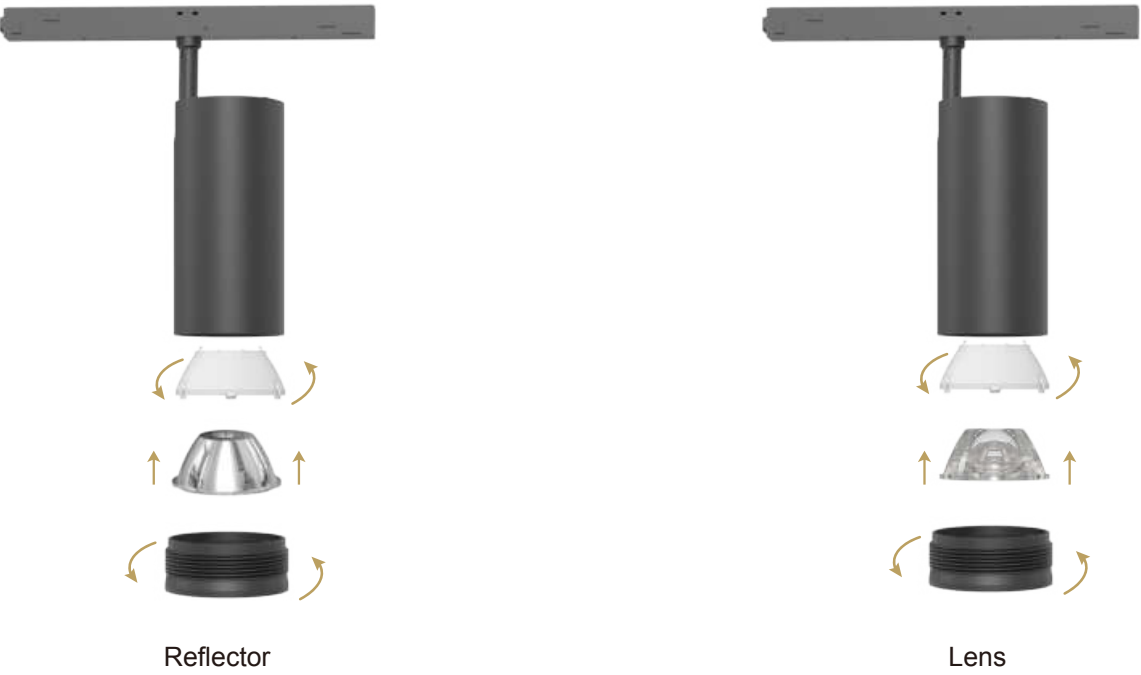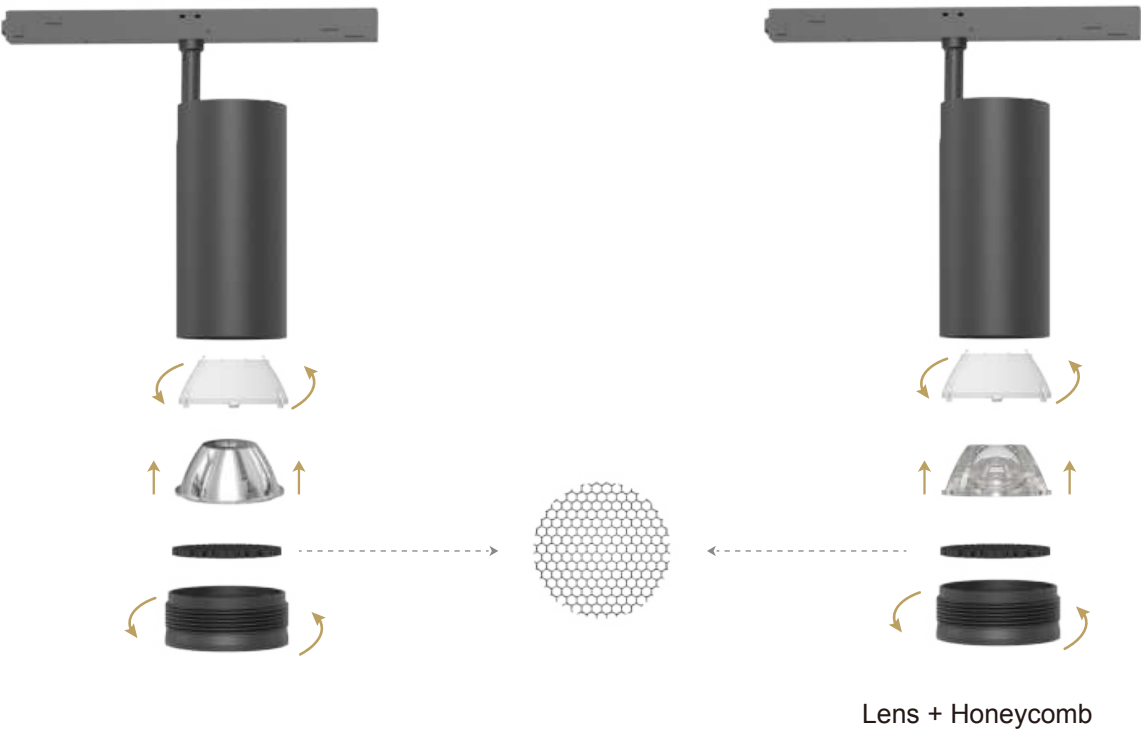

Track

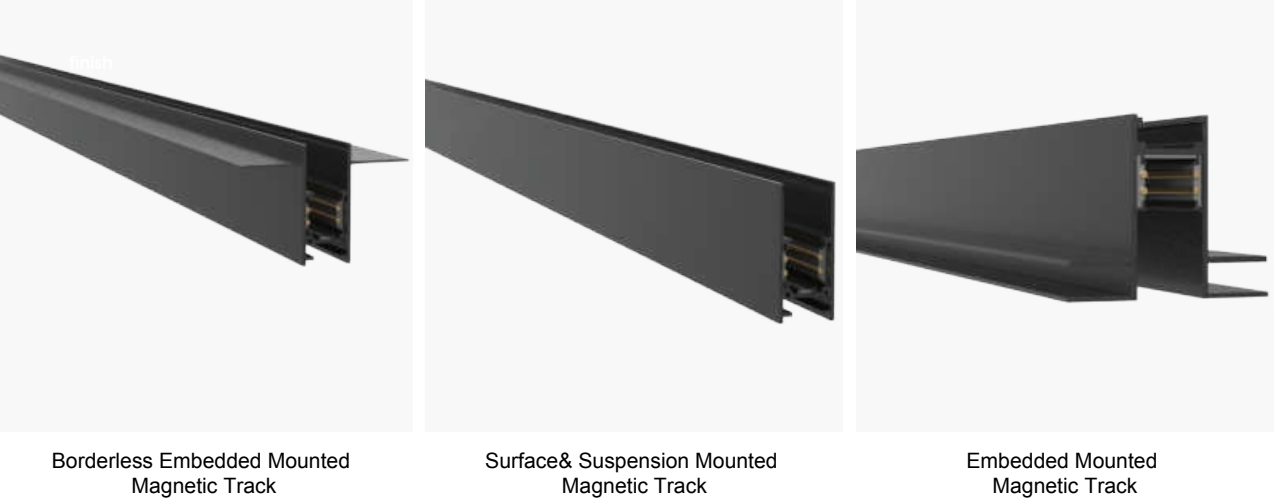




Accessory





- Corpo in alluminio, verniciato a forno.
- Attacco standard trifase, adatto a vari binari.
- Driver integrato senza sfarfallio.
- Ottica sfaccettata.
- Facile da installare e da regolare.
- Ottica standard 38°, 15°/24°/55°/ per opzione.
- Garanzia: 3 anni

- Aluminum body, oven painted.
- Standard three-phase connection, suitable for various tracks.
- Integrated driver without flicker.
- Faceted optics.
- Easy to install and adjust.
- Standard optics 38°, 15° / 24° / 55° / for option.
- Warranty: 3 years

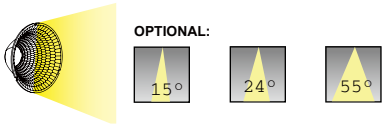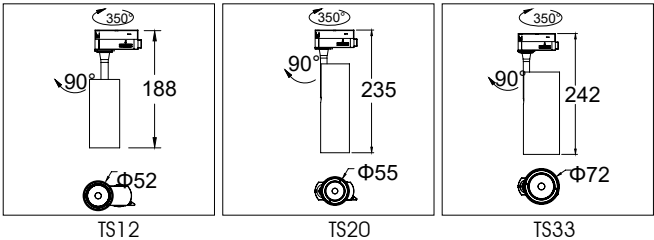

CRI > 90 Flicker free

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
TS12K3-38	Bianco White	3000K	12W	860LM	Φ52xH188mm	0.50Kg
TS12K4-38		4000K	12W	977LM	Φ52xH188mm	
TS20K3-38	Bianco White	3000K	20W	1545LM	Φ55xH235mm	0.70Kg
TS20K4-38		4000K	20W	1807LM	Φ55xH235mm	
TS33K3-38	Bianco White	3000K	33W	2420LM	Φ72xH242mm	0.90Kg
TS33K4-38		4000K	33W	2805LM	Φ72xH242mm	

TSN12K3-38	Nero Black	3000K	12W	860LM	Φ52xH188mm	0.50Kg
TSN12K4-38		4000K	12W	977LM	Φ52xH188mm	
TSN20K3-38	Nero Black	3000K	20W	1545LM	Φ55xH235mm	0.70Kg
TSN20K4-38		4000K	20W	1807LM	Φ55xH235mm	
TSN33K3-38	Nero Black	3000K	33W	2420LM	Φ72xH242mm	0.90Kg
TSN33K4-38		4000K	33W	2805LM	Φ72xH242mm	




ACCESSORIES FOR TRACK LIGHT

White TS0440S
Black TSN0440S




■ Dimension



White TS1MT / TS2MT
Black TSN1MT / TSN2MT



■ Dimension




3-PHASE TRACK

Power connector


White TS0431L
Black TSN0431L



■ Dimension



Zero line position




End cap

White TS0432
Black TSN0432



■ Dimension




ACCESSORIES FOR TRACK LIGHT

Conducting connector

White TS0433
Black TSN0433



■ Dimension




"L" connector "left"


White TS0435L
Black TSN0435L



■ Dimension



Zero line position




"L" connector "right"


White TS0435R
Black TSN0435R



■ Dimension



Zero line position




"T" connector "right II"


White TS0437R2
Black TSN0437R2



■ Dimension



Zero line position




"+" connector


White TS0437
Black TSN0437



■ Dimension



Zero line position





LED Ground Lights & Wall Lamp

■ PRESTAZIONI / PERFORMANCE

Ideali per arricchire ambienti esterni o interni con un prodotto semplice ma elegante. L'ampia gamma e versatilità d'applicazione (pavimento, parete) offre soluzioni alle esigenze più diverse con la garanzia di un alto grado di protezione.

A wide range of outdoor recessed LED equipment, perfect for architectural, accent or pathway lighting.

The materials used and the ample choice of available configurations, together with high protection rating, enable a wide range of uses for many applications, about outside and the ground or wall and inside, on the floor, wall and ceiling.

The range is made up of drive, walk over recessed spotlights.

■ CARATTERISTICHE / FEATURES

Assenza di Mercurio

Mercury-free lamps

CRI: Ra>80

CRI: Ra>80


INSTANT LIGHT ON:

INSTANT LIGHT ON:

<0.5 s = 100% light



<0.5 s = 100% light

LED GROUND LIGHT SERIES

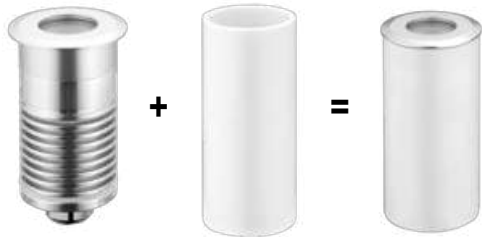



IP67

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
MINIFL-3W-WW	Silver	3000K	3W	240LM	Φ40x62.7mm	0.20Kg
MINIFL-3W-NW		4000K	3W	240LM		
MINIFL-3W-CW		6500K	3W	240LM		

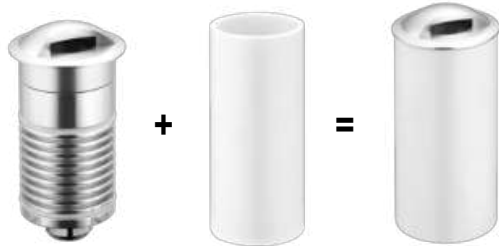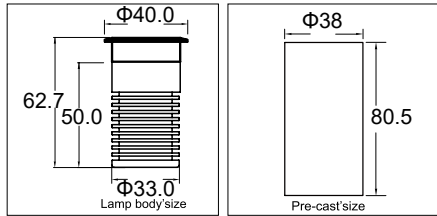

IP67

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
MINIFS-3W-WW	Silver	3000K	3W	240LM	Φ40x69mm	0.20Kg
MINIFS-3W-NW		4000K	3W	240LM		
MINIFS-3W-CW		6500K	3W	240LM		

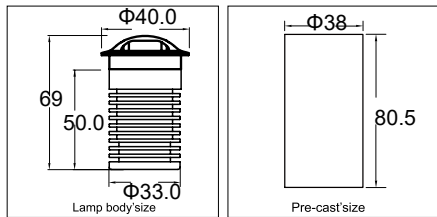


LED GROUND LIGHT SERIES





IP67

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FL-3W-WW	Silver	3000K	3W	240LM	Φ64.5x69mm	0.25Kg
FL-3W-NW		4000K	3W	240LM		
FL-3W-CW		6500K	3W	240LM		



IP67

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FS-3W-WW	Silver	3000K	3W	240LM	Φ64.5x71mm	0.25Kg
FS-3W-NW		4000K	3W	240LM		
FS-3W-CW		6500K	3W	240LM		

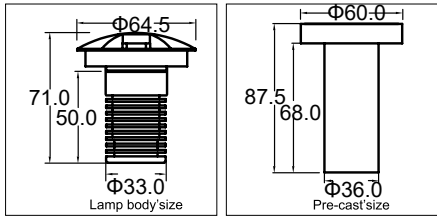


IP67

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FT-3W-WW	Silver	3000K	3W	240LM	Φ64.5x71mm	0.25Kg
FT-3W-NW		4000K	3W	240LM		
FT-3W-CW		6500K	3W	240LM		





LED GROUND LIGHT SERIES

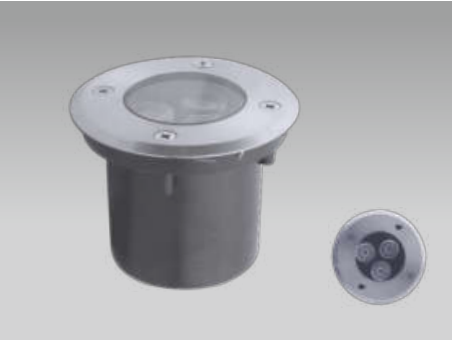

IP67





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Net Weight
FL-3x1W-WW	Inox	3000K	3W	240LM	>80Ra	0.50Kg
FL-3x1W-NW		4000K	3W	240LM	>80Ra	
FL-3x1W-CW		6500K	3W	240LM	>80Ra	

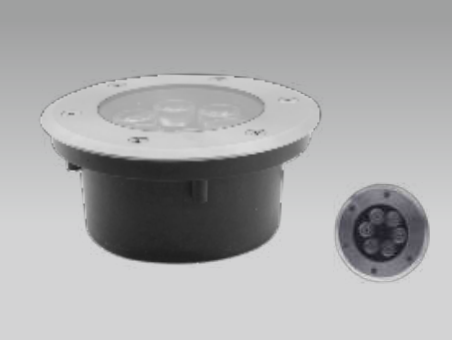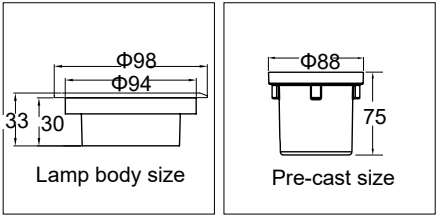

IP67





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Net Weight
FL-6x1W-WW	Inox	3000K	6W	480LM	>80Ra	0.70Kg
FL-6x1W-NW		4000K	6W	480LM	>80Ra	
FL-6x1W-CW		6500K	6W	480LM	>80Ra	

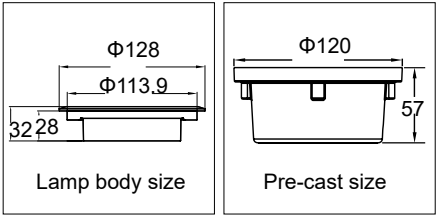

IP67



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Net Weight
FL-9x1W-WW	Inox	3000K	9W	720LM	>80Ra	1.40Kg
FL-9x1W-NW		4000K	9W	720LM	>80Ra	
FL-9x1W-CW		6500K	9W	720LM	>80Ra	

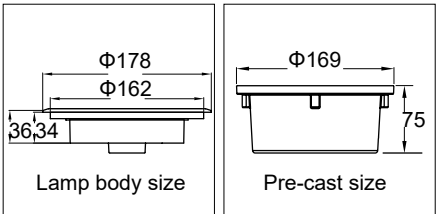


LED GROUND LIGHT SERIES



IP67





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Net Weight
FL-3x3W-RGB	Inox	RGB	9W	420LM	>80Ra	0.50Kg

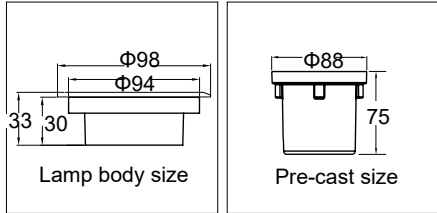



IP67




Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Net Weight
FL-9x1W-RGB	Inox	RGB	9W	420LM	>80Ra	1.40Kg

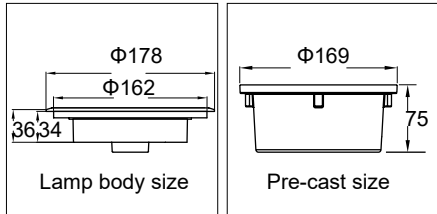

IP67

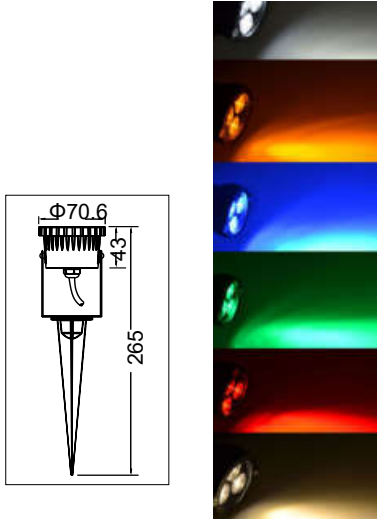

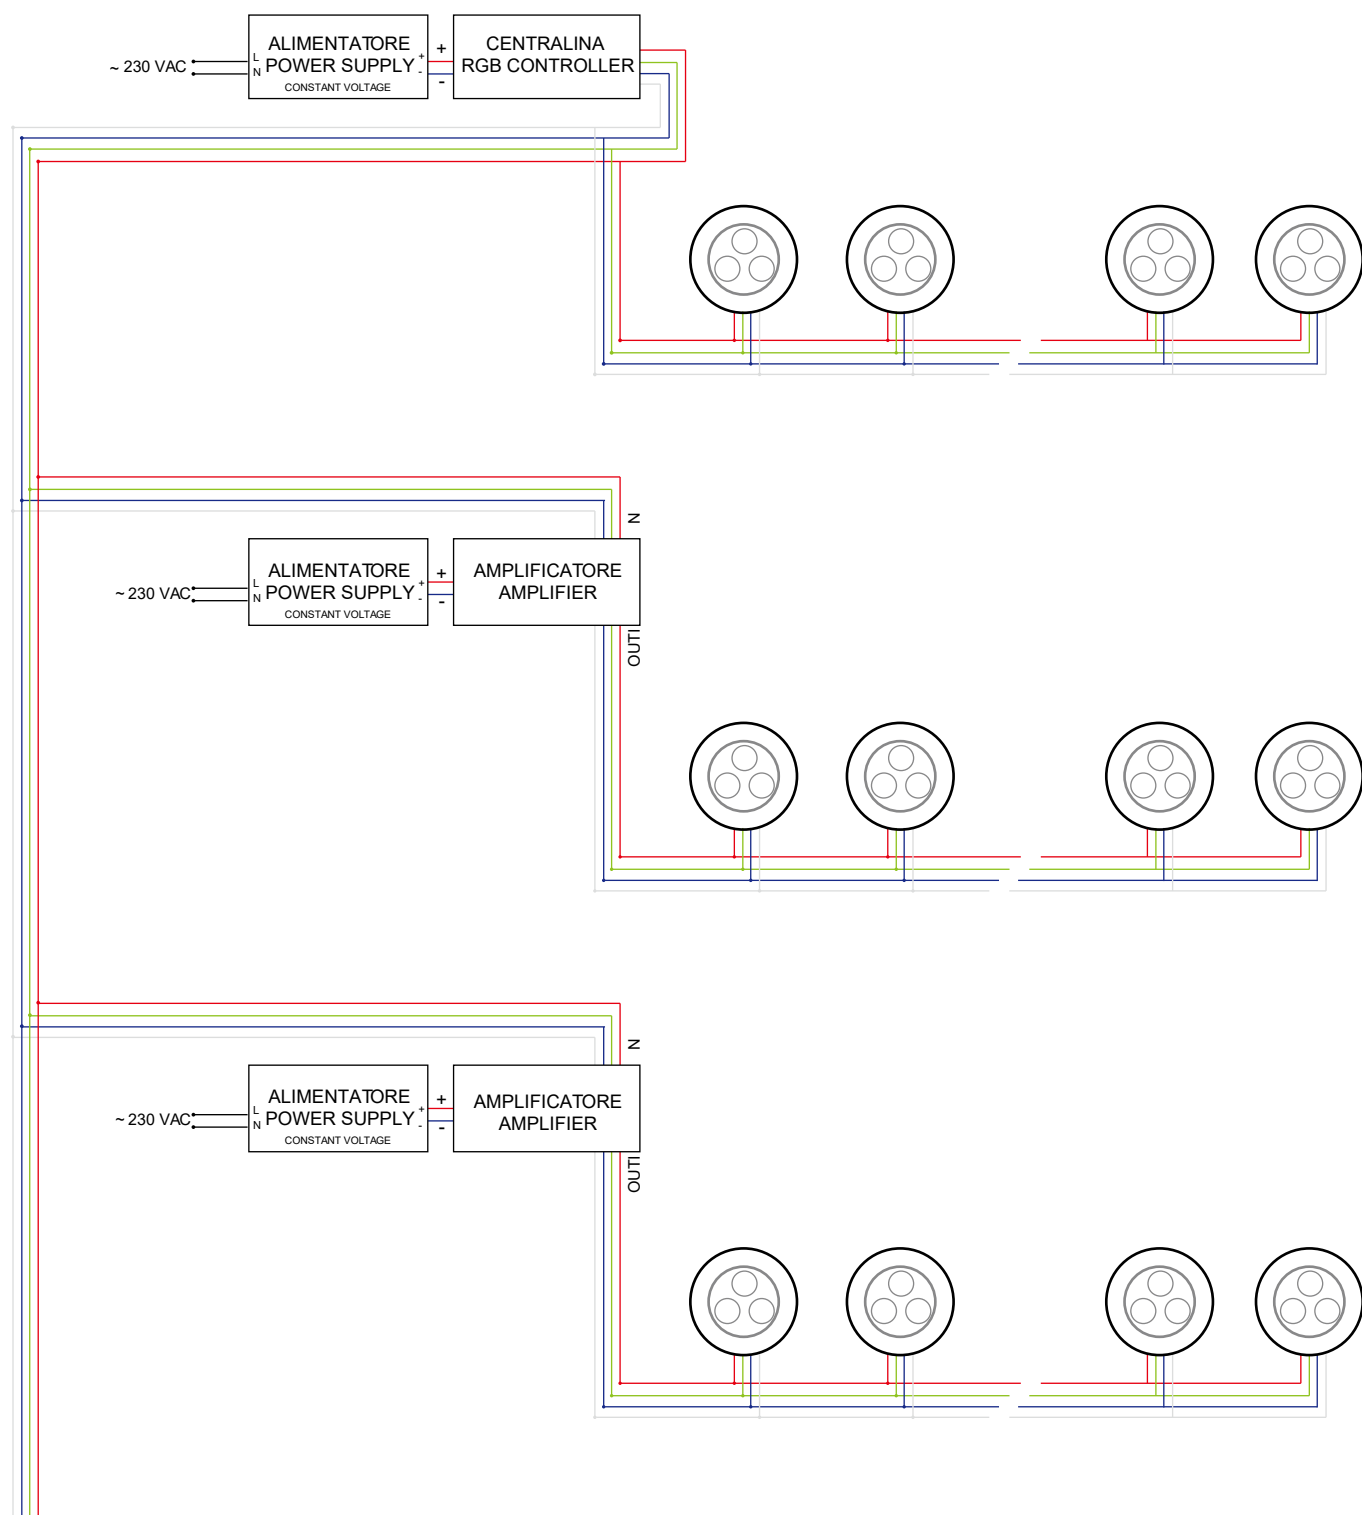


**Toughened frosted glass able to
withstand 2000kg at 30km/h**

FL 3×1W



FL 6×1W

FL 9×1W

LED WALL LAMP SERIES

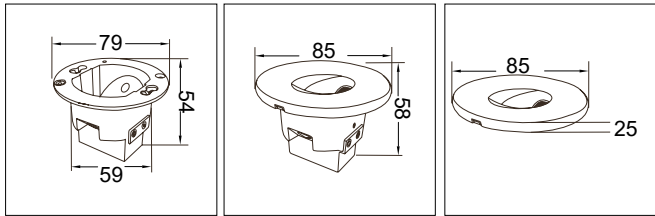

○ Bianco
White
● Nero
Black



IP44

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
A615	Bianco White Nero Black	3000K 4000K 6000K	3W	120lm	>0.5	>80Ra	Ø79x59mm	Ø59mm	0.30Kg

Ghiere disponibili / Available cover



A615R1N
Ø85x25mm



A615R1B
Ø85x25mm



A615S1N
85x85x25mm



A615S1B
85x85x25mm



A615R2N
Ø85x25mm



A615R2B
Ø85x25mm



A615S2N
85x85x25mm




A615S2B
85x85x25mm



A615S3N
85x85x25mm




A615S3B
85x85x25mm



LED WALL LAMP SERIES




LED WALL LAMP SERIES

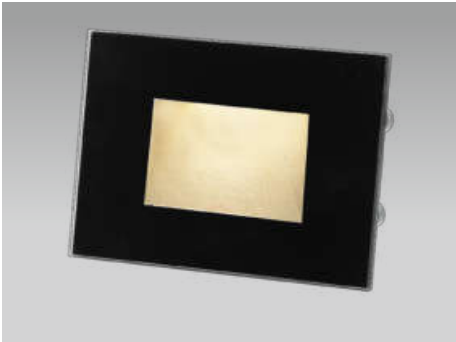

503

A003CCT




B003CCT

- 3000/4000/6000K 3 in 1
 - Housing: Aluminum
 - Cover: Tempered glass
 - Suitable to box 503
 - Energy Class: A+
-
- 3000/4000/6000K 3 in 1
 - Corpo: Alumimio
 - Frontale: Vetro temperato
 - Predisposto per alloggiamento della scatola 503
 - Classe risparmio energetico: A+




IP66

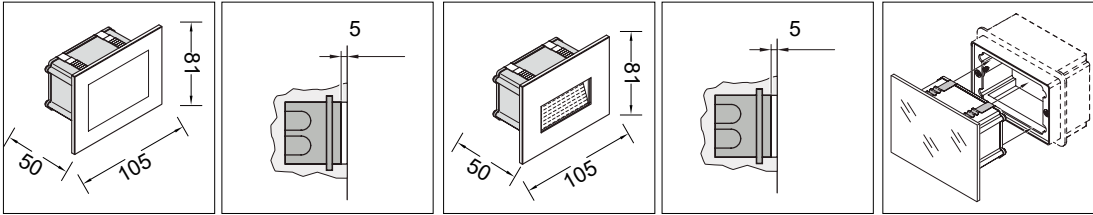



Codice Code	Finitura Finishing	CCT	Angolo Angle	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
A003CCT3B	Bianco White	3000K	120°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	0.30Kg
A003CCT3G	Grigio Gray	4000K	120°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	
A003CCT3N	Nero Black	6000K	120°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	

IP66

Codice Code	Finitura Finishing	CCT	Angolo Angle	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
B003CCT3B	Bianco White	3000K	38°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	0.30Kg
B003CCT3G	Grigio Gray	4000K	38°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	
B003CCT3N	Nero Black	6000K	38°	3W	200lm	>0.5	>80Ra	115x81x50mm	87.5x53x55mm	



503



3 Ghiere include

IP65

Codice Code	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Foro Cutcut	Net Weight
A902-3CCT	2.5W	150lm	>0.5	>80Ra	107x67x50mm	102x60mm	0.10Kg

WITH EMERGENCY


IP20

EMERGENCY


Codice Code	Potenza Wattage	Lumen	Potenza in emergenza Wattage in emergency	Durata batteria (ore) Battery working time (hrs)
A902E-3CCT	2.5W	150lm	1.5W	2



Batteria: 3.7V / 1200mA 18650 LITIO
Battery: 3.7V / 1200mA 18650 LITHIUM



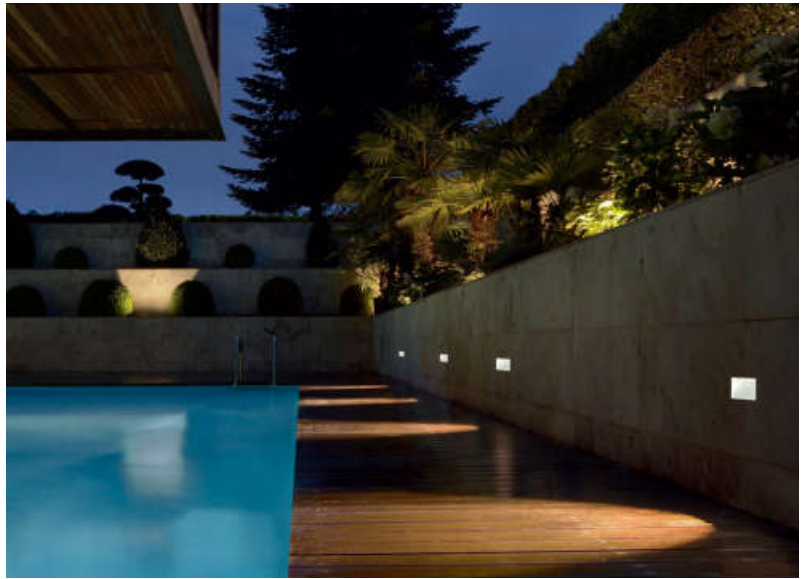


LED WALL LAMP SERIES

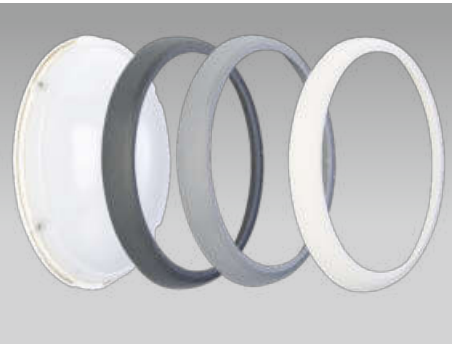

- Corpo e copertura in PC, resistenti alle alte temperature
 - CCT regolabile per coprire un'ampia gamma di soluzioni
 - Installazione facile
 - Garanzia: 2 anni
- Premium PC base and PC cover, resistant to high temperature and low glare effect
 - Adjustable CCT for covering wide range of solutions
 - Easy installation
 - Warranty: 2 years


Bianco White
Silver Silver
Nero Black

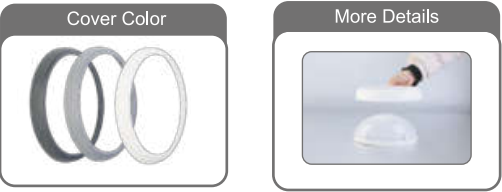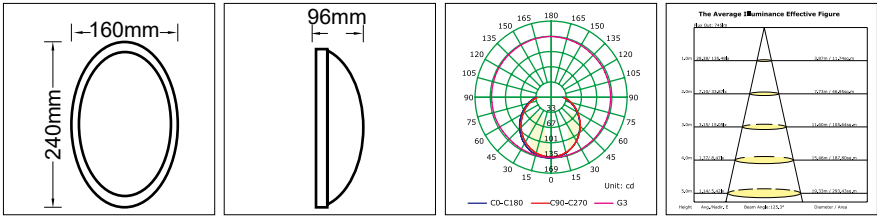

3 Rings included in the packing
3 Ghiera incluse nella confezione

IP65


Codice Code	CCT	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Net Weight
BH0116	3000K 4000K 6000K	12W	700lm	>0.5	>80Ra	160x240x96mm	0.50Kg



LED WALL LAMP SERIES



- Base e copertura per PC, resistenti alle alte temperature
 - Installazione facile
 - Garanzia: 2 anni
- Premium PC base and PC cover, resistant to high temperature and low glare effect
 - Easy installation
 - Warranty: 2 years

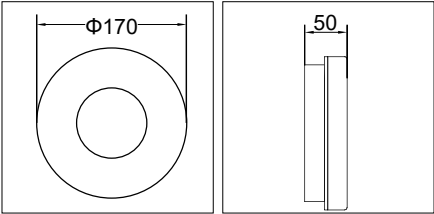


IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
BH0117	Bianco White	4000K	12W	840lm	210x116x50mm	0.36Kg



- Base e copertura per PC, resistenti alle alte temperature
 - Installazione facile
 - Garanzia: 2 anni
- Premium PC base and PC cover, resistant to high temperature and low glare effect
 - Easy installation
 - Warranty: 2 years

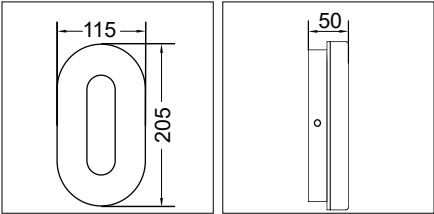

IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
BH0118	Bianco White	4000K	12W	840lm	210x116x50mm	0.40Kg



LED Flood Lights & Street Lights

■ PRESTAZIONI / PERFORMANCE

Prodotti concepiti per l'illuminazione di tutti gli spazi esterni come grandi aree, giardini e portici, illuminazione residenziale e stradale.

I prodotti offrono ottime prestazioni illuminotecniche con un consumo energetico ridotto fino al 70% rispetto ai sistemi tradizionali.

Alto grado di protezione, temperature di colore 3000, 4000, 6000K, RGB e un alto indice di resa cromatica (CRI <80) consentono l'utilizzo nelle più svariate applicazioni.


I materiali utilizzati, alluminio pressofuso, vetri di protezione temprati, minuterie in acciaio, garantiscono resistenza e durata nel tempo.

Products designed for the lighting of all outdoor spaces such as large areas, gardens and arcades, residential and street lighting.

The products offer excellent lighting performance with energy consumption reduced by up to 70% compared to traditional systems.

High degree of protection, color temperatures 3000, 4000, 6000K, RGB and a high color rendering index (CRI <80) allow it to be used in the most varied applications.

The materials used, die-cast aluminum, tempered safety glass, small steel parts, guarantee resistance and durability over time.


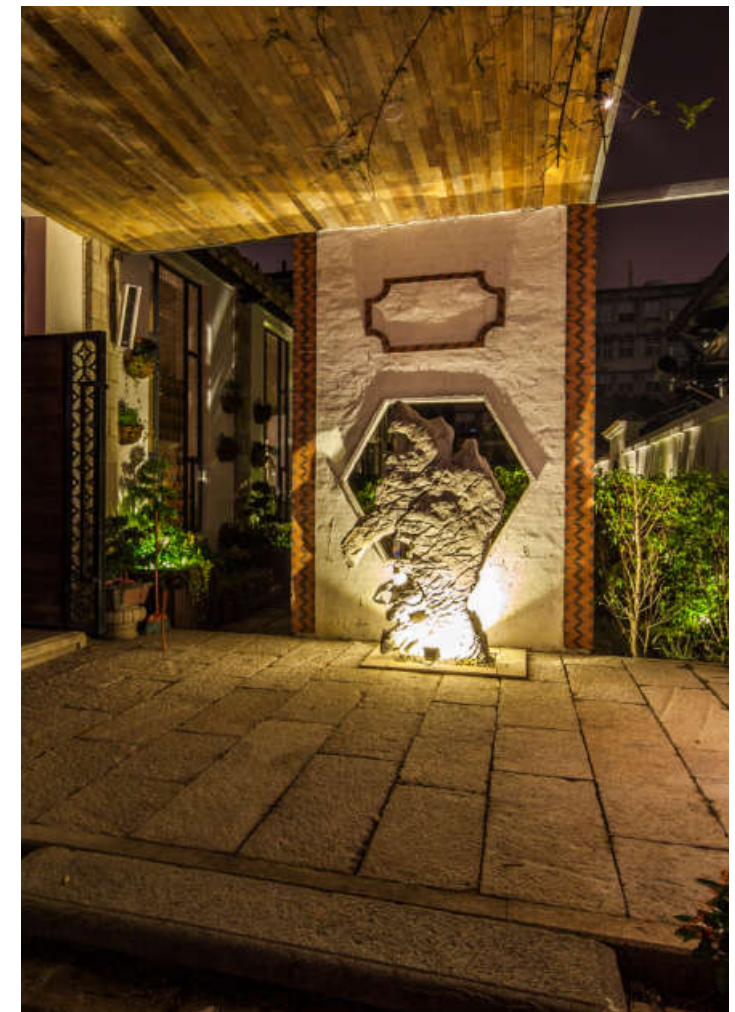




LED FLOOD LIGHTS



- Proiettore di buone prestazioni illuminotecniche.
 - Il design curato e la scelta di componenti di qualità lo rendono ottimale per l'illuminazione di grandi aree.
 - In estrusione di alluminio garantisce un'eccellente dissipazione del calore. Con vetro trasparente temprato resistente agli shock termici.
 - Distribuzione simmetrica diffondente.
 - Garanzia: 5 anni
- Projector with good lighting performance.
 - The careful design and the choice of quality components make it ideal for lighting large areas. Made of extruded aluminum, it guarantees excellent heat dissipation.
 - With transparent tempered glass resistant to thermal shock.
 - Diffusing symmetrical distribution.
 - Warranty: 5 years



IK08

IP66

MW

Codice Code	CCT	Potenza Wattage	Lumen	PF	CRI	Dimensioni Dimensions	Net Weight
FD200TW	3000K 4000K 6000K	200W	70~80lm/W	>0.9	>80Ra	390x290x97mm	5.5Kg

175V
265V
50/60Hz

90°

CLASS I

CE

RoHS

ErP


TUV

IEC

Outdoor


L70 to 45000hrs

LED FLOOD LIGHTS

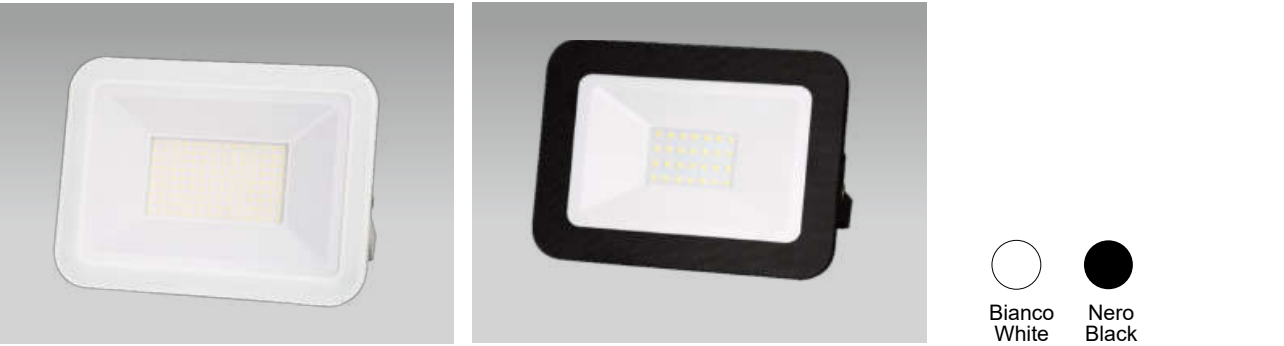

- Corpo in pressofusione di alluminio.
 - Vetro di chiusura temprato e serigrafato.
 - Design brevettato
 - Garanzia: 2 anni
- Die-cast aluminum body.Tempered and silk-screened closing glass.
 - Patented design.
 - Warranty: 2 years

IP65

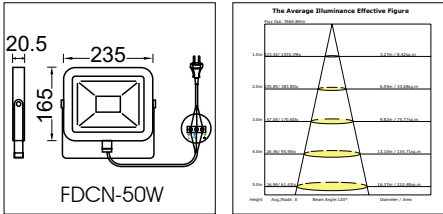


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FDBN -10W-WW	Bianco White	3000K	10W	900LM	118x85x20.5mm	0.50Kg
FDBN -10W-NW		4000K	10W	900LM	118x85x20.5mm	
FDBN -20W-WW	Bianco White	3000K	20W	1800LM	162x115x20.5mm	0.60Kg
FDBN -20W-NW		4000K	20W	1800LM	162x115x20.5mm	
FDBN -30W-WW	Bianco White	3000K	30W	2700LM	193x138x20.5mm	0.80Kg
FDBN -30W-NW		4000K	30W	2700LM	193x138x20.5mm	
FDBN -50W-WW	Bianco White	3000K	50W	4500LM	235x165x20.5mm	1.20Kg
FDBN -50W-NW		4000K	50W	4500LM	235x165x20.5mm	
FDBN -100W-WW	Bianco White	3000K	100W	9000LM	300x220x31mm	2.10Kg
FDBN -100W-NW		4000K	100W	9000LM	300x220x31mm	

FDCN -10W-WW	Nero Black	3000K	10W	900LM	118x85x20.5mm	0.50Kg
FDCN -10W-NW		4000K	10W	900LM	118x85x20.5mm	
FDCN -20W-WW	Nero Black	3000K	20W	1800LM	162x115x20.5mm	0.60Kg
FDCN -20W-NW		4000K	20W	1800LM	162x115x20.5mm	
FDCN -30W-WW	Nero Black	3000K	30W	2700LM	193x138x20.5mm	0.80Kg
FDCN -30W-NW		4000K	30W	2700LM	193x138x20.5mm	
FDCN -50W-WW	Nero Black	3000K	50W	4500LM	235x165x20.5mm	1.20Kg
FDCN -50W-NW		4000K	50W	4500LM	235x165x20.5mm	
FDCN -100W-WW	Nero Black	3000K	100W	9000LM	300x220x31mm	2.10Kg
FDCN -100W-NW		4000K	100W	9000LM	300x220x31mm	



LED FLOOD LIGHTS



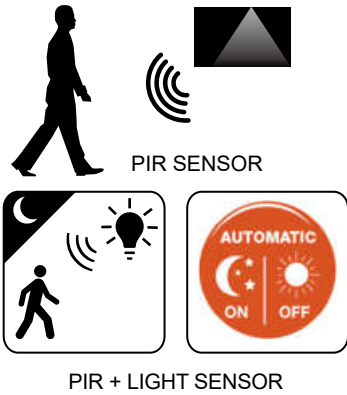


LED 3CCT DIY SENSOR IPAD Flood Light

- Corpo in pressofusione di alluminio.
 - Vetro di chiusura temprato e serigrafato.
 - Design brevettato
 - Garanzia: 2 anni
- Die-cast aluminum body.Tempered and silk-screened closing glass.
 - Patented design.
 - Warranty: 2 years



EU Patent NO.:
No 004561009-0001

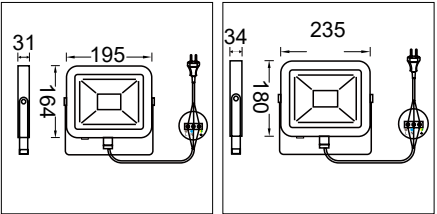

IP65

DIY

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FDCN-30W-3CCT-PIR	Nero Black	3000K 4000K 6000K	30W	90-100lm/W	164x195x31mm	0.80Kg
FDCN-50W-3CCT-PIR	Nero Black	3000K 4000K 6000K	50W	90-100lm/W	180x235x34mm	1.20Kg

FDCN-PIR PIR Sensor as optional




LED FLOOD LIGHTS





LED RGB Flood Light


- Corpo in pressofusione di alluminio.
- Vetro di chiusura temprato e serigrafato.
- Design brevettato
- Garanzia: 2 anni
- Die-cast aluminum body.Tempered and silk-screened closing glass.
- Patented design.
- Warranty: 2 years




EU Patent NO.:
No 004561009-0001





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Dimensioni Dimensions	Net Weight
FDCN-50W-RGB	Nero Black	RGB	50W	165x235x20.5mm	1.20Kg

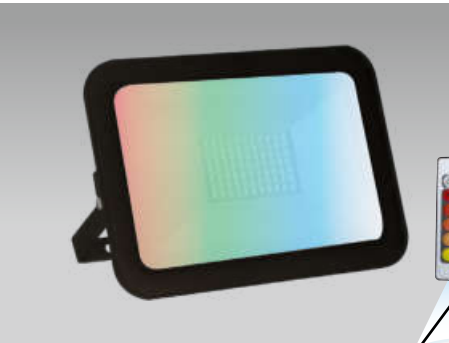

- Corpo in pressofusione di alluminio.
- Vetro di chiusura temprato e serigrafato.
- Design brevettato
- Garanzia: 2 anni
- Die-cast aluminum body.Tempered and silk-screened closing glass.
- Patented design.
- Warranty: 2 years





EU Patent NO.:
No 004561009-0001





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FDCN-30W-RGBNW	Nero Black	RGB+NW	30W	90-100lm/W	138x193x20.5mm	0.80Kg



LED FLOOD LIGHTS



EU Patent NO.:
No 004561009-0001





Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
FDCN-30W-3CCT	Nero Black	3000K 4000K 6000K	30W	90-100lm/W	164x195x31mm	0.80Kg
FDCN-50W-3CCT	Nero Black	3000K 4000K 6000K	50W	90-100lm/W	180x235x34mm	1.20Kg




SEPIK




- Corpo in pressofusione di alluminio.
- Vetro di chiusura temprato e serigrafato.
- Box di connessione sul retro IP65
- Design brevettato
- Garanzia: 2 anni
- Die-cast aluminum body.
- Tempered and silk-screened closing glass.
- Connection box on the back IP65
- Patented design.
- Warranty: 2 years



Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
FDT-30W	Nero Black	3000K 4000K 6000K	30W	2400lm	>80Ra	>0.9	198x190.5x43.5mm	0.90Kg
FDT-50W	Nero Black	3000K 4000K 6000K	50W	4000lm	>80Ra	>0.9	229x213x43.5mm	1.20Kg




LED FLOOD LIGHTS

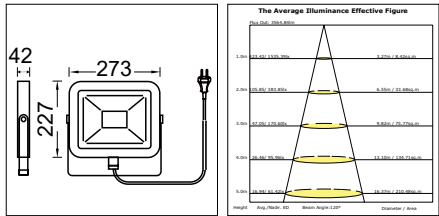

IP65


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	PF	Dimensioni Dimensions	Net Weight
FD50K6	Nero Black	6000K	50W	4500LM	>80Ra	>0.9	273x227x42mm	1.50Kg



IP65


Codice Code	Max.Altezza Max.Height	Color	Net Weight
FD50/H2-2	2mt	Yellow	2.90Kg

LED STREET LIGHTS

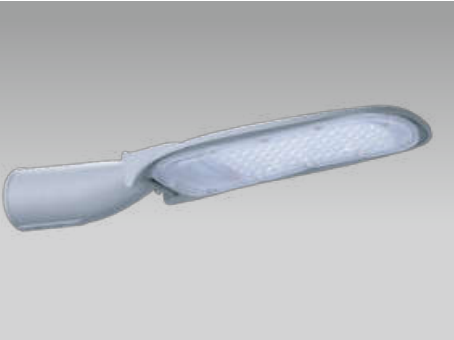


IP65

Codice Code	Potenza Wattage	Lumen	CCT	CRI	PF	LED Type	Dimensioni Dimensions	Installation Pipe Diameter	Installation Height	Net Weight	Gross Weight
J50-NW	50W	5000LM	4000K	>80Ra	>0.9	3030 SMD	490x165x72mm	ø60mm	6-8m	1.6Kg	1.70Kg



LED Super Slim Street Light

- Armatura stradale realizzata in alluminio pressofuso verniciato a polvere.
- Ottica in PMMA ad alto rendimento, resistente alle alte temperature.
- Staffa adatta sia per i pali diritti che per i pali a frusta.
- Garanzia 5 anni
- Street lighting made of powder-coated die-cast aluminum.
- High-performance PMMA optic, resistant to high temperatures.
- Bracket suitable for both straight poles and whip poles.
- Warranty: 5 years






IP65

Codice Code	Potenza Wattage	Lumen	CCT	CRI	PF	LED Type	Dimensioni Dimensions	Installation Pipe Diameter	Installation Height	Net Weight	Gross Weight
Z120-60W-NW	60W	120lm/W	4000K	>80Ra	>0.9	3030 SMD	621x287x105 mm	ø60mm	6-8m	4.50Kg	5.60Kg
Z120-100W-NW	100W	120lm/W	4000K	>80Ra	>0.9	3030 SMD	738x289x118mm	ø60mm	6-8m	5.20Kg	6.30Kg
Z180-150W-NW	150W	120lm/W	4000K	>80Ra	>0.9	3030 SMD	922x362x140mm	ø60mm	8-10m	8.20Kg	10.10Kg
Z180-200W-NW	200W	120lm/W	4000K	>80Ra	>0.9	3030 SMD	922x362x140mm	ø60mm	10-12m	8.20Kg	10.10Kg



LED Z Street Light

- Armatura stradale realizzata in alluminio pressofuso verniciato a polvere.
- Vetro trasparente temprato e resistente agli shock termici.
- Ottica in PMMA ad alto rendimento, resistente alle alte temperature.
- Staffa adatta sia per i pali diritti che per i pali a frusta.
- Garanzia: 5 anni
- Street lighting made of powder-coated die-cast aluminum.
- Transparent tempered glass resistant to thermal shocks.
- High-performance PMMA optic, resistant to high temperatures.
- Bracket suitable for both straight poles and whip poles.
- Warranty: 5 years



LED Highbay Lights



■ PRESTAZIONI / PERFORMANCE

Riflettore industriale progettato per l'installazione in ambienti industriali di grandi dimensioni, reparti produttivi, magazzini e grandi aree.



Industrial reflector designed for installation in large industrial environments, production departments, warehouses and large areas.



LED HIGHBAYLIGHTS

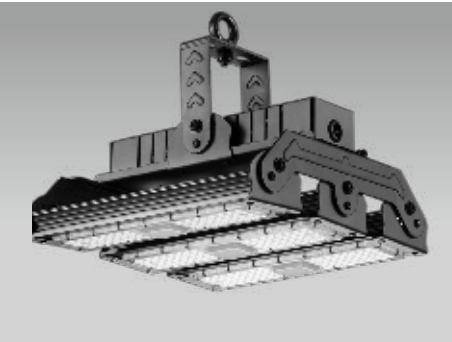
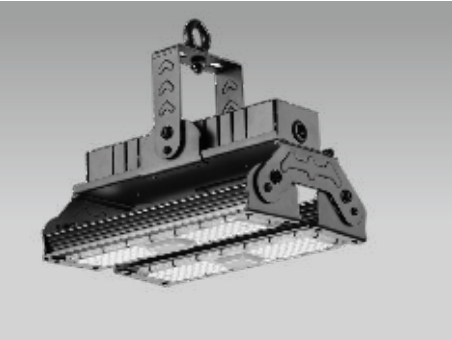


- Supporto e vano ottico realizzati in alluminio verniciati a forno colore nero.
- Ottiche in PC.
- Vano ottico orientabile fino a 45°.
- Angolo del fascio standard 60°, 25° e 90° disponibile per opzione.
- Disponibili kit di sospensione e montaggio a parete.
- Garanzia: 5 anni
- Strong modern aluminum housing, Excellent finish.
- Standard beam angle 60°, 25° & 90° available for option.
- Suspension kit and wall mounting available.
- Warranty: 5 years.

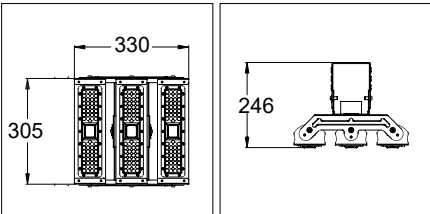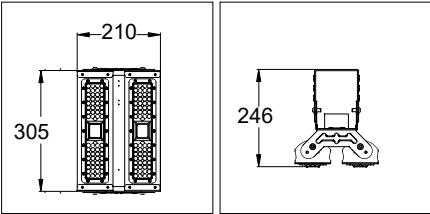


IP65


Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
B0302-NW	Nero Black	4000K	100W	12500LM	305X210X246mm	4.90Kg
B0303-NW 1-10V dimmable		4000K	150W	18750LM	305X330X246mm	6.30Kg

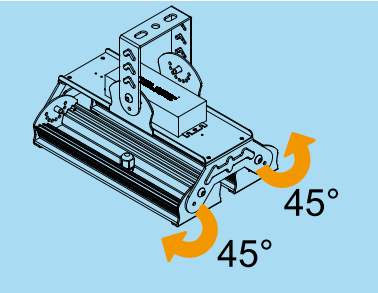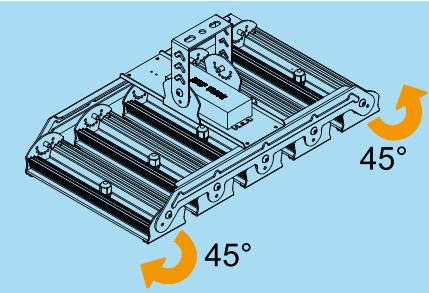

LED LINEAR Highbaylights

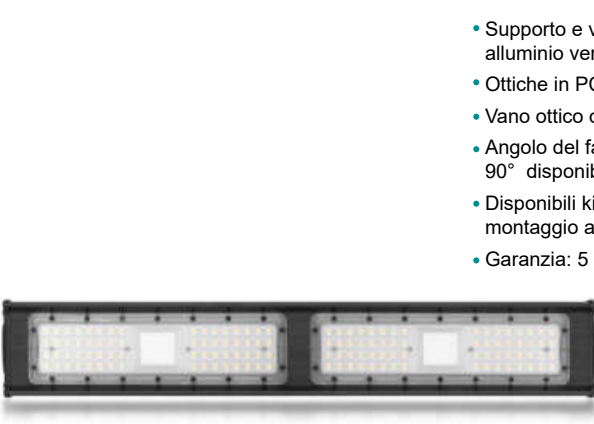

- Supporto e vano ottico realizzati in alluminio verniciati a forno colore nero.
- Ottiche in PC.
- Vano ottico orientabile fino a 45°.
- Angolo del fascio standard 60°, 25° e 90° disponibile per opzione.
- Disponibili kit di sospensione e montaggio a parete.
- Garanzia: 5 anni
- Strong modern aluminum housing, Excellent finish.
- Standard beam angle 60°, 25° & 90° available for option.
- Suspension kit and wall mounting available.
- Warranty: 5 years.

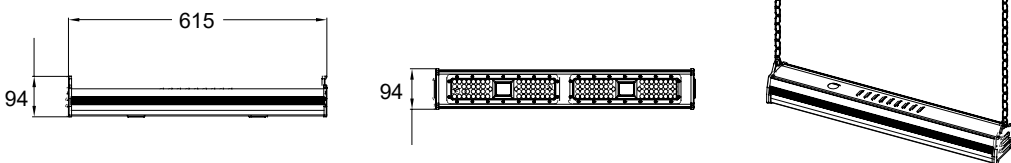


IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
B0601-NW	Nero Black	4000K	100W	12500LM	615X94X94mm	3.10Kg



IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	Dimensioni Dimensions	Net Weight
B1201-NW 1-10V dimmable	Nero Black	4000K	200W	25000LM	1215X94X94mm	5.30Kg




LED NEW HIGHBAY LIGHTS



- Riflettore industriale con corpo e dissipatore integrato in pressofusione di alluminio verniciato nero.
 - Schermo in policarbonato resistente agli shock termici.
 - Angolo di apertura 120°
 - Dimmerabile 1-10V
 - Garanzia: 5 anni
- Industrial reflector with body and integrated heat sink in black painted die-cast aluminum.
 - Thermal shock resistant polycarbonate screen. 120 ° opening angle 1-10V dimmable.
 - Warranty: 5 years



Dimmable

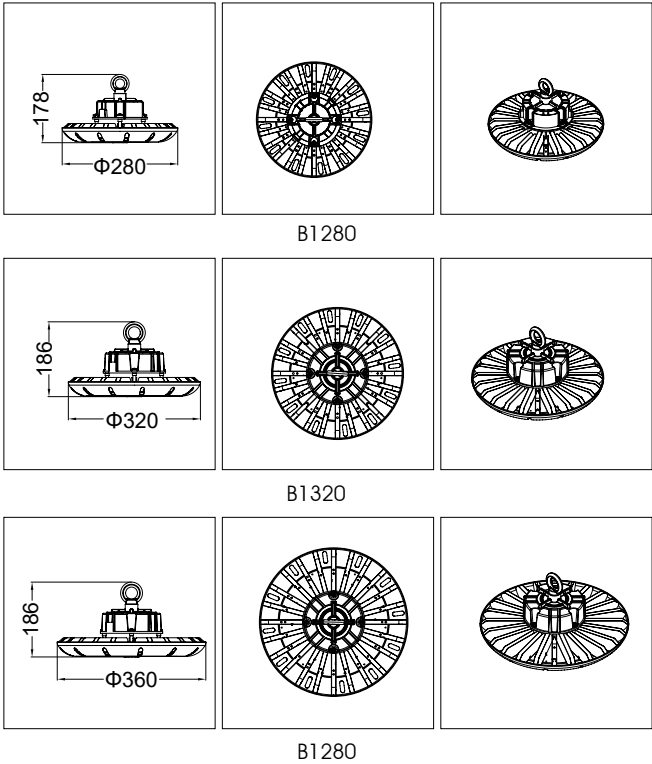

140+ lm/W

IP65

Codice Code	Finitura Finishing	CCT	Potenza Wattage	Lumen	CRI	Dimensioni Dimensions	Net Weight
B1280-NW	Nero Black	4000K	100W	14000LM	>80Ra	Φ280x178mm	2.40Kg
B1320-NW	Nero Black	4000K	150W	21000LM	>80Ra	Φ320x186mm	3.60Kg
B1360-NW	Nero Black	4000K	200W	28000LM	>80Ra	Φ360x186mm	4.0Kg





LED Strip

■ PRESTAZIONI / PERFORMANCE

Caratterizzate da un'ampia versatilità, queste strisce sono particolarmente utili per molteplici applicazioni. Le strisce LED sono facili da installare, sono caratterizzate da un bassissimo consumo energetico e durano per oltre 30.000 ore senza alcuna manutenzione. la gamma offre diverse tipologie di led e tre differenti gradi di protezione IP20 / IP64 / IP67 così da soddisfare le esigenze più disparate.

Characterized by a wide versatility, these strips are particularly useful for multiple applications.

The LED strips are easy to install, are characterized by a very low energy consumption and last for over 30,000 hours without any maintenance.

The range offers different types of LEDs and three different degrees of protection IP20 / IP64 / IP67 in order to satisfy the most diverse needs.

3528 SMD LED STRIP

- Striscia led flessibile su circuito bianco riflettente.
 - Le versioni IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
 - IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
 - La striscia è fornita in bobina da 5m.
 - Temperatura di Lavoro: -20°C ~ +35°C
 - Classe risparmio energetico: F
 - Disponibile anche 2700K su richiesta
- Flexible led strips with reflective white circuit
 - The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
 - IP64 is protected with silicone, IP67 is protected with the silicone tube
 - The strip is supplied in 5m/reel
 - Energy saving class: A +
 - Working temperature: -20°C ~ +35°C
 - Available on request 2700K




Dimmable

CRI > 90 Step MacAdam:3

9.6W 720 lm 120LED/m



Versione DC24V: ogni 6 LED/50mm
DC24V versione: every 6 LED/50mm



Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.


Codice Code	n° Led	LED TYPE	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R600/352820WW24	120/m	3528 SMD	3000K	9.6W/m	720LM/m	5m	20
R600/352820NW24	120/m	3528 SMD	4000K	9.6W/m	720LM/m	5m	
R600/352820CW24	120/m	3528 SMD	6000K	9.6W/m	720LM/m	5m	
R600/352864WW24	120/m	3528 SMD	3000K	9.6W/m	640LM/m	5m	64
R600/352864NW24	120/m	3528 SMD	4000K	9.6W/m	640LM/m	5m	
R600/352864CW24	120/m	3528 SMD	6000K	9.6W/m	640LM/m	5m	



20W 1440 lm 240LED/m



Versione DC24V: ogni 6 LED/25mm
DC24V versione: every 6 LED/25mm



Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	n° Led	LED TYPE	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R1200/352820WW24	240/m	3528 SMD	3000K	20W/m	1440LM/m	2.50m	20
R1200/352820NW24	240/m	3528 SMD	4000K	20W/m	1440LM/m	2.50m	
R1200/352820CW24	240/m	3528 SMD	6000K	20W/m	1440LM/m	2.50m	
R1200/352864WW24	240/m	3528 SMD	3000K	20W/m	1300LM/m	2.50m	64
R1200/352864NW24	240/m	3528 SMD	4000K	20W/m	1300LM/m	2.50m	
R1200/352864CW24	240/m	3528 SMD	6000K	20W/m	1300LM/m	2.50m	



3014 SMD LED STRIP

- Striscia led flessibile su circuito bianco riflettente.
 - Le versioni IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
 - IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
 - La striscia è fornita in bobina da 5m.
 - Temperatura di Lavoro: -20°C ~ +35°C
 - Classe risparmio energetico: F
 - Disponibile anche 2700K su richiesta
- Flexible led strips with reflective white circuit
 - The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
 - IP64 is protected with silicone, IP67 is protected with the silicone tube
 - The strip is supplied in 5m/reel
 - Energy saving class: A +
 - Working temperature: -20°C ~ +35°C
 - Available on request 2700K




Dimmable

CRI > 90 Step MacAdam:3

14.4W 1080 lm 120LED/m



Versione DC24V: ogni 6 LED/50mm
DC24V versione: every 6 LED/50mm




Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	n° Led	LED TYPE	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R600/301420WW24	120/m	3014 SMD	3000K	14.4W/m	1080LM/m	5m	20
R600/301420NW24	120/m	3014 SMD	4000K	14.4W/m	1080LM/m	5m	
R600/301420CW24	120/m	3014 SMD	6000K	14.4W/m	1080LM/m	5m	
R600/301464WW24	120/m	3014 SMD	3000K	14.4W/m	980LM/m	5m	64
R600/301464NW24	120/m	3014 SMD	4000K	14.4W/m	980LM/m	5m	
R600/301464CW24	120/m	3014 SMD	6000K	14.4W/m	980LM/m	5m	

25W 1840 lm 204LED/m



Versione DC24V: ogni 6 LED/29.4mm
DC24V versione: every 6 LED/29.4mm



Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	n° Led	LED TYPE	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R1020/301420WW24	204/m	3014 SMD	3000K	25W/m	1840LM/m	2.50m	20
R1020/301420NW24	204/m	3014 SMD	4000K	25W/m	1840LM/m	2.50m	
R1020/301420CW24	204/m	3014 SMD	6000K	25W/m	1840LM/m	2.50m	
R1020/301464WW24	204/m	3014 SMD	3000K	25W/m	1650LM/m	2.50m	64
R1020/301464NW24	204/m	3014 SMD	4000K	25W/m	1650LM/m	2.50m	
R1020/301464CW24	204/m	3014 SMD	6000K	25W/m	1650LM/m	2.50m	



2835 SMD LED STRIP

- Striscia led flessibile su circuito bianco riflettente.
- Le versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
- IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
- La striscia è fornita in bobina da 5m.
- Temperatura di Lavoro: -20°C ~ +35°C
- Classe risparmio energetico: D
- Disponibile anche 2700K su richiesta

- Flexible led strips with reflective white circuit
- The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- IP64 is protected with silicone, IP67 is protected with the silicone tube
- The strip is supplied in 5m/reel
- Energy saving class: D
- Working temperature: -20°C ~ +35°C
- Available on request 2700K




Dimmable

CRI > 90

Step MacAdam:3

15W 2100 lm 84LED/m

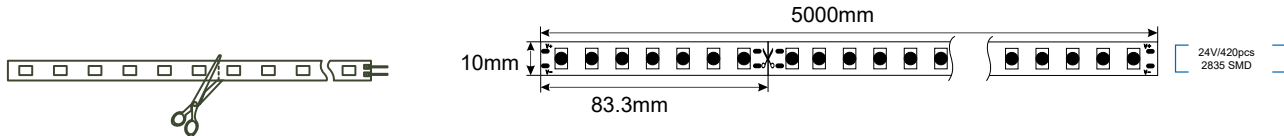


Versione DC24V: ogni 7 LED/83.3mm
DC24V version: every 7 LED/83.3mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	Leds/m	LED TYPE	CCT	Potenza Wattage	CRI	Lumen	Max length connectable	IP
R420/283520WW24	84pcs	2835 SMD	3000K	15W/m	>90Ra	2100LM/m	5m	20
R420/283520NW24	84pcs	2835 SMD	4000K	15W/m	>90Ra	2100LM/m	5m	
R420/283520CW24	84pcs	2835 SMD	6000K	15W/m	>90Ra	2100LM/m	5m	
R420/283564WW24	84pcs	2835 SMD	3000K	15W/m	>90Ra	2100LM/m	5m	64
R420/283564NW24	84pcs	2835 SMD	4000K	15W/m	>90Ra	2100LM/m	5m	
R420/283564CW24	84pcs	2835 SMD	6000K	15W/m	>90Ra	2100LM/m	5m	

20W 2900 lm 112LED/m




Versione DC24V: ogni 7 LED/62.5mm
DC24V versione: every 7 LED/62.5mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	Leds/m	LED TYPE	CCT	Potenza Wattage	CRI	Lumen	Max length connectable	IP
R560/283520WW24	112pcs	2835 SMD	3000K	20W/m	>90Ra	2900LM/m	5m	20
R560/283520NW24	112pcs	2835 SMD	4000K	20W/m	>90Ra	2900LM/m	5m	
R560/283520CW24	112pcs	2835 SMD	6000K	20W/m	>90Ra	2900LM/m	5m	
R560/283564WW24	112pcs	2835 SMD	3000K	20W/m	>90Ra	2900LM/m	5m	64
R560/283564NW24	112pcs	2835 SMD	4000K	20W/m	>90Ra	2900LM/m	5m	
R560/283564CW24	112pcs	2835 SMD	6000K	20W/m	>90Ra	2900LM/m	5m	



25W 3600 lm 140LED/m

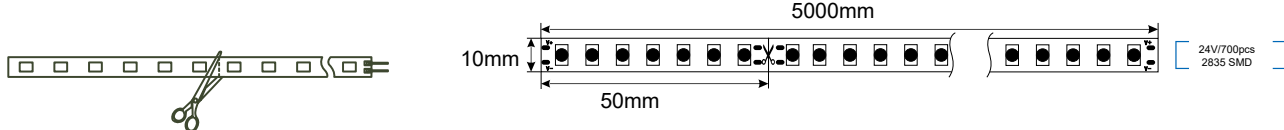


Versione DC24V: ogni 7 LED/50mm
DC24V version: every 7 LED/50mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	Leds/m	LED TYPE	CCT	Potenza Wattage	CRI	Lumen	Max length connectable	IP
R700/283520WW24	140pcs	2835 SMD	3000K	25W/m	>90Ra	3600LM/m	5m	20
R700/283520NW24	140pcs	2835 SMD	4000K	25W/m	>90Ra	3600LM/m	5m	
R700/283520CW24	140pcs	2835 SMD	6000K	25W/m	>90Ra	3600LM/m	5m	
R700/283564WW24	140pcs	2835 SMD	3000K	25W/m	>90Ra	3600LM/m	5m	64
R700/283564NW24	140pcs	2835 SMD	4000K	25W/m	>90Ra	3600LM/m	5m	
R700/283564CW24	140pcs	2835 SMD	6000K	25W/m	>90Ra	3600LM/m	5m	

30W 4200 lm 168LED/m

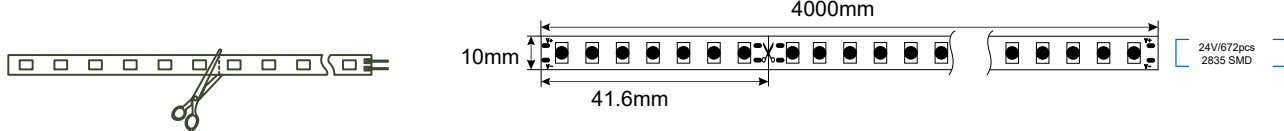

Versione DC24V: ogni 7 LED/41.6mm
DC24V version: every 7 LED/41.6mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	Leds/m	LED TYPE	CCT	Potenza Wattage	CRI	Lumen	Max length connectable	IP
R840/283520WW24	168pcs	2835 SMD	3000K	30W/m	>90Ra	4200LM/m	4m	20
R840/283520NW24	168pcs	2835 SMD	4000K	30W/m	>90Ra	4200LM/m	4m	
R840/283520CW24	168pcs	2835 SMD	6000K	30W/m	>90Ra	4200LM/m	4m	
R840/283564WW24	168pcs	2835 SMD	3000K	30W/m	>90Ra	4200LM/m	4m	64
R840/283564NW24	168pcs	2835 SMD	4000K	30W/m	>90Ra	4200LM/m	4m	
R840/283564CW24	168pcs	2835 SMD	6000K	30W/m	>90Ra	4200LM/m	4m	




LED STRIP RGB SERIES



- Striscia led flessibile su circuito bianco riflettente.
- Le versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
- IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
- La striscia è fornita in bobina da 5m.
- Temperatura di Lavoro: -20°C ~ +35°C

- Flexible led strips with reflective white circuit
- The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- IP64 is protected with silicone, IP67 is protected with the silicone tube
- The strip is supplied in 5m/reel
- Working temperature: -20°C ~ +35°C



Versione DC24V: ogni 6 LED/100mm
DC24V versione: every 6 LED/100mm


Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R300RGB2024	60/m	RGB	4.8-14.4W/m	560LM/m	5m	20
R300RGB6424	60/m	RGB	4.8-14.4W/m	500LM/m	5m	64
R300RGB6724	60/m	RGB	4.8-14.4W/m	480LM/m	5m	67



- Striscia led flessibile su circuito bianco riflettente.
- La versione IP20 e IP64 hanno il nastro adesivo 3M sul retro per rapido innesto su profili di alluminio o superfici dissipative.
- IP64 è protetto con silicone, IP67 è protetto con la guaina silicone.
- La striscia è fornita in bobina da 5m.
- Temperatura di Lavoro: -20°C ~ +35°C

- Flexible led strips with reflective white circuit
- The IP20 and IP64 versions have 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- IP64 is protected with silicone, IP67 is protected with the silicone tube
- The strip is supplied in 5m/reel
- Working temperature: -20°C ~ +35°C



Versione DC24V: ogni 6 LED/100mm
DC24V versione: every 6 LED/100mm

Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	n° Led	CCT	Potenza Wattage	Lumen	Max length connectable	IP
R300RGBWW2024	60/m	RGB+WW	4.8-19.2W/m	560LM/m	5m	20
R300RGBNW2024	60/m	RGB+NW	4.8-19.2W/m	500LM/m	5m	
R300RGBCW2024	60/m	RGB+CW	4.8-19.2W/m	480LM/m	5m	
R300RGBWW6424	60/m	RGB+WW	4.8-19.2W/m	560LM/m	5m	64
R300RGBNW6424	60/m	RGB+NW	4.8-19.2W/m	500LM/m	5m	
R300RGBCW6424	60/m	RGB+CW	4.8-19.2W/m	480LM/m	5m	
R300RGBWW6724	60/m	RGB+WW	4.8-19.2W/m	560LM/m	5m	67
R300RGBNW6724	60/m	RGB+NW	4.8-19.2W/m	500LM/m	5m	
R300RGBCW6724	60/m	RGB+CW	4.8-19.2W/m	480LM/m	5m	



TUNABLE WHITE LED STRIP



- Flexible led strips with reflective white circuit
- 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- The strip is supplied in 5m/reel
- Energy saving class: G
- Temperatura di Lavoro: -20°C ~ +35°C

- Strisce led flessibile cu circuito bianco riflettente
- 3M sul retro rapido innesto su profili di alluminio o superfici dissipative
- La striscia è fornita in bobina da 5m
- Classe risparmio energetico: G
- Temperatura di lavoro: -20°C ~ +35°C




Dimmable & Tunable

14.4-28.8W 2200-6500K 2070-2300 lm



Versione DC24V: ogni 6 LED/50mm
DC24V versione: every 6 LED/50mm



Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

Codice Code	Colore Colour	Potenza Wattage	Lumen	Max length connectable	IP
R600/35272024	Bianco White	28.8W/m	2070-2300LM/m	3m	20




LED COB LED STRIP SERIES

14W
900 lm



- Strisce led flessibile cu circuito bianco riflettente
- 3M sul retro rapido innesto su profili di alluminio o superfici dissipative
- La striscia è fornita in bobina da 5m
- Classe risparmio energetico: G
- Temperatura di Lavoro: -20°C ~ +35°C
- Disponibile anche 2700K su richiesta

- Flexible led strips with reflective white circuit
- 3M adhesive tape on the back, quick attachment to aluminum profiles or dissipative surfaces
- The strip is supplied in 5m/reel
- Energy saving class: G
- Working temperature: -20°C ~ +35°C
- Available on request 2700K




Si consiglia di installare le strisce led nei profili di alluminio per una buona dissipazione.
It is recommended to install the LED strips in aluminum profiles for good dissipation.

CRI > 90 Step MacAdam:3


Codice Code	CCT	Potenza Wattage	Lumen	CRI	Max Length to be Connected	IP
RCOBK3	3000K	14W/m	900LM/m	>90Ra	≤5m	20
RCOBK4	4000K	14W/m	900LM/m	>90Ra	≤5m	
RCOBK6	6000K	14W/m	900LM/m	>90Ra	≤5m	





Strip LED singola, lunghezza massima collegabile per singola strip 5 m.

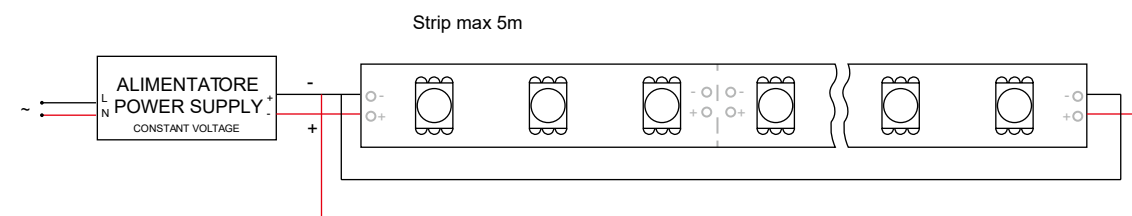

Strip LED RGB, collegamento doppio, lunghezza massima collegabile per singola strip 5 m.

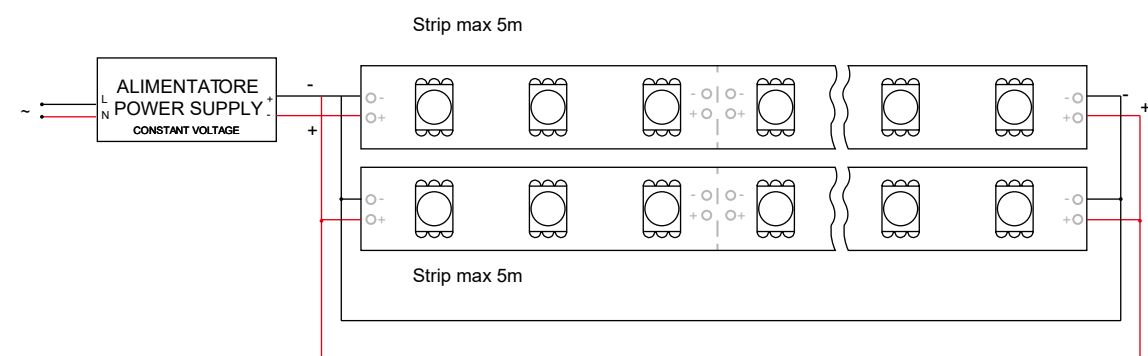

Strip LED dimmerate, collegamento multiplo, lunghezza massima collegabile per singola strip 5 m.

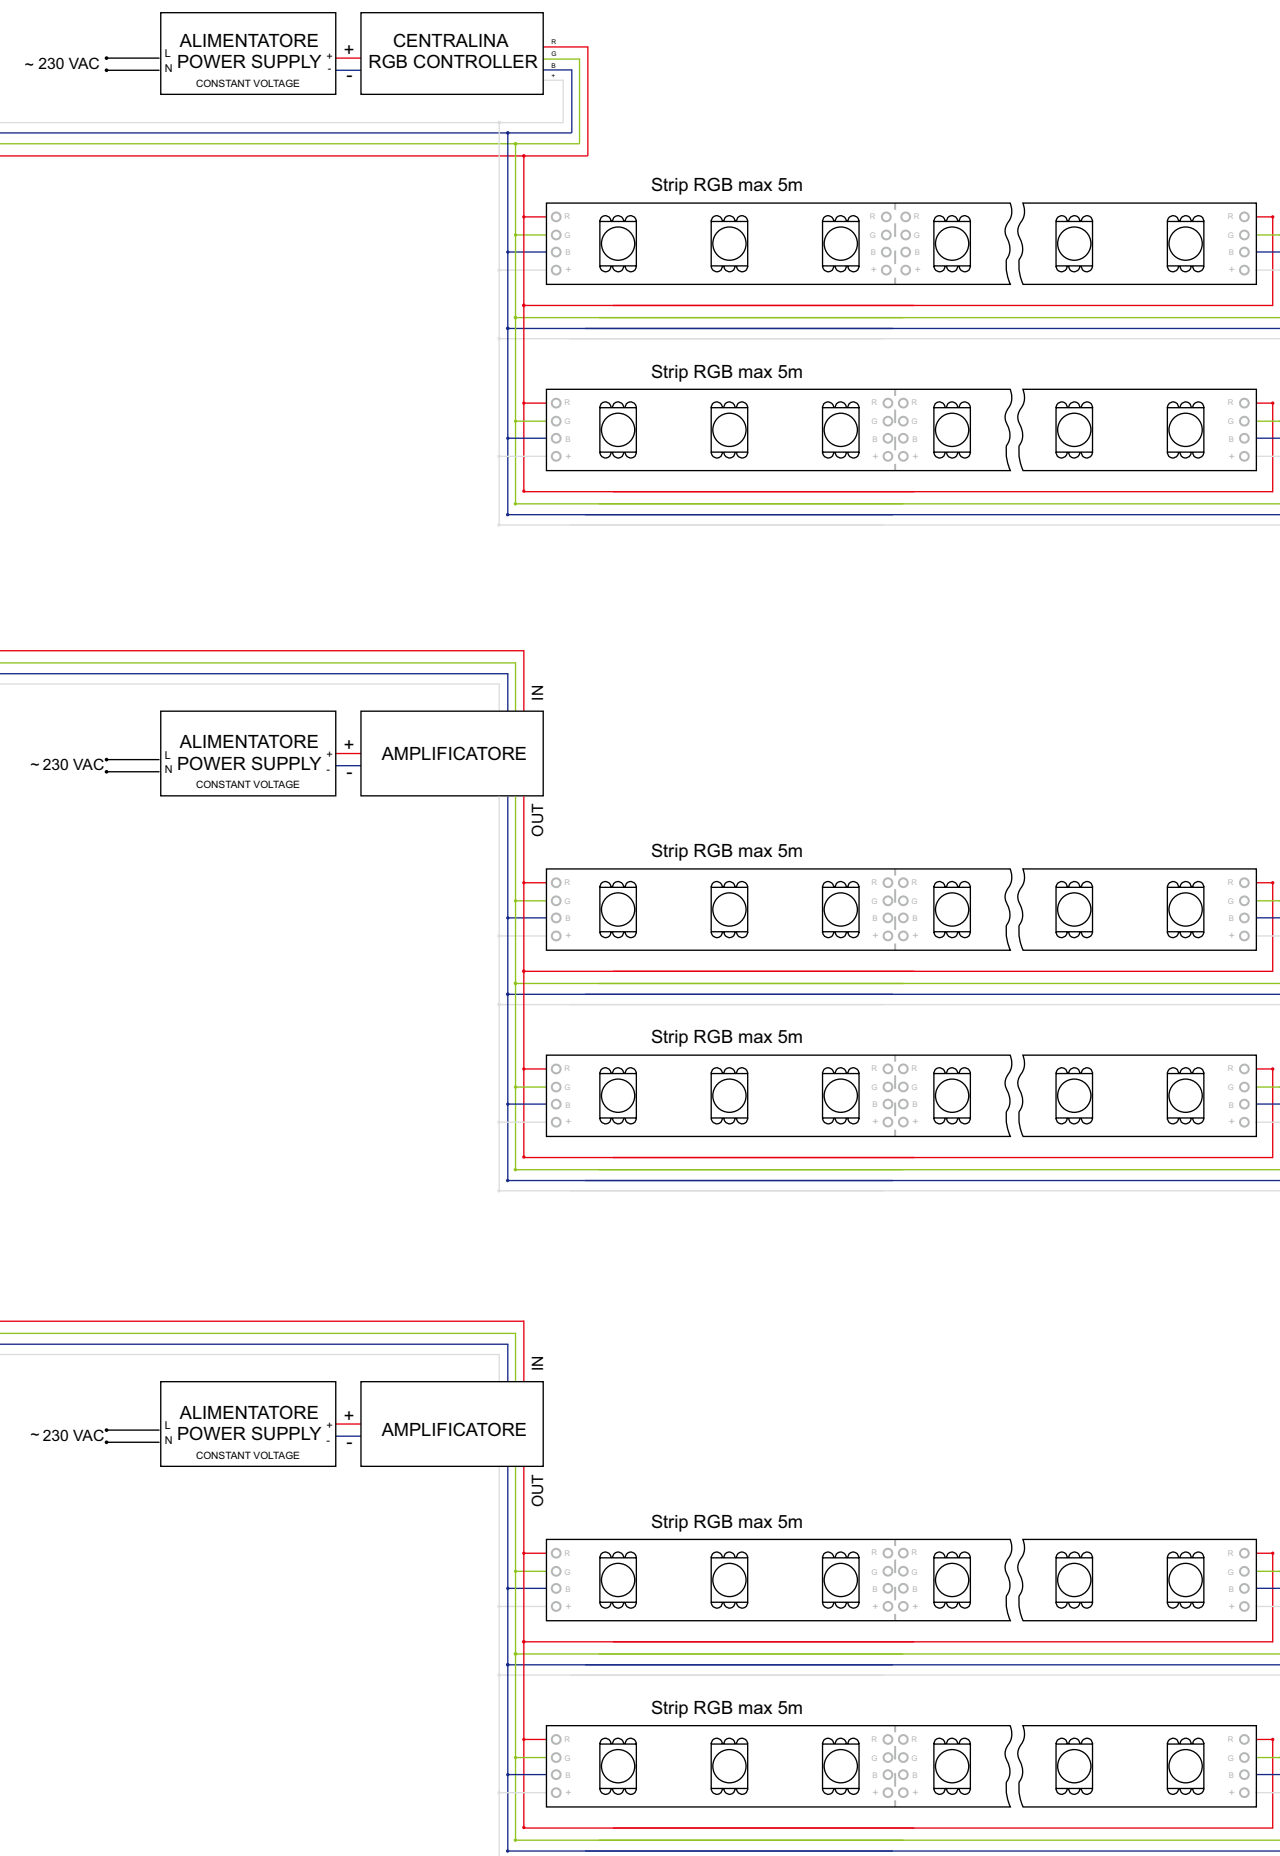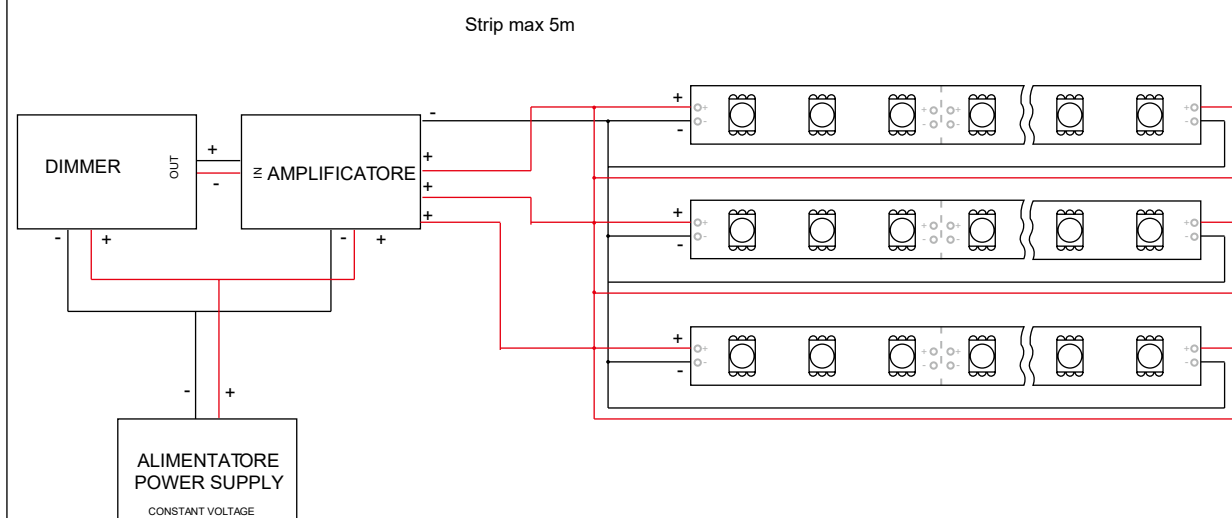


NEON FLEX STRIP

14.4W
900 lm
120LED/m







CRI > 90 IP68 Step MacAdam:3

Codice Code	Leds/m	CCT	Potenza Wattage	Lumen	CRI	Strip Width	Max Length to be Connercted
K0612K3	120pcs	3000K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612K4	120pcs	4000K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612K6	120pcs	6500K	14.4W/m	450LM/m	>90Ra	6mm	≤5m
K0612R	120pcs	Red	14.4W/m	—	>90Ra	6mm	≤5m
K0612G	120pcs	Green	14.4W/m	—	>90Ra	6mm	≤5m
K0612B	120pcs	Blue	14.4W/m	—	>90Ra	6mm	≤5m
K0612Y	120pcs	Yellow	14.4W/m	—	>90Ra	6mm	≤5m
K0612-RGB	120pcs 4040RGB	RGB	9.6-28.8W/m	—	>90Ra	6mm	≤10m



Dimension

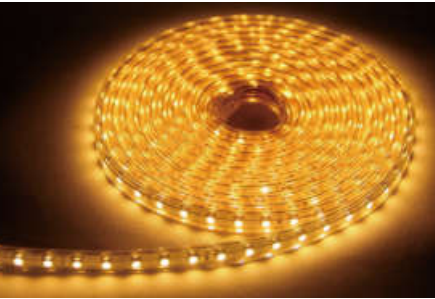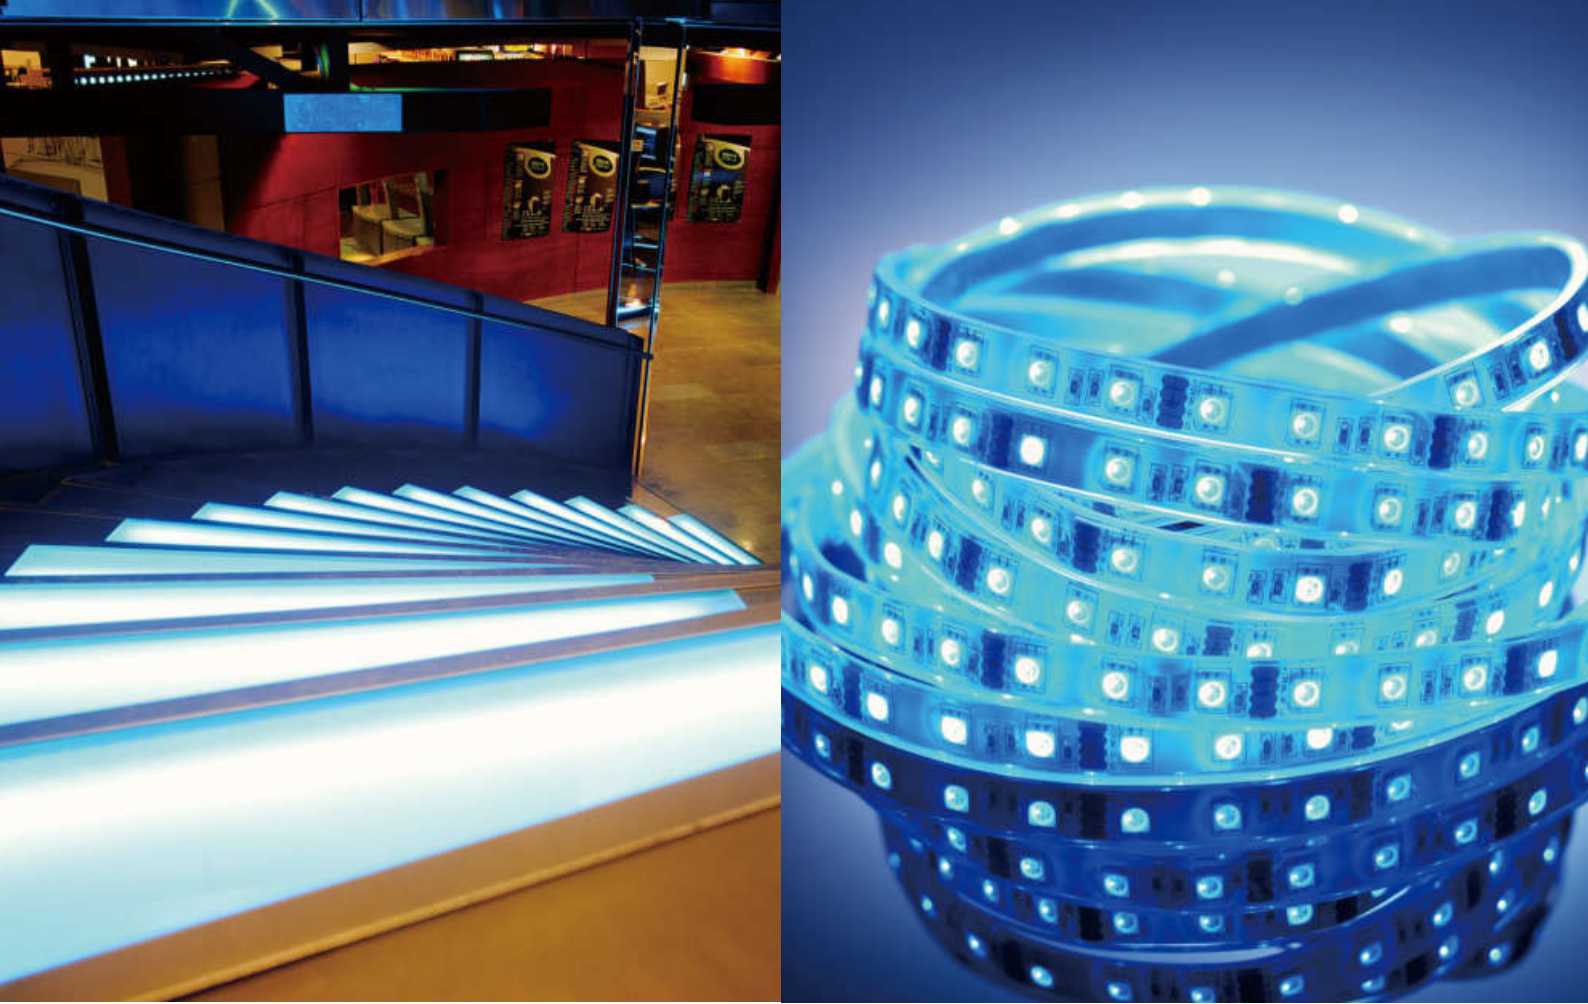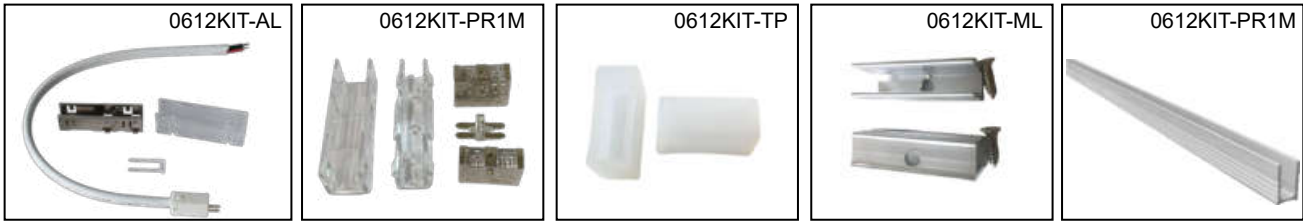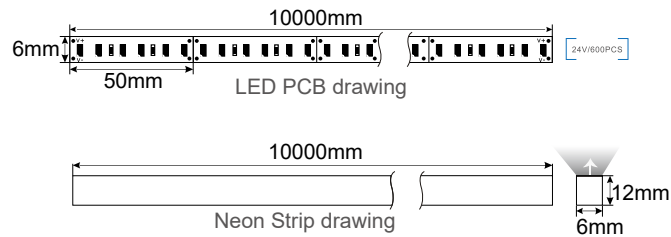


Step1: EASE OF USE AND SIMPLICITY OF INSTALLATION

As our most versatile lighting solutions, our LED strip and flex works perfectly in an array of applications, and it comes a no surprise that these solutions are more in-demand than ever. As result, we're making it even easier for you to incorporate LED strip in to a lighting design scheme. Now, you can receive custom lengths of our popual LED strip and flex, Pre- cut to your specifications. In order to offer such a service, we have made investments at our Welwyn Garden facility, in both equipment and training. Our customers can now benefit from the following services.



Step 2: YOUR VISION, OUR TECHNICAL KNOW-HOW

We will custom fit LED strip to meet the dimensions of any bespoke site or project need, we can cut strip to the nearest cut point. The advantage of cutting LED strip to length in our factory removes expensive on-site time for our customers and means you get the right lengths pre-cut and ready to install fast All cutting and modifications take place at our Welwyn Garden City modification centre, where our highly trained team will conduct the necessary adjustments to meet your requirements, delivering consistency and eliminating the hassle of what can be daunting step in the installation process.

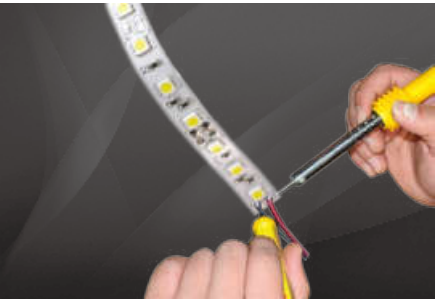

Step 3: ELECTRICAL CONNECTIONS

We know that preparing the "tails" LED strip and getting them soldered on site can be challenging, particularly when LED strip is hidden from vies and connections are difficult to reach We want to make the process of installing our LED strip as easy as possible, and to that end we have introduced a service to add connection tails to any of our standard LED strip. This includes adding tails to any LED strip that has been cut to a specified length.

Power Supply & Controller


■ PRESTAZIONI / PERFORMANCE

I nostri alimentatori e controller per STRIP LED sono dotati di protezione contro corto circuito, sovraccarico e protezione termica. La gamma di alimentatori offre la scelta tra la tensione 12V e 24V e grado di protezione IP20 e IP67, fornendo inoltre diverse potenze tra cui scegliere. La gamma di controller consente la possibilità di dimmerare e gestire la luce delle nostre STRIP LED.

.....
Safety performance is superior, have the surge, thermal overload short circuit protection etc.



CONSTANT VOLTAGE LED DRIVER

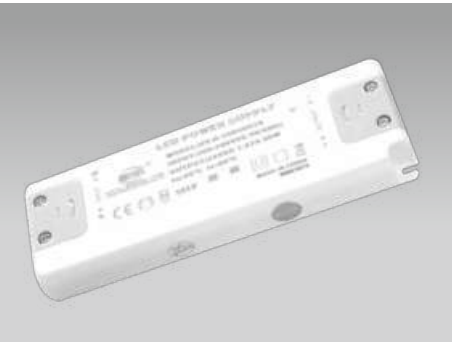


- Design ultrasottile indipendente
 - Viti terminali catturate
 - Protezioni: opencircuit, cortocircuito, sovraccarico, sovratemperatura
 - Equivalente SELV
 - Classe di prelievo II
- Independent ultrathin design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - SELV equivalent
 - Protection class II

Normative

EN61347-1; EN61347-2-13 (safety)
EN61000-3-2 (correnti armoniche)
EN61000-3-3 (flicker)
RoHS


Ingresso ed Uscita su morsetti serrafile, protetti.

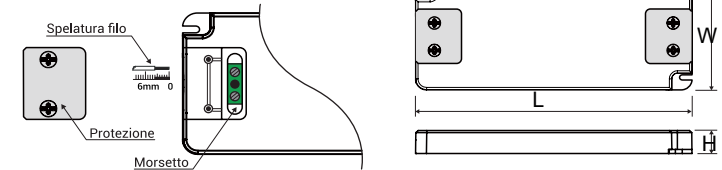

Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions	Net Weight
UT12V/20W	220-240V	20W	12V	1.67A	0.50C	80%	45°C	85°C	128x50x13mm	0.08Kg
UT24V/20W	220-240V	20W	24V	0.83A	0.50C	82%	45°C	85°C	128x50x13mm	0.08Kg
UT12V/30W	220-240V	30W	12V	2.5A	0.95	88%	40°C	90°C	155x53x16mm	0.11Kg
UT24V/30W	220-240V	30W	24V	1.25A	0.95	89%	40°C	90°C	155x53x16mm	0.11Kg
UT12V/50W	100-240V	50W	12V	4.16A	0.95	86%	50°C	85°C	185x62x22mm	0.23Kg
UT24V/50W	100-240V	50W	24V	2.1A	0.95	86%	50°C	85°C	185x62x22mm	0.23Kg



- Design compatto indipendente
 - Viti terminali catturate
 - Protezioni: opencircuit, cortocircuito, sovraccarico, sovratemperatura
 - Installazione semplice
 - Equivalente SELV
 - Classe di prelievo II
- Independent compact design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - Simple installation
 - SELV equivalent
 - Protection class II

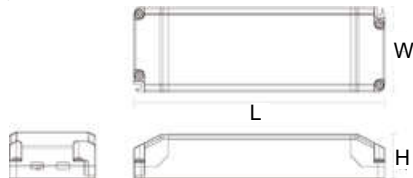

Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions	Net Weight
Q8H-12V-75W	220-240V	75W	12V	6.3A	0.95	88%	50°C	85°C	184x61x32mm	0.27Kg
Q8H-24V-75W	220-240V	75W	24V	3.1A	0.95	89%	50°C	85°C	184x61x32mm	0.27Kg
Q3-12V-100W	220-240V	100W	12V	8.3A	0.95	90%	45°C	85°C	184x61x32mm	0.30Kg
Q3-24V-100W	220-240V	100W	24V	4.16A	0.95	92%	45°C	85°C	184x61x32mm	0.30Kg
Q8H-12V-150W	220-240V	100W	12V	12.5A	0.95	90%	45°C	85°C	210x67x34mm	0.32Kg
Q8H-24V-150W	220-240V	100W	24V	6.25A	0.95	91%	45°C	85°C	210x67x34mm	0.32Kg



CONSTANT VOLTAGE LED DRIVER



- Design super sottile
 - Viti terminali catturate
 - Protezioni: circuito aperto, corto circuito, sovraccarico, sovratemperatura
 - Equivalente SELV
 - Classe di protezione II
- Super slim design
 - Captured terminal screws
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - SELV equivalent
 - Protection class II

Normative

EN61347-1 (safety)
EN61347-2-13 (safety)
EN62493 (EMF)
EN55015 (emissioni)

EN61547 (immunità)
EN61000-3-2 (correnti armoniche)
EN61000-3-2 (flicker)



Codice Code	Input Voltage	Max. output	Output Voltage	Output current	PF	Efficiency	Ta	Tc	Dimensioni Dimensions	Net Weight
LT-60-12	220-240V	60W	12V	5.0A	0.95	90%	50°C	75°C	305x30x17mm	0.152Kg
LT-60-24	220-240V	60W	24V	2.5A	0.95	91%	50°C	75°C	305x30x17mm	0.152Kg
LT-75-12	220-240V	75W	12V	6.25A	0.95	90%	50°C	90°C	305x30x17mm	0.152Kg
LT-75-24	220-240V	75W	24V	3.125A	0.95	91%	50°C	90°C	305x30x17mm	0.152Kg
LT-100-12	220-240V	100W	12V	8.34A	0.95	91%	45°C	90°C	312x30x18.2mm	0.17Kg
LT-100-24	220-240V	100W	24V	4.17A	0.95	92%	45°C	90°C	312x30x18.2mm	0.17Kg




CONTROLLER & AMPLIFIER

0848-MONO-RIC



Controllore mono colore a 4 zone

- 2,4 Ghz RF controllabile a distanza, entro 30 metri
- Regolazione luminosità



Input Voltage	Output	Control Distance	Size
DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	85x45x22.5mm

4-Zone Single Color LED Strip Controller

- 2,4Ghz RF remote controllabile, control distance whtin 30 meters
- Brightness Dimming

1127-CCT-RIC



Controllore Bianco dinamico a 4 zone

- 2,4 Ghz RF controllabile a distanza, entro 30 metri
- Intensità della luce dimmerabile e la temperatura colore regolabile



Input Voltage	Output	Control Distance	Size
DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	85x45x22.5mm

4-Zone Dual White LED Strip Controller


- 2,4Ghz RF remote controllabile, control distance whtin 30 meters
- Dimmable & Color temperature adjustable

0613-MONO/CCT-CONTR



Telecomando Mono Colore / Bianco dinamico a 4 zone


- Dimmerare l'intensità della luce e regolare la temperatura colore
- Controllare 4 zone separatamente



4-Zone Dual White Remote Control

- Dimmable and color temperature adjustable
- Individided 4 zone group lighting separately

Touch dimmer
K-1040-IC320

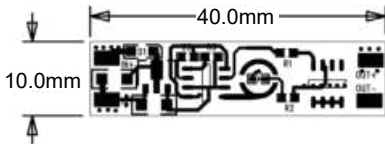

Codice Code	Tensione Voltage	Corrente current	Potenza Wattage	Dimensioni Dimensions
K-1040-IC320	DC8-24V	≤8A	≤192W	40x10mm



CONTROLLER & AMPLIFIER

CONTROLLER RGB+W
Z9506



Controllore RGB+W

- Controllare i colori e l'intensità della strisce RGB+W
- 2,4 Ghz RF controllabile a distanza, entro 30 metri



Input Voltage	Output	Control Distance	Size
DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85x45x22.5mm Remote: 110x53x20.5mm

Touch RGBW LED Strip Control System

- RGB+W Color changing & Brightness Dimmable
- 2,4Ghz RG Remote controllabile, control distance within 30 meters

CONTROLLER RGB
Z9508



Controllore RGB

- Controllare i colori e l'intensità della strisce RGB
- 2,4 Ghz RF controllabile a distanza, entro 30 metri



Input Voltage	Output	Control Distance	Size
DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85x45x22.5mm Remote: 110x53x20.5mm

Touch RGB LED Strip Control System

- RGB Color changing & Brightness Dimmable
- 2,4Ghz RG Remote controllabile, control distance within 30 meters

Amplificatore
Amplifier
2207-AMP



Amplificatore a 4 canali


- Amplificando i segnali, si può collegare le strisce a una lunghezza illimitata.



Input Voltage	Output	Working Temperature	Size
DC12V-24V	Max. 6A/Channel Total output Max.15A	-20~60°C	119x46.5x22.5mm

4-Channel High Performance Amplier

- Amplifying the receiving signals, the strip lights can extend to limitless length.

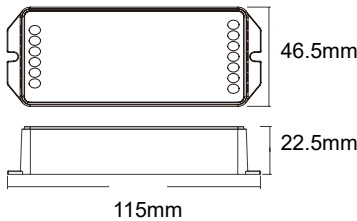




LED Profile

■ PRESTAZIONI / PERFORMANCE

Estrusi d'alluminio studiati e progettati per garantire la miglior dissipazione di calore per le nostre STRIP LED. La gamma offre diverse modalità d'applicazione ed ogni tipologia è dotata dei suoi accessori.

LED PROFILE SERIES

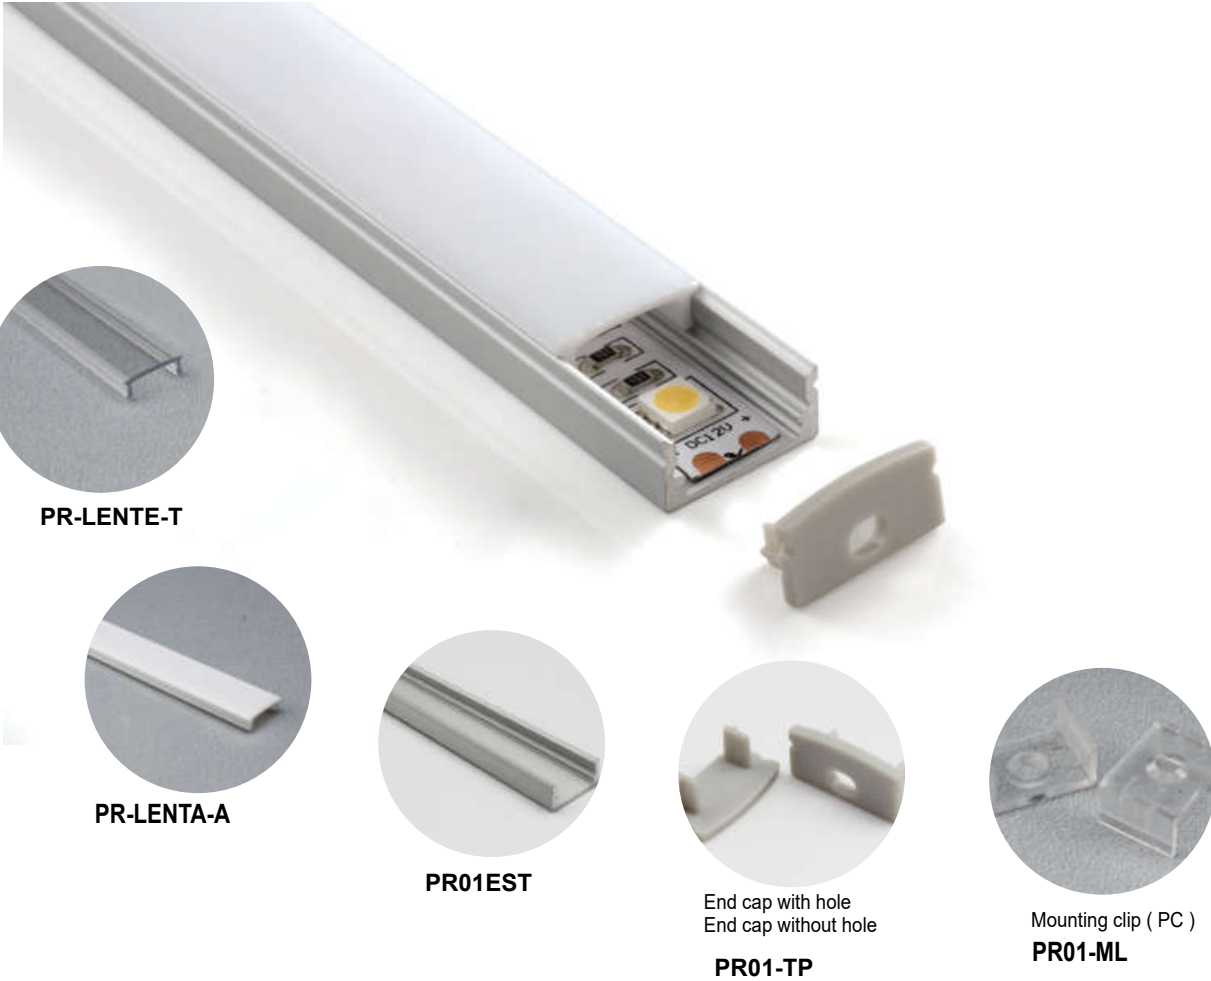


Dissipazione fino a 15W/m

Codice Code	Caratteristiche Features
PR01EST	PROFILI ESTERNO RETTANGOLARE 2MT
PR01-TP	COPPIA TAPPI 1PZ CON FORO + 1PZ SENZA FORO
PR01-ML	CLIP PER PR01EST
PR-LENTE-A	SCHERMO OPALINA
PR-LENTE-T	SCHERMO TRASPARENTE



■ Dimension

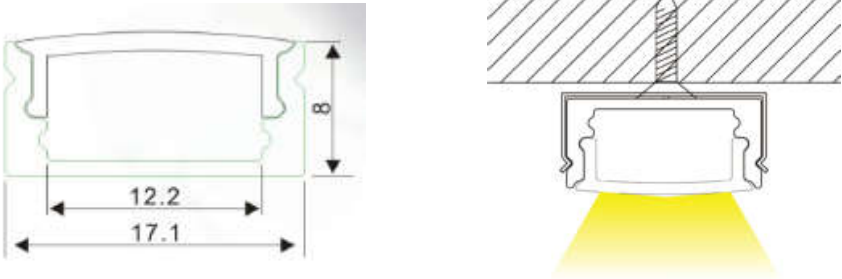

LED PROFILE SERIES




Dissipazione fino a 15W/m

Codice Code	Caratteristiche Features
PR03INC	PROFILI DA INCASSO SEZIONE 2MT
PR03-TP	COPPIA TAPPI 1PZ CON FORO + 1PZ SENZA FORO
PR-LENTE-A	SCHERMO OPALINA
PR-LENTE-T	SCHERMO TRASPARENTE



■ Dimension

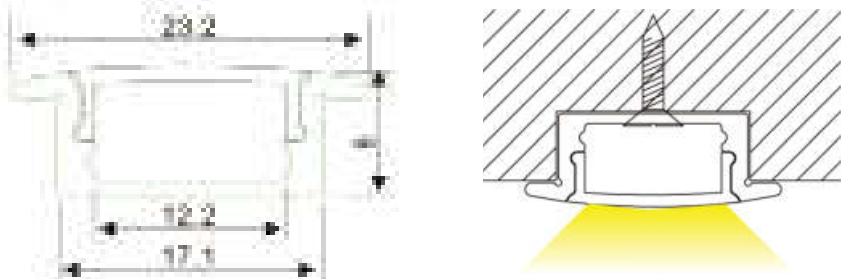

LED PROFILE SERIES




Dissipazione fino a 20W/m


Codice Code	Caratteristiche Features
PR04ANG	PROFILI ANGOLARE 2MT
PR04-TP	COPPIA TAPPI 1PZ CON FORO + 1PZ SENZA FORO
PR04-ML	CLIP PER PR04ANG
PR-LENTE-A	SCHERMO OPALINA
PR-LENTE-T	SCHERMO TRASPARENTE



Dimension

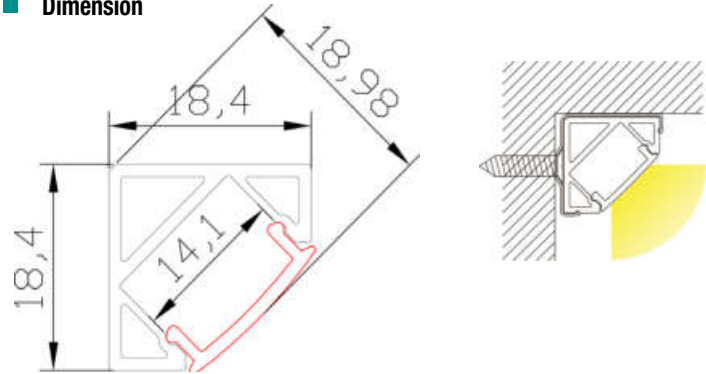


LED PROFILE SERIES

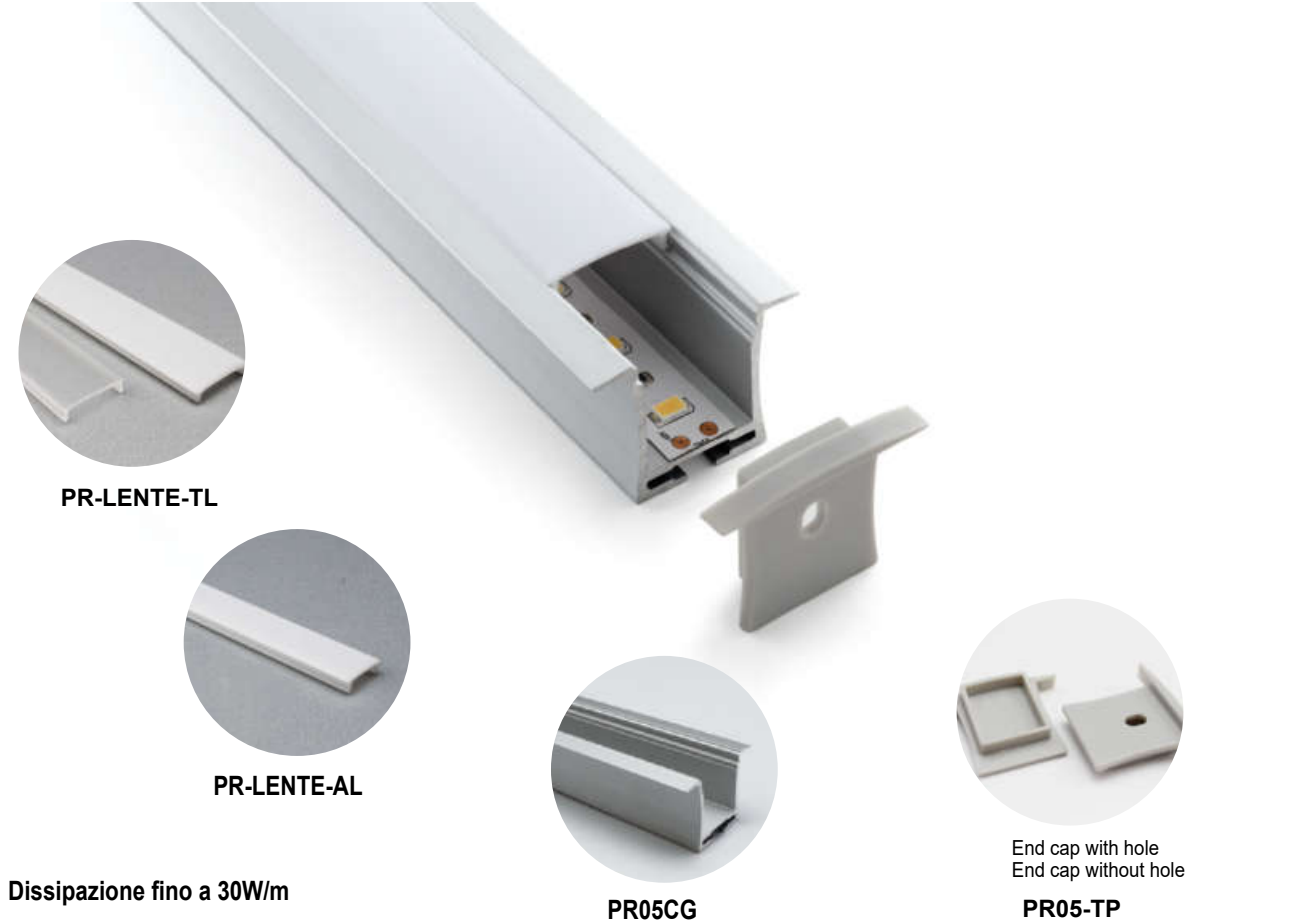


Dissipazione fino a 30W/m

Codice Code	Caratteristiche Features
PR05CG	PROFILI DA INCASSO CARTONGESSO 2MT
PR05-TP	COPPIA TAPPI 1PZ CON FORO + 1PZ SENZA FORO
PR05-ML	MOLLE DI MONTAGGIO PER PR05CG
PR-LENTE-AL	SCHERMO OPALINA
PR-LENTE-TL	SCHERMO TRASPARENTE

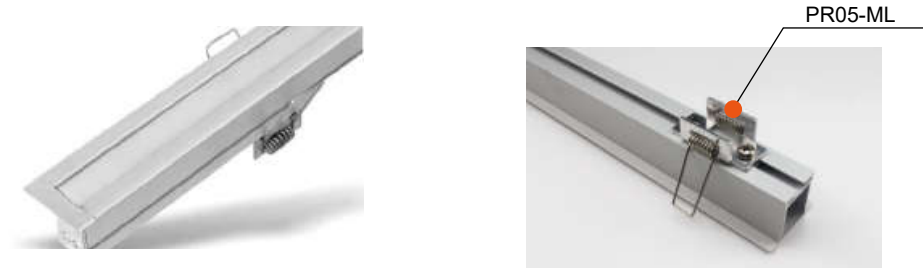

Dimension

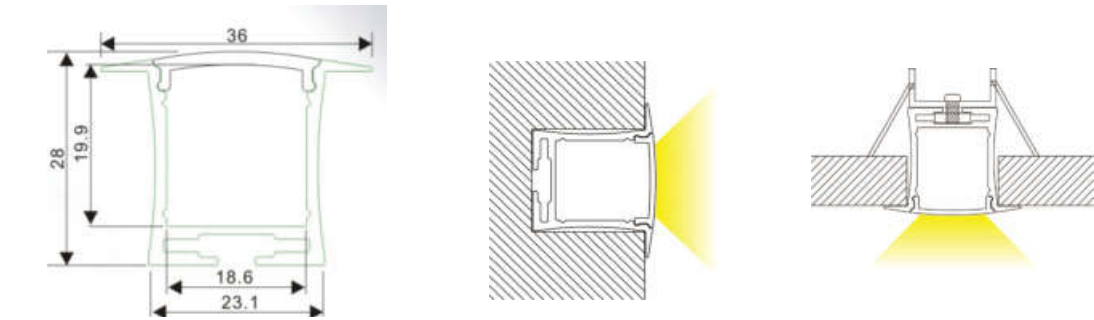

LED PROFILE SERIES




PR06PMMA



End cap with hole
End cap without hole

PR06-TP



Mounting clip


PR06-ML

Dissipazione fino a 15W/m

Codice Code	Caratteristiche Features
PR06	PROFILO 2M
PR06-TP	COPPIA TAPPI 1PZ CON FORO + 1PZ SENZA FORO
PR06-ML	CLIP PER PR06ANG
PR06PMMA	SCHERMO OPALINA SEMI-TRASPARENTE



■ Dimension





Handwriting practice lines on the left page, consisting of 20 horizontal dashed lines.

Handwriting practice lines on the right page, consisting of 20 horizontal dashed lines.

DOMOTICA

 **Star System®**
Distribuzione sistemi di sicurezza

Via Comunità Economica Europea, 41
95045 Misterbianco (CT)
+39 095 483 720
info@starsystemsrl.it
www.starsystemsrl.it